



Figure similar

AS Interface user module IP67 Phased-out product !!! For further information, please contact our sales department digital, 4DQ 4 x output, 1 A 24 V DC maximal 2 A for all outputs 4 x M12 socket


General technical data		
design of the product		digital I/O modules for operation in the field, IP67 - user modules
design of the device type		standard slave
protocol is supported AS-Interface protocol		Yes
type of electrical connection of the inputs and outputs		M12 screw-type terminals
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		K
Inputs		
number of digital inputs		0
type of voltage of the input voltages		DC
Outputs		
number of digital outputs		4
type of voltage of output voltages		DC
output voltage at DC at 24 V	V	22 ... 24
output current at digital output for signal <1> rated value	A	1
type of switching output		transistor
property of the output short-circuit proof		Yes
Ambient conditions		
ambient temperature		
• during storage	°C	-40 ... +85
• during operation	°C	-25 ... +85
protection class IP		IP67
Mechanical data		
width	mm	45
height	mm	90
depth	mm	27
fastening method		standard rail mounting/wall mounting using coupling module
Certificates/ approvals		
General Product Approval	Maritime application	other



[Confirmation](#)

other

Environment

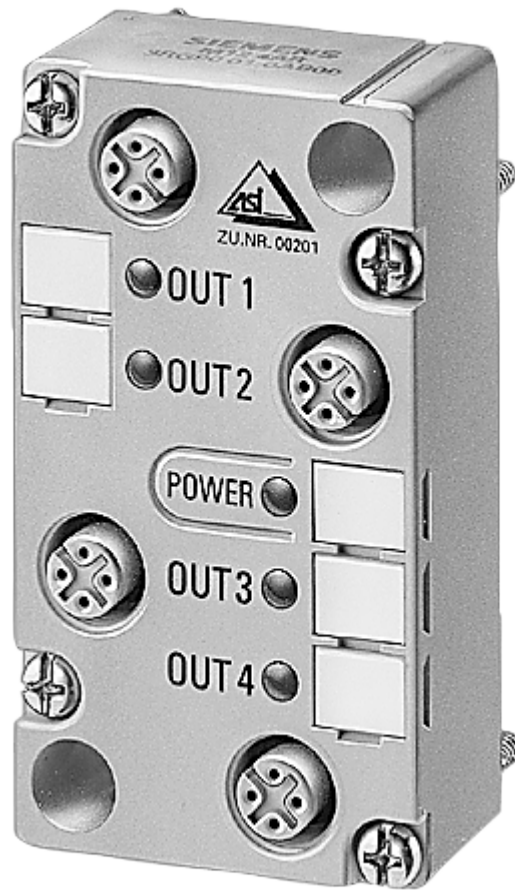

last modified:

9/18/2025 