

Product datasheet

Specifications



servo motor BSH, Lexium 05,
0.7N.m, 8000rpm, 70mm, untapped
shaft, Sincos multi turn, without
brake, IP65

BSH0701T22A2A

! Discontinued

EAN Code: 3389118136076

Main

Device short name	BSH
Product or component type	Servo motor
Maximum mechanical speed	8000 rpm
Continuous stall torque	<p>1.3 N.m for LXM32.U90M2 at 3 A, 230 V, single phase</p> <p>1.4 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05BD10M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05CD10M3X at 6 A, 200...240 V, three phase</p> <p>1.4 N.m for LXM15LD13M3, 230 V, single phase</p> <p>1.4 N.m for LXM05AD10F1, 110...120 V, single phase</p> <p>1.4 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>1.4 N.m for LXM05BD10F1, 110...120 V, single phase</p> <p>1.4 N.m for LXM05BD17M2, 200...240 V, single phase</p> <p>1.4 N.m for LXM05CD10F1, 110...120 V, single phase</p> <p>1.4 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>1.4 N.m for LXM32.D18M2 at 6 A, 115 V, single phase</p> <p>0.7 N.m for LXM15LU60N4, 400 V, three phase</p> <p>0.7 N.m for LXM15LU60N4, 480 V, three phase</p> <p>0.91 N.m for LXM15LU60N4, 230 V, three phase</p> <p>1.4 N.m for LXM15LD10N4, 230 V, three phase</p> <p>1.4 N.m for LXM15LD10N4, 400 V, three phase</p> <p>1.4 N.m for LXM15LD10N4, 480 V, three phase</p> <p>1.4 N.m for LXM15LD13M3, 230 V, three phase</p> <p>1.4 N.m for LXM15LD21M3, 230 V, three phase</p> <p>1.4 N.m for LXM05AD17M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05BD17M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05CD17M3X, 200...240 V, three phase</p>
Peak stall torque	<p>3.5 N.m for LXM32.U90M2 at 3 A, 230 V, single phase</p> <p>3.19 N.m for LXM15LD13M3, 230 V, single phase</p> <p>2.42 N.m for LXM05AD10F1, 110...120 V, single phase</p> <p>3.19 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>2.42 N.m for LXM05BD10F1, 110...120 V, single phase</p> <p>3.19 N.m for LXM05BD17M2, 200...240 V, single phase</p> <p>2.42 N.m for LXM05CD10F1, 110...120 V, single phase</p> <p>3.19 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>3.5 N.m for LXM32.D18M2 at 6 A, 115 V, single phase</p> <p>1.9 N.m for LXM15LU60N4, 400 V, three phase</p> <p>1.9 N.m for LXM15LU60N4, 480 V, three phase</p> <p>1.9 N.m for LXM15LU60N4, 230 V, three phase</p> <p>2.91 N.m for LXM15LD10N4, 230 V, three phase</p> <p>2.91 N.m for LXM15LD10N4, 400 V, three phase</p> <p>2.91 N.m for LXM15LD10N4, 480 V, three phase</p> <p>3.19 N.m for LXM15LD13M3, 230 V, three phase</p> <p>3.19 N.m for LXM15LD21M3, 230 V, three phase</p> <p>2.42 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>3.19 N.m for LXM05AD17M3X, 200...240 V, three phase</p> <p>2.42 N.m for LXM05BD10M3X, 200...240 V, three phase</p> <p>3.19 N.m for LXM05BD17M3X, 200...240 V, three phase</p> <p>2.42 N.m for LXM05CD10M3X, 200...240 V, three phase</p> <p>3.19 N.m for LXM05CD17M3X at 6 A, 200...240 V, three phase</p>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Nominal output power	<p>500 W for LXM32.U90M2 at 3 A, 230 V, single phase 350 W for LXM32.D18M2 at 6 A, 115 V, single phase 400 W for LXM05AD10M3X, 200...240 V, three phase 400 W for LXM05BD10M3X, 200...240 V, three phase 400 W for LXM05CD10M3X, 200...240 V, three phase 380 W for LXM05AD10F1, 110...120 V, single phase 380 W for LXM05BD10F1, 110...120 V, single phase 380 W for LXM05CD10F1, 110...120 V, single phase 400 W for LXM05AD17M2, 200...240 V, single phase 400 W for LXM05BD17M2, 200...240 V, single phase 400 W for LXM05CD17M2, 200...240 V, single phase 654 W for LXM15LD13M3 at 6 A, 230 V, single phase 1000 W for LXM15LD10N4, 400 V, three phase 1000 W for LXM15LD10N4, 480 V, three phase 400 W for LXM05AD17M3X, 200...240 V, three phase 400 W for LXM05BD17M3X, 200...240 V, three phase 400 W for LXM05CD17M3X, 200...240 V, three phase 440 W for LXM15LU60N4, 230 V, three phase 564 W for LXM15LD10N4, 230 V, three phase 586 W for LXM15LU60N4, 400 V, three phase 586 W for LXM15LU60N4, 480 V, three phase 654 W for LXM15LD13M3, 230 V, three phase 654 W for LXM15LD21M3, 230 V, three phase</p>
-----------------------------	--

Nominal torque	<p>0.94 N.m for LXM32.U90M2 at 3 A, 230 V, single phase 1.25 N.m for LXM15LD13M3, 230 V, single phase 1.36 N.m for LXM32.D18M2 at 6 A, 115 V, single phase 0.7 N.m for LXM15LU60N4, 230 V, three phase 0.7 N.m for LXM15LU60N4 at 6 A, 400 V, three phase 0.7 N.m for LXM15LU60N4, 480 V, three phase 1.23 N.m for LXM15LD10N4, 400 V, three phase 1.23 N.m for LXM15LD10N4, 480 V, three phase 1.25 N.m for LXM15LD10N4, 230 V, three phase 1.25 N.m for LXM15LD13M3, 230 V, three phase 1.25 N.m for LXM15LD21M3, 230 V, three phase</p>
-----------------------	--

Nominal speed	<p>5000 rpm for LXM32.U90M2 at 3 A, 230 V, single phase 3000 rpm for LXM05AD10F1, 110...120 V, single phase 3000 rpm for LXM05BD10F1, 110...120 V, single phase 3000 rpm for LXM05CD10F1, 110...120 V, single phase 3000 rpm for LXM05AD10M3X, 200...240 V, three phase 3000 rpm for LXM05BD10M3X, 200...240 V, three phase 3000 rpm for LXM05CD10M3X, 200...240 V, three phase 8000 rpm for LXM15LD10N4 at 6 A, 400 V, three phase 3000 rpm for LXM05AD17M2, 200...240 V, single phase 3000 rpm for LXM05BD17M2, 200...240 V, single phase 3000 rpm for LXM05CD17M2, 200...240 V, single phase 3000 rpm for LXM05AD17M3X, 200...240 V, three phase 3000 rpm for LXM05BD17M3X, 200...240 V, three phase 3000 rpm for LXM05CD17M3X, 200...240 V, three phase 5000 rpm for LXM15LD13M3, 230 V, single phase 2500 rpm for LXM32.D18M2 at 6 A, 115 V, single phase 5000 rpm for LXM15LD10N4, 230 V, three phase 5000 rpm for LXM15LD13M3, 230 V, three phase 5000 rpm for LXM15LD21M3, 230 V, three phase 6000 rpm for LXM15LU60N4, 230 V, three phase 8000 rpm for LXM15LD10N4, 480 V, three phase 8000 rpm for LXM15LU60N4, 400 V, three phase 8000 rpm for LXM15LU60N4, 480 V, three phase</p>
----------------------	---

Product compatibility	LXM05AD10F1 at 110...120 V single phase LXM05AD17M2 at 200...240 V single phase LXM05BD10F1 at 110...120 V single phase LXM05BD17M2 at 200...240 V single phase LXM05CD10F1 at 110...120 V single phase LXM05CD17M2 at 200...240 V single phase LXM15LD13M3 at 230 V single phase LXM32.U90M2 at 230 V single phase LXM32.D18M2 at 115 V single phase LXM15LU60N4 at 230 V three phase LXM05AD10M3X at 200...240 V three phase LXM05BD10M3X at 200...240 V three phase LXM05CD10M3X at 200...240 V three phase LXM15LD13M3 at 230 V three phase LXM15LU60N4 at 400 V three phase LXM15LU60N4 at 480 V three phase LXM15LD10N4 at 400 V three phase LXM05AD17M3X at 200...240 V three phase LXM05BD17M3X at 200...240 V three phase LXM05CD17M3X at 200...240 V three phase LXM15LD10N4 at 230 V three phase LXM15LD10N4 at 480 V three phase LXM15LD21M3 at 230 V three phase
Shaft end	Untapped
IP degree of protection	IP65 standard IP67 with IP67 kit
Speed feedback resolution	131072 points/turn x 4096 turns
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

Complementary

Range compatibility	Lexium 32 Lexium 05 Lexium 15
supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	3.2 A
maximum continuous power	1.06 W
Maximum current Irms	10 A for LXM32.D18M2 9 A for LXM32.U90M2 9.9 A for LXM15LD13M3 9.9 A for LXM15LD21M3 9.9 A for LXM15LU60N4 9.9 A for LXM15LD10N4
Maximum permanent current	10.1 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	11 mm
Shaft length	23 mm
Feedback type	Multiturn SinCos Hiperface
Motor flange size	70 mm
Number of motor stacks	1
Torque constant	0.44 N.m/A at 120 °C
Back emf constant	26 V/krpm at 120 °C
Number of motor poles	3.0

Rotor inertia	0.25 kg.cm ²
Stator resistance	3.3 Ohm at 20 °C
Stator inductance	6.75 mH at 20 °C
Stator electrical time constant	3.73 ms at 20 °C
Maximum radial force Fr	360 N at 6000 rpm 380 N at 5000 rpm 410 N at 4000 rpm 460 N at 3000 rpm 520 N at 2000 rpm 660 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	154 mm
Centring collar diameter	60 mm
Centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	82 mm
Net weight	2.2 kg
Sizing reference	BSH0701T
Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C
Output current 3s peak	10.1 A
Inertia	0.0 kg.cm ² of brake 0.25 kg.cm ² of motor

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.3 cm
Package 1 Width	12.8 cm
Package 1 Length	37.7 cm
Package 1 Weight	2.1 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	1 100 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	9 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 090 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.2 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	8c11b0c9-e501-4810-83eb-05fc6605ede4
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
PVC free	Yes

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture


End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Performance Curves

115 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive

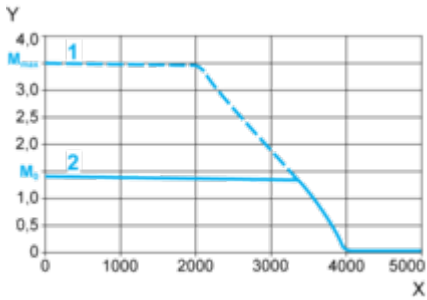

X Speed in rpm

Y Torque in Nm


1 Peak torque

2 Continuous torque

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•U90M2 servo drive

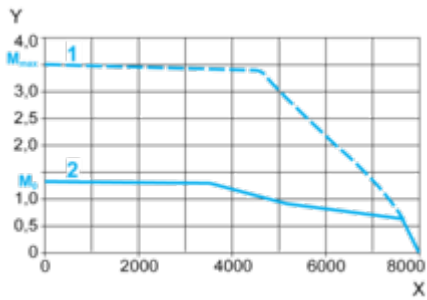

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque