

Product datasheet

Specifications



Display for 15"W, Harmony P6,
1366 x 768 pixel FWXGA, 2 point
multi touch, glass front, IP67F, for
configured products

HMIDM6700WCCTO

Price: 25,899.83 ZAR

Main

Range of product	Harmony P6
Product or component type	Touch panel screen

Complementary

Display size	15.6 inch
Aspect ratio	16:9
Display colour	16 million colours
Pixel resolution	1366 x 768
Inrush current	30 A
Device mounting	Panel mounting Direct mounting VESA
Cut-out dimensions	394 (+ 1/- 0) x 250 (+ 1/- 0) mm
Width	408 mm
Height	264 mm
Net weight	4.0 kg

Environment

Pollution degree	2
Product certifications	RCM KC ATEX CE UKCA DNV (DC model without HDD/fan/ EtherCAT card/22" wide display with expansion slot) ATEX zone 22 dust (DC model, front USB cover must be locked with screw) ATEX zone 2 (DC model, front USB cover must be locked with screw) CULus Class 1 Division 2 (without DIO option) IECEx zone 2 (DC model, front USB cover must be locked with screw) IECEx zone 22 (DC model, front USB cover must be locked with screw)
Operating altitude	2000 m
Ambient air temperature for operation	0...60 °C
Shock resistance	147 m/s² conforming to IEC 61131-2 147 m/s² 3 shocks in each direction X, Y and Z

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Height	15.0 cm
Package 1 Width	28.0 cm
Package 1 Length	39.0 cm
Package 1 Weight	3.5 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	810 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	228 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	575 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	4 kg CO2 eq.

Use Better



Materials and Substances

F-gas free	Only air and vacuum used for insulation / breaking, no F-gas including SF6
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	D7229b34-b75f-4e38-8912-76d4fe04e192
REACH Regulation	REACH Declaration
Halogen-free status	Product contains halogen above thresholds
PVC free	No
Silicone-free	No

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	39
End of life manual availability	End of Life Information
Take-back	No




The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions


15-inch Wide Advanced Model

External Dimensions

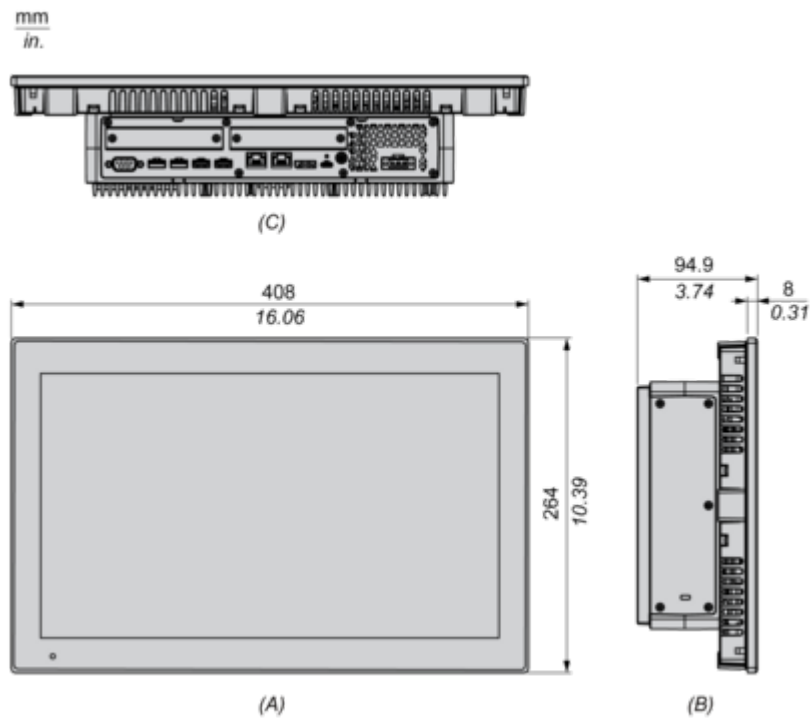


- (A) : Front
- (B) : Left
- (C) : Bottom

External Dimensions with PCI/PCle Slots and FAN kit

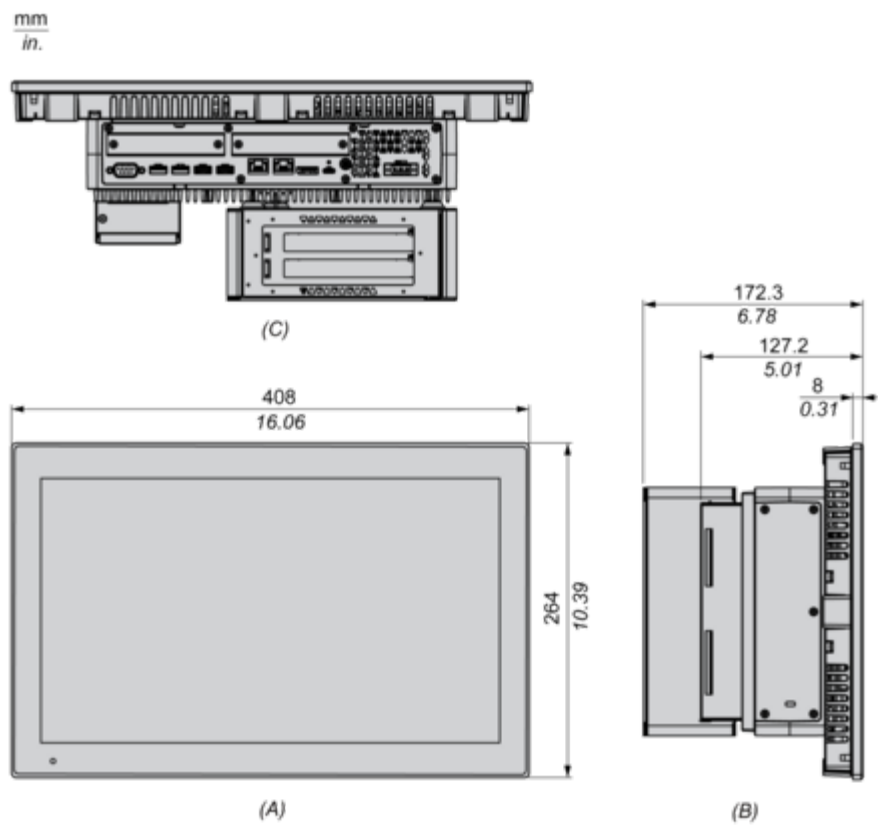

15-inch Wide Standard Model

External Dimensions

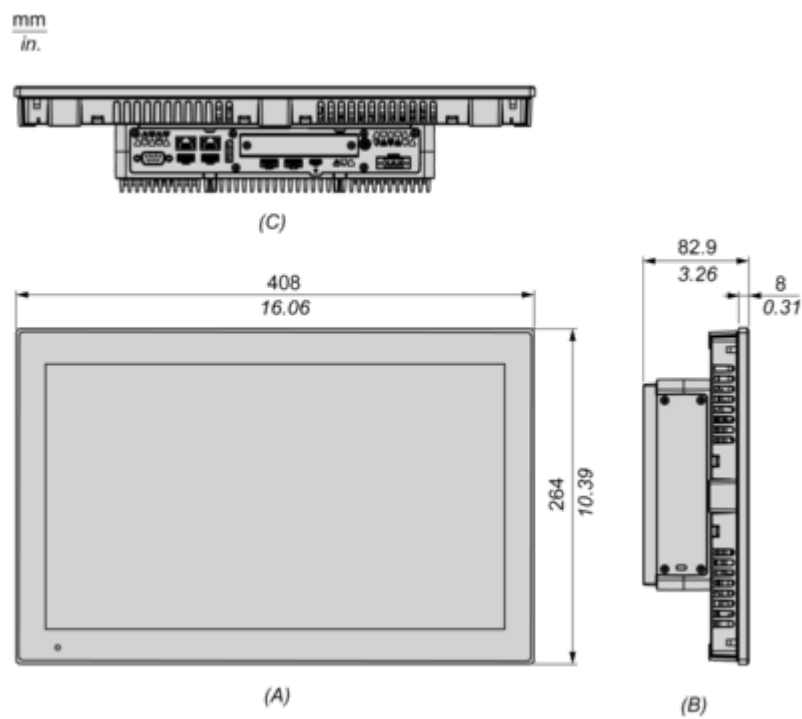


(C) : Bottom


Mounting and Clearance

Mounting

Panel Cut Dimensions

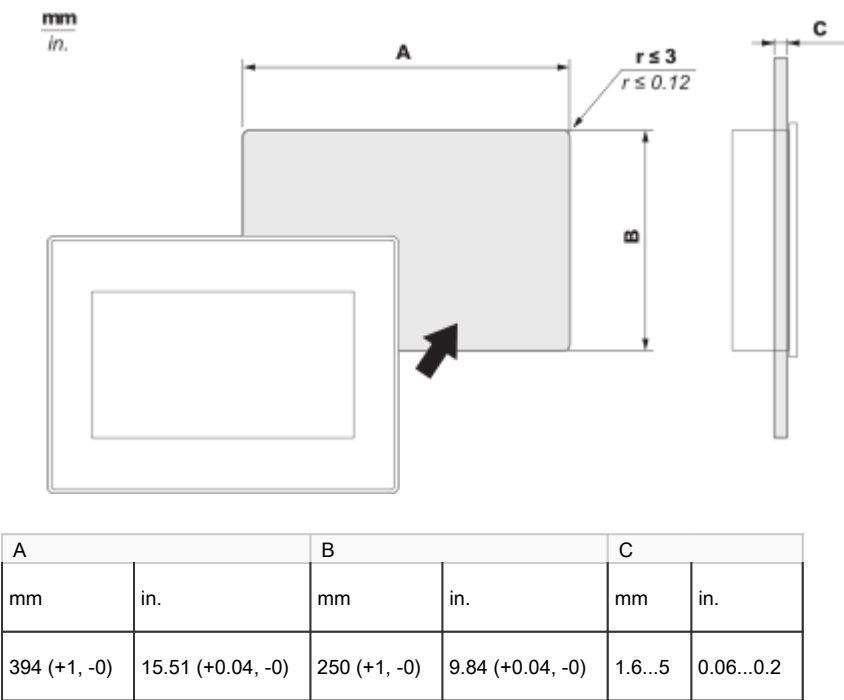


Mounting Angle

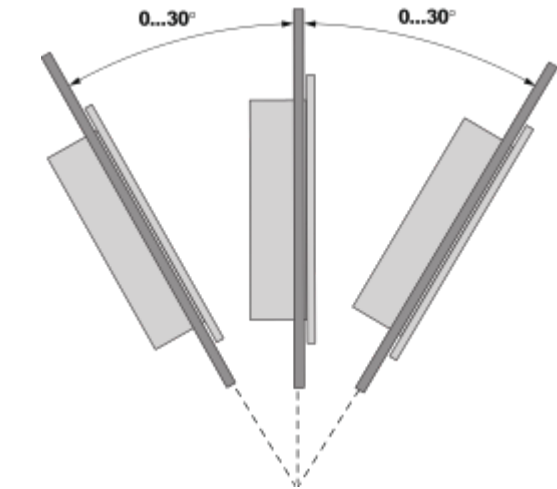

When installing this product in a slanted position, the product face should not incline more that 30°.

Clearance

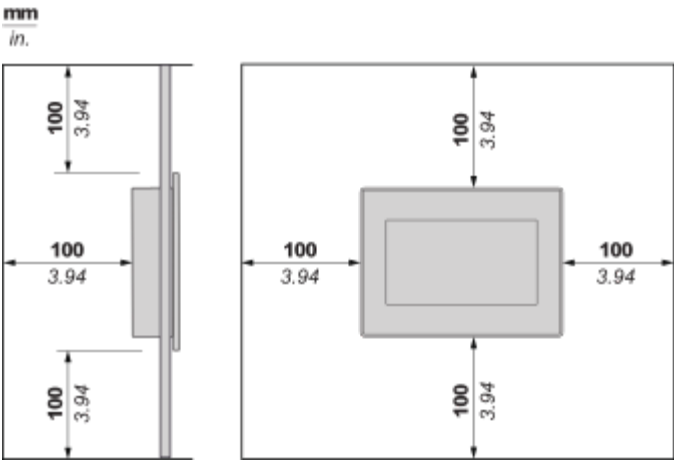

Technical Illustration

Dimensions

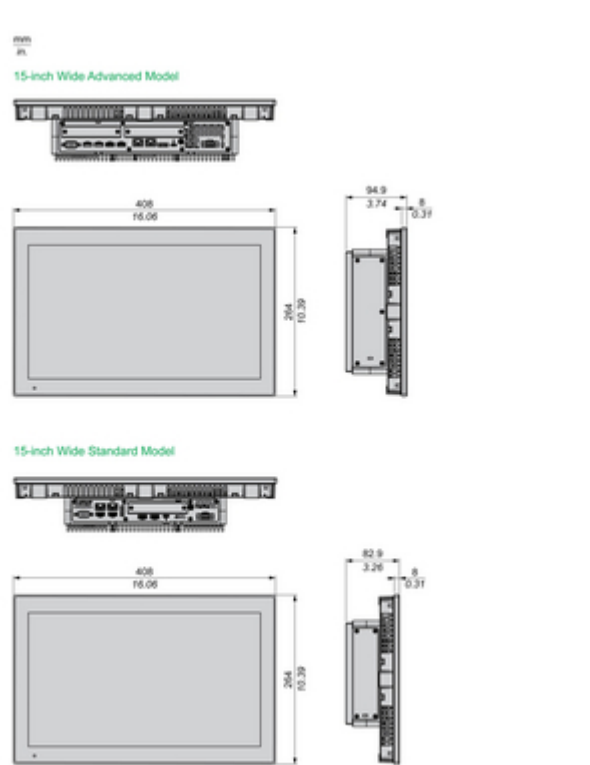


Image of product / Alternate images

Alternative

