

# Product data sheet

Specifications



## universal plug-in relay - Harmony RUM - 3 C/O - 60 V DC - 10 A - with LED

RUMC32ND

⚠ Discontinued on: Nov 1, 2020

⚠ Discontinued

### Main

Range of product	Harmony Relay
Series name	Universal
Product or component type	Plug-in relay
Device short name	RUM
[Uc] control circuit voltage	60 V DC
Contacts type and composition	3 C/O
status LED	With
Control type	Lockable test button
[Ithe] conventional enclosed thermal current	10 A at -40...55 °C

### Complementary

[Uimp] rated impulse withstand voltage	4 kV (1.2/50 μs)
Minimum switching capacity	170 mW at 10 mA, 17 V
Electrical durability	100000 cycles for resistive load
Operating time	20 ms at nominal voltage
Rated operational voltage limits	48...66 V DC
[Ui] rated insulation voltage	250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL
Reset time	20 ms at nominal voltage
Maximum switching voltage	250 V conforming to IEC
Drop-out voltage threshold	$\geq 0.1 U_c$ DC
[Ie] rated operational current	10 A at 277 V AC conforming to UL 10 A at 30 V DC conforming to UL 10 A at 277 V AC (same polarity) conforming to CSA 10 A at 30 V DC conforming to CSA 5 A at 250 V AC (NC) conforming to IEC 5 A at 28 V DC (NC) conforming to IEC 10 A at 250 V AC (NO) conforming to IEC 10 A at 28 V DC (NO) conforming to IEC
Average resistance	2790 Ohm at 20 °C +/- 15 %
Maximum switching capacity	2500 VA/280 W
Mechanical durability	5000000 cycles
Safety reliability data	B10d = 100000

List Price displayed is VAT EXCLUSIVE.

<b>Operating rate</b>	<= 18000 cycles/hour no-load <= 1200 cycles/hour under load
<b>Utilisation coefficient</b>	20 %
<b>Compatibility code</b>	RUM
<b>Dielectric strength</b>	1500 V AC between contacts with micro disconnection 2500 V AC between coil and contact with reinforced 2000 V AC between poles with basic
<b>Protection category</b>	RT I
<b>Pollution degree</b>	2
<b>Operating position</b>	Any position
<b>Test levels</b>	Level A group mounting
<b>Device presentation</b>	Complete product
<b>Contacts material</b>	AgNi
<b>Shape of pin</b>	Cylindrical
<b>Net weight</b>	0.086 kg

## Environment

<b>Ambient air temperature for operation</b>	-40...55 °C
<b>IP degree of protection</b>	IP40
<b>Standards</b>	CSA C22.2 No 14 EN/IEC 61810-1 UL 508
<b>Product certifications</b>	UL EAC CSA
<b>Ambient air temperature for storage</b>	-40...85 °C
<b>Vibration resistance</b>	3 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles in operation 4 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles not operating
<b>Shock resistance</b>	10 gn (duration = 11 ms) for in operation conforming to EN/IEC 60068-2-27 10 gn (duration = 11 ms) for not operating conforming to EN/IEC 60068-2-27

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.9 cm
<b>Package 1 Width</b>	3.55 cm
<b>Package 1 Length</b>	3.5 cm
<b>Package 1 Weight</b>	93 g

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better



#### Materials and Substances

EU RoHS Directive

[Compliant](#)

### Use Longer



#### Lifetime extension

Repair

No

### Use Again



#### Repack and remanufacture


End of life manual availability

No need of specific recycling operations

Dimensions Drawings

Dimensions

---

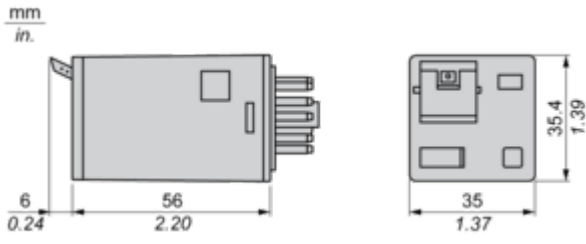

Connections and Schema


Wiring Diagram

---



Wiring Diagram

---

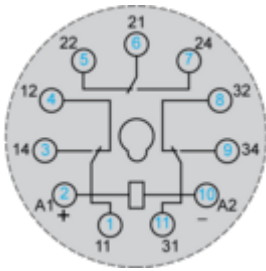

Symbols shown in blue correspond to Nema marking.


Performance Curves

Electrical Durability of Contacts

---

Durability (inductive load) = durability (resistive load) x reduction coefficient.


Resistive AC load

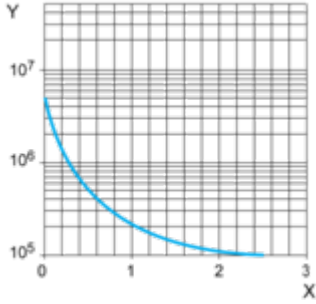

X Switching capacity (kVA)


Y Durability (Number of operating cycles)

Reduction coefficient for inductive AC load (depending on power factor cos φ)

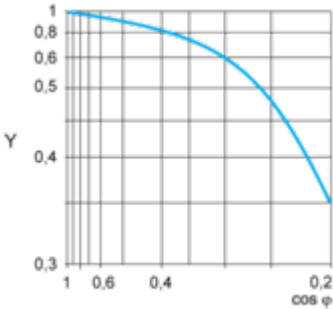

Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load

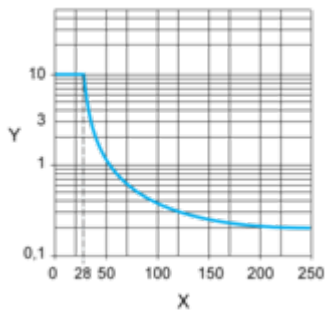

X Voltage DC

Y Current DC

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Technical Illustration

Dimensions

---

