



ASIsafe Basis Safety monitor 2 F-RO 2 enabling circuits IP20, with spring-type terminal removable terminals Safe output relay
 Response time maximum 40 ms Monitor type 2, Version 3 Can be used up to Category 4 (EN954-1) up to PL E (EN ISO 13849-1) up to SIL 3 (IEC 61508)

General technical data

design of the product		safety monitor
protocol is supported AS-Interface protocol		Yes
number of release circuits		2
type of electrical connection of the inputs and outputs		spring-loaded terminals
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		F

Ambient conditions

ambient temperature		
• during operation	°C	-20 ... +60
• during storage	°C	-30 ... +70
protection class IP		IP20

Mechanical data

width	mm	45
height	mm	108
depth	mm	120
fastening method		screws / DIN rail

Certificates/ approvals

General Product Approval	EMV
--------------------------	-----



EMV	Functional Safety	Maritime application	other	Environment
-----	-------------------	----------------------	-------	-------------



[Type Examination Certificate](#)



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
 Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1105-1BG04-0CA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1105-1BG04-0CA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1105-1BG04-0CA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1105-1BG04-0CA0&lang=en

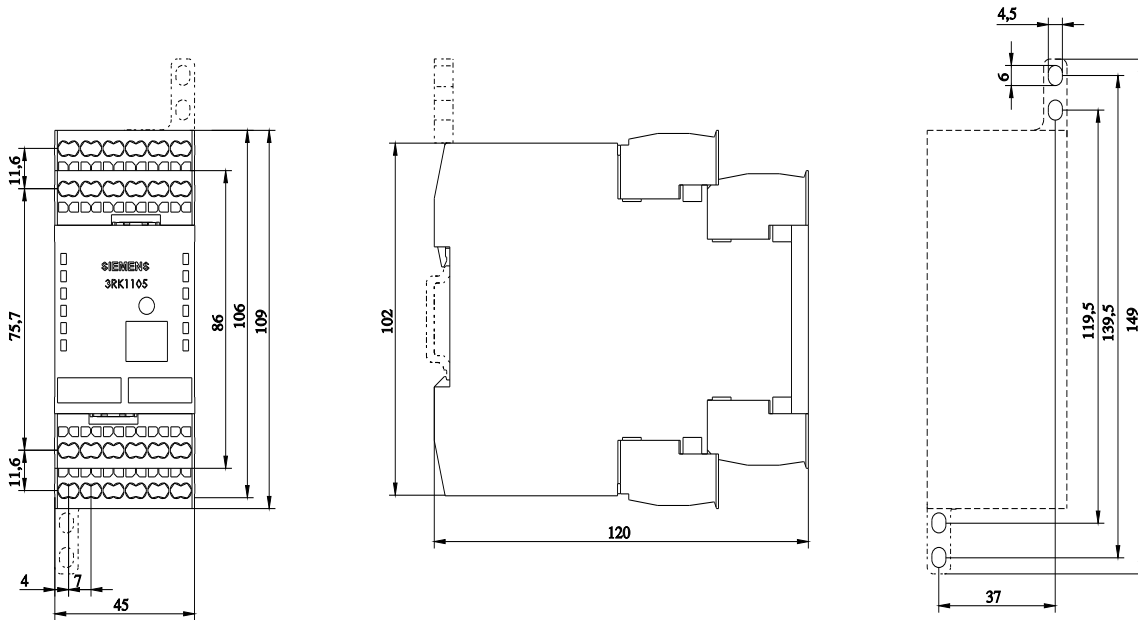

last modified:

4/1/2025