

Product data sheet

Specifications



Hermetically sealed plug-in relays, SE Relays, 3A, 4 CO, 6VAC

782XDXH10-6A

⚠ To be discontinued on: Jun 30, 2026

⚠ Discontinued

Main

Range of product	Harmony Electromechanical Relays
Series name	782H series
Product or component type	Plug-in relay
Contacts type and composition	4 C/O
Relay type	Hermetically sealed relay
status LED	Without
[Uc] control circuit voltage	6 V AC 50/60 Hz
cover options	Hermetically sealed

Complementary

class number	782H
Minimum switching current	100 mA 12 V AC 100 mA 12 V DC
Electrical durability	100000 cycles resistive IEC
Dielectric strength	1600 V AC between coil and contact 1600 V AC between poles
Control type	Without lockable test button
Coil resistance	10.5 Ohm
Average coil consumption	1.20 VA
Response time	20 ms
Associated fuse rating	6 A gG at 400 V coordination type 2 for power circuit
Short-circuit current	1 kA
Average pole impedence	2 mOhm
Maximum switching voltage	240 V AC
[Ie] rated operational current	3 A 120 V AC on resistive load) 3 A 240 V AC on resistive load) 3 A 30 V DC on resistive load)
Mechanical durability	10000000 cycles
Mounting support	Plug-in
Contacts material	Gold flashed fine silver
Shape of pin	Flat (faston type)
Width	0.90 in (22.75 mm)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Height	1.3 in (32.5 mm)
Depth	1.13 in (28.75 mm)
Net weight	1.6 oz (45 g)

Environment

Shock resistance	10 gn
Vibration resistance	6 gn 10...55 Hz)
Environmental characteristic	Hazardous location T5 40 °C
Product certifications	UL CSA CE
Ambient air temperature for storage	-76...185 °F (-60...85 °C)
Ambient air temperature for operation	-49...158 °F (-45...70 °C)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.132 in (2.875 cm)
Package 1 Width	0.896 in (2.275 cm)
Package 1 Length	1.132 in (2.875 cm)
Package 1 Weight	1.6 oz (45 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	100
Package 2 Height	7.09 in (18 cm)
Package 2 Width	10.2 in (25.8 cm)
Package 2 Length	13.2 in (33.5 cm)
Package 2 Weight	11.9 lb(US) (5.4 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

Circularity Profile


[End of Life Information](#)

Take-back

No

Dimensions Drawings


Dimensions

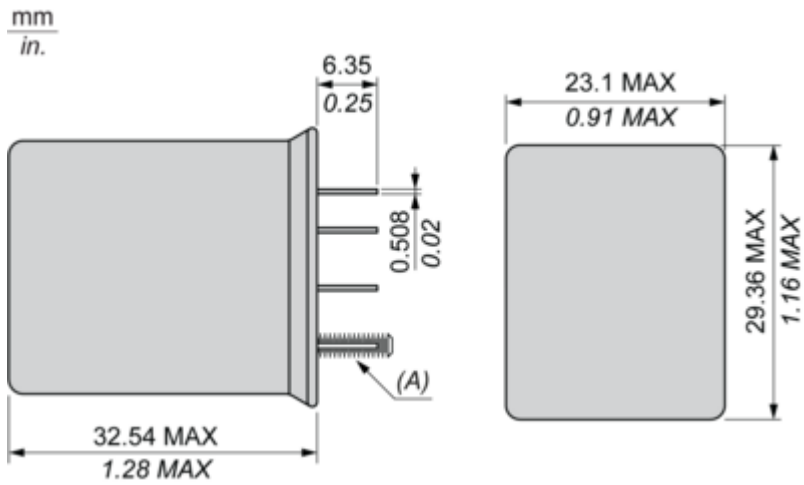

(A) : 0.312 (7.92) LONG #3-48 THREAD

Connections and Schema

Wiring

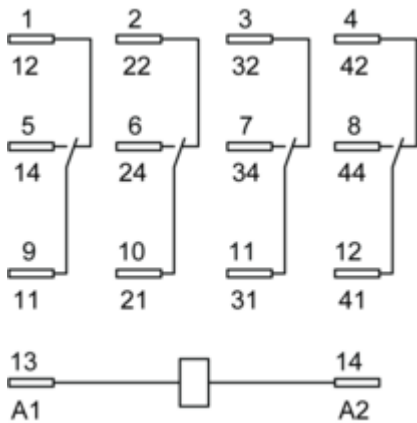

Technical Illustration

Dimensions

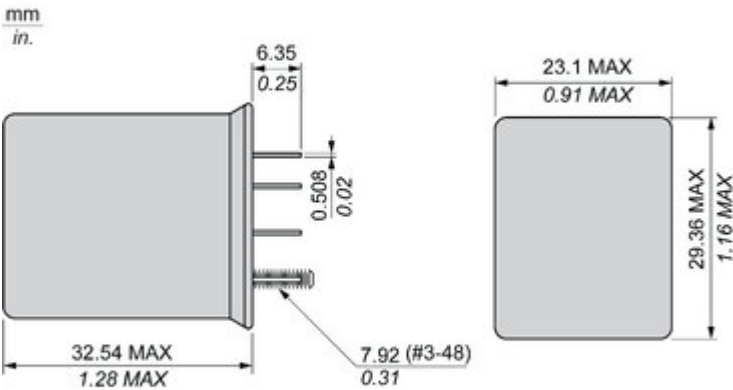


Image of product / Alternate images

Alternative





Image of product in real life situation

