



power contactor, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V DC, auxiliary contacts: 1 NC, spring-loaded terminal, size: S00, upright mounting position

|  |                             |
|--|-----------------------------|
| <b>product brand name</b>  | SIRIUS                      |
| <b>product designation</b>   | Power contactor             |
| <b>product type designation</b>  | 3RT2                        |
| <b>General technical data</b>  |                             |
| <b>size of contactor</b>   | S00                         |
| <b>product extension</b>   |                             |
| • function module for communication  | No                          |
| • auxiliary switch   | Yes                         |
| <b>power loss [W] for rated value of the current</b>   |                             |
| • at AC in hot operating state   | 1.5 W                       |
| • at AC in hot operating state per pole  | 0.5 W                       |
| • without load current share typical   | 4 W                         |
| <b>type of calculation of power loss current-dependent</b>   | quadratic                   |
| <b>insulation voltage</b>  |                             |
| • of main circuit with degree of pollution 3 rated value   | 690 V                       |
| • of auxiliary circuit with degree of pollution 3 rated value  | 690 V                       |
| <b>surge voltage resistance</b>  |                             |
| • of main circuit rated value  | 6 kV                        |
| • of auxiliary circuit rated value   | 6 kV                        |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                       |
| <b>shock resistance at rectangular impulse</b>   |                             |
| • at DC  | 7.3 g / 5 ms, 4.7 g / 10 ms |
| <b>shock resistance with sine pulse</b>  |                             |
| • at DC  | 11,4 g / 5 ms, 7,3g / 10 ms |
| <b>mechanical service life (operating cycles)</b>  |                             |
| • of contactor typical   | 30 000 000                  |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                   |
| • of the contactor with added auxiliary switch block typical   | 10 000 000                  |
| <b>reference code according to IEC 81346-2</b>   | Q                           |
| <b>Substance Prohibitance (day/month/year)</b>   | 10/01/2009                  |
| <b>Net Weight</b>  | 0.313 g                     |
| <b>Ambient conditions</b>  |                             |
| installation altitude at height above sea level maximum  | 2 000 m                     |
| <b>ambient temperature</b>   |                             |
| • during operation   | -25 ... +60 °C              |
| • during storage   | -55 ... +80 °C              |
| <b>relative humidity minimum</b>   | 10 %                        |
| <b>relative humidity at 55 °C according to IEC 60068-2-30</b>  | 95 %                        |

|  |                   |
|--|-------------------|
| maximum  |                   |
| <b>Main circuit</b>  |                   |
| number of poles for main current circuit                               | 3                 |
| number of NO contacts for main contacts                                | 3                 |
| number of NC contacts for main contacts                                | 0                 |
| <b>operating voltage</b>   |                   |
| • at AC-3 rated value maximum  | 690 V             |
| • at AC-3e rated value maximum   | 690 V             |
| <b>operational current</b>   |                   |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 22 A              |
| • at AC-1  |                   |
| — up to 690 V at ambient temperature 40 °C rated value                 | 22 A              |
| — up to 690 V at ambient temperature 60 °C rated value                 | 20 A              |
| • at AC-3  |                   |
| — at 400 V rated value   | 12 A              |
| — at 500 V rated value   | 9.2 A             |
| — at 690 V rated value   | 6.7 A             |
| • at AC-3e   |                   |
| — at 400 V rated value   | 12 A              |
| — at 500 V rated value   | 9.2 A             |
| — at 690 V rated value   | 6.7 A             |
| • at AC-4 at 400 V rated value   | 8.5 A             |
| • at AC-5a up to 690 V rated value                                     | 19.4 A            |
| • at AC-5b up to 400 V rated value                                     | 9.9 A             |
| • at AC-6a   |                   |
| — up to 230 V for current peak value n=20 rated value                  | 7.2 A             |
| — up to 400 V for current peak value n=20 rated value                  | 7.2 A             |
| — up to 500 V for current peak value n=20 rated value                  | 7.2 A             |
| — up to 690 V for current peak value n=20 rated value                  | 6.7 A             |
| • at AC-6a   |                   |
| — up to 230 V for current peak value n=30 rated value                  | 4.8 A             |
| — up to 400 V for current peak value n=30 rated value                  | 4.8 A             |
| — up to 500 V for current peak value n=30 rated value                  | 4.8 A             |
| — up to 690 V for current peak value n=30 rated value                  | 4.8 A             |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 4 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                   |
| • at 400 V rated value   | 4.1 A             |
| • at 690 V rated value   | 3.3 A             |
| <b>operational current</b>   |                   |
| • <b>at 1 current path at DC-1</b>                                     |                   |
| — at 24 V rated value  | 20 A              |
| — at 60 V rated value  | 20 A              |
| — at 110 V rated value   | 2.1 A             |
| — at 220 V rated value   | 0.8 A             |
| — at 440 V rated value   | 0.6 A             |
| — at 600 V rated value   | 0.6 A             |
| • <b>with 2 current paths in series at DC-1</b>                        |                   |
| — at 24 V rated value  | 20 A              |
| — at 60 V rated value  | 20 A              |
| — at 110 V rated value   | 12 A              |
| — at 220 V rated value   | 1.6 A             |
| — at 440 V rated value   | 0.8 A             |
| — at 600 V rated value   | 0.7 A             |
| • <b>with 3 current paths in series at DC-1</b>                        |                   |
| — at 24 V rated value  | 20 A              |

|   |   |
|---|---|
| — at 60 V rated value   | 20 A  |
| — at 110 V rated value  | 20 A  |
| — at 220 V rated value  | 20 A  |
| — at 440 V rated value  | 1.3 A   |
| — at 600 V rated value  | 1 A   |
| ● <b>at 1 current path at DC-3 at DC-5</b>                              |   |
| — at 24 V rated value   | 20 A  |
| — at 60 V rated value   | 0.5 A   |
| — at 110 V rated value  | 0.15 A  |
| ● <b>with 2 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 20 A  |
| — at 60 V rated value   | 5 A   |
| — at 110 V rated value  | 0.35 A  |
| ● <b>with 3 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 20 A  |
| — at 60 V rated value   | 20 A  |
| — at 110 V rated value  | 20 A  |
| — at 220 V rated value  | 1.5 A   |
| — at 440 V rated value  | 0.2 A   |
| — at 600 V rated value  | 0.2 A   |
| <b>operating power</b>  |   |
| ● at AC-2 at 400 V rated value  | 5.5 kW  |
| ● at AC-3   |   |
| — at 230 V rated value  | 3 kW  |
| — at 400 V rated value  | 5.5 kW  |
| — at 500 V rated value  | 5.5 kW  |
| — at 690 V rated value  | 5.5 kW  |
| ● at AC-3e  |   |
| — at 230 V rated value  | 3 kW  |
| — at 400 V rated value  | 5.5 kW  |
| — at 500 V rated value  | 5.5 kW  |
| — at 690 V rated value  | 5.5 kW  |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |   |
| ● at 400 V rated value  | 2 kW  |
| ● at 690 V rated value  | 2.5 kW  |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=20 rated value                   | 2.8 kVA   |
| ● up to 400 V for current peak value n=20 rated value                   | 4.9 kVA   |
| ● up to 500 V for current peak value n=20 rated value                   | 6.2 kVA   |
| ● up to 690 V for current peak value n=20 rated value                   | 8 kVA   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=30 rated value                   | 1.9 kVA   |
| ● up to 400 V for current peak value n=30 rated value                   | 3.3 kVA   |
| ● up to 500 V for current peak value n=30 rated value                   | 4.1 kVA   |
| ● up to 690 V for current peak value n=30 rated value                   | 5.7 kVA   |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |   |
| ● limited to 1 s switching at zero current maximum                      | 200 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 5 s switching at zero current maximum                      | 123 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 10 s switching at zero current maximum                     | 96 A; Use minimum cross-section acc. to AC-1 rated value  |
| ● limited to 30 s switching at zero current maximum                     | 74 A; Use minimum cross-section acc. to AC-1 rated value  |
| ● limited to 60 s switching at zero current maximum                     | 61 A; Use minimum cross-section acc. to AC-1 rated value  |
| <b>no-load switching frequency</b>                                      |   |
| ● at DC   | 10 000 1/h  |
| <b>operating frequency</b>  |   |
| ● at AC-1 maximum   | 1 000 1/h   |
| ● at AC-2 maximum   | 750 1/h   |
| ● at AC-3 maximum   | 750 1/h   |

- at AC-3e
  - maximum 750 1/h
- at AC-4 maximum 250 1/h

#### Control circuit/ Control

|   |                  |
|---|------------------|
| <b>type of voltage of the control supply voltage</b>                                  | DC               |
| <b>control supply voltage at DC rated value</b>                                       | 24 V             |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> |                  |
| ● initial value   | 0.8              |
| ● full-scale value  | 1.1              |
| <b>closing power of magnet coil at DC</b>   | 4 W              |
| <b>holding power of magnet coil at DC</b>   | 4 W              |
| <b>closing delay</b>  |                  |
| ● at DC   | 30 ... 100 ms    |
| <b>opening delay</b>  |                  |
| ● at DC   | 7 ... 13 ms      |
| <b>arcing time</b>  | 10 ... 15 ms     |
| <b>control version of the switch operating mechanism</b>                              | Standard A1 - A2 |

#### Auxiliary circuit

|  |   |
|--|---|
| number of NC contacts for auxiliary contacts instantaneous contact | 1   |
| number of NO contacts for auxiliary contacts instantaneous contact | 0   |
| operational current at AC-12 maximum                               | 10 A  |
| <b>operational current at AC-15</b>                                |   |
| ● at 230 V rated value   | 10 A  |
| ● at 400 V rated value   | 3 A   |
| ● at 500 V rated value   | 2 A   |
| ● at 690 V rated value   | 1 A   |
| <b>operational current at DC-12</b>                                |   |
| ● at 24 V rated value  | 10 A  |
| ● at 48 V rated value  | 6 A   |
| ● at 60 V rated value  | 6 A   |
| ● at 110 V rated value   | 3 A   |
| ● at 125 V rated value   | 2 A   |
| ● at 220 V rated value   | 1 A   |
| ● at 600 V rated value   | 0.15 A  |
| <b>operational current at DC-13</b>                                |   |
| ● at 24 V rated value  | 10 A  |
| ● at 48 V rated value  | 2 A   |
| ● at 60 V rated value  | 2 A   |
| ● at 110 V rated value   | 1 A   |
| ● at 125 V rated value   | 0.9 A   |
| ● at 220 V rated value   | 0.3 A   |
| ● at 600 V rated value   | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>                   | 1 faulty switching per 100 million (17 V, 1 mA) |

#### UL/CSA ratings

|   |             |
|---|-------------|
| <b>full-load current (FLA) for 3-phase AC motor</b>         |             |
| ● at 480 V rated value                                      | 11 A        |
| ● at 600 V rated value                                      | 11 A        |
| <b>yielded mechanical performance [hp]</b>                  |             |
| ● for single-phase AC motor                                 |             |
| — at 110/120 V rated value                                  | 0.5 hp      |
| — at 230 V rated value                                      | 2 hp        |
| ● for 3-phase AC motor                                      |             |
| — at 200/208 V rated value                                  | 3 hp        |
| — at 220/230 V rated value                                  | 3 hp        |
| — at 460/480 V rated value                                  | 8 hp        |
| — at 575/600 V rated value                                  | 10 hp       |
| <b>contact rating of auxiliary contacts according to UL</b> | A600 / Q600 |

| Short-circuit protection  |  |
|---|--|
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA   |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>  | gG: 50 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 35 A (415 V, 80 kA)<br>gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA)<br>gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions  |  |
| <b>mounting position</b>  | standing, on horizontal mounting surface   |
| fastening method side-by-side mounting  | Yes  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>   | 70 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 73 mm  |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm  |
| Connections/ Terminals  |  |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>   | spring-loaded terminals<br>spring-loaded terminals<br>Spring-type terminals<br>Spring-type terminals   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for main contacts</li> </ul>  | 2x (0.5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 12)                           |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>   | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>  | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>   | 2x (0.5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 12)  |

|  |           |
|--|-----------|
| AWG number as coded connectable conductor cross section for main contacts      | 20 ... 12 |
| AWG number as coded connectable conductor cross section for auxiliary contacts | 20 ... 12 |

**Safety related data**

|  |           |
|--|-----------|
| <b>product function</b>  |           |
| • mirror contact according to IEC 60947-4-1                          | Yes       |
| • positively driven operation according to IEC 60947-5-1             | No        |
| • suitable for safety function                                       | Yes       |
| suitability for use safety-related switching OFF                     | Yes       |
| <b>service life maximum</b>  | 20 a      |
| <b>test wear-related service life necessary</b>                      | Yes       |
| <b>proportion of dangerous failures</b>                              |           |
| • with low demand rate according to SN 31920                         | 40 %      |
| • with high demand rate according to SN 31920                        | 73 %      |
| <b>B10 value with high demand rate according to SN 31920</b>         | 1 000 000 |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 100 FIT   |

|  |     |
|--|-----|
| ISO 13849  |     |
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

|  |        |
|--|--------|
| IEC 61508  |        |
| <b>safety device type according to IEC 61508-2</b> | Type A |

|  |  |
|--|--|
| Electrical Safety  |  |
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

**Approvals Certificates**

|  |           |
|--|-----------|
| Environmental Product Declaration                          |           |
| • global warming potential [CO2 eq] / during manufacturing | 1.42 kg   |
| • global warming potential [CO2 eq] / during operation     | 152 kg    |
| • global warming potential [CO2 eq] / after end of life    | -0.305 kg |
| • global warming potential [CO2 eq] / total                | 153 kg    |

**Environment      General Product Approval**

[Environmental Confirmations](#)







**General Product Approval      EMV      Test Certificates**







[Type Test Certificates/Test Report](#)

**Test Certificates      Maritime application**


[Special Test Certificate](#)








**Maritime application      other      Railway**



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



[Special Test Certificate](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2017-2BB42-1AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-2BB42-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2017-2BB42-1AA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2017-2BB42-1AA0&lang=en)


Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2017-2BB42-1AA0>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

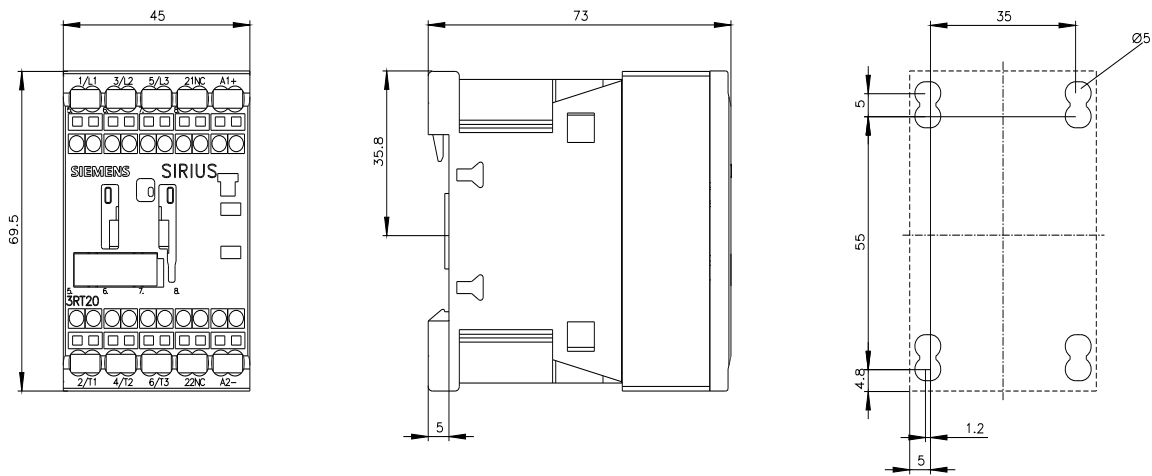

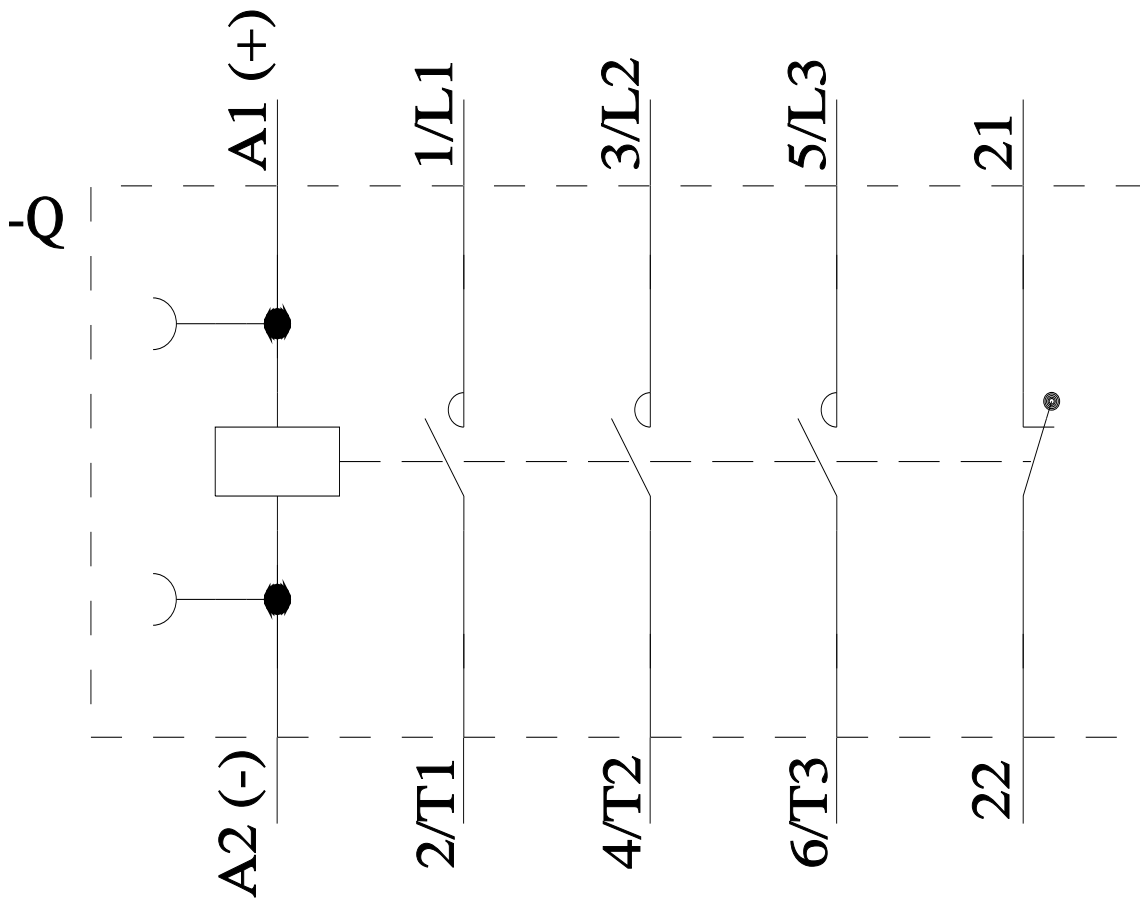

last modified:

4/4/2026 