



















Circuit breaker size S00 for motor protection, CLASS 10 A-release 2.8...4 A N release 52 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC Multi-unit packaging Pack = 12 units

| | |
|---|------------------------|
| product brand name | SIRIUS |
| product designation | Circuit breaker |
| design of the product | For motor protection |
| product type designation | 3RV2 |
| General technical data | |
| Product equipment of circuit breaker for motor protection complete unit with protection device | Yes |
| size of the circuit-breaker | S00 |
| size of contactor can be combined company-specific | S00, S0 |
| product function disconnecter functionality | Yes |
| product extension auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 7.25 W |
| • at AC in hot operating state per pole | 2.4 W |
| type of calculation of power loss current-dependent | quadratic |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation | |
| • in networks with ungrounded star point between main and auxiliary circuit | 400 V |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |
| protection class IP | |
| • on the front according to IEC 60529 | IP20 |
| • on the front | IP20 |
| • of the terminal | IP20 |
| shock resistance according to IEC 60068-2-27 | 25g / 11 ms |
| mechanical service life (operating cycles) | |
| • of the main contacts typical | 100 000 |
| • of auxiliary contacts typical | 100 000 |
| electrical endurance (operating cycles) typical | 100 000 |
| reference code according to IEC 81346-2 | Q |
| continuous current rated value | 4 A |
| Substance Prohibitance (day/month/year) | 10/01/2009 |
| SVHC substance name | Lead CAS-No. 7439-92-1 |
| Net Weight | 0.361 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -50 ... +80 °C |
| • during transport | -50 ... +80 °C |
| temperature compensation | -20 ... +60 °C |
| relative humidity during operation | 10 ... 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 2.8 ... 4 A |
| type of voltage for main current circuit | AC |
| operating voltage | |

| | |
|--|------------------------------------|
| <ul style="list-style-type: none"> ● rated value | 690 V |
| <ul style="list-style-type: none"> ● rated value | 20 ... 690 V |
| <ul style="list-style-type: none"> ● at AC-3 rated value maximum | 690 V |
| <ul style="list-style-type: none"> ● at AC-3e rated value maximum | 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current rated value | 4 A |
| operational current | |
| <ul style="list-style-type: none"> ● at AC-3 at 400 V rated value | 4 A |
| <ul style="list-style-type: none"> ● at AC-3e at 400 V rated value | 4 A |
| operating power | |
| <ul style="list-style-type: none"> ● at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value | 0.8 kW 1.5 kW 2.2 kW 3 kW |
| <ul style="list-style-type: none"> ● at AC-3e <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value | 0.8 kW 1.5 kW 2.2 kW 3 kW |
| operating frequency | |
| <ul style="list-style-type: none"> ● at AC-3 maximum | 15 1/h |
| <ul style="list-style-type: none"> ● at AC-3e maximum | 15 1/h |
| Auxiliary circuit | |
| design of the auxiliary switch | transverse |
| type of voltage for auxiliary and control circuit | AC/DC |
| number of NC contacts for auxiliary contacts | 1 |
| number of NO contacts for auxiliary contacts | 1 |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 | |
| <ul style="list-style-type: none"> ● at 24 V ● at 120 V ● at 125 V ● at 230 V | 2 A 0.5 A 0.5 A 0.5 A |
| operational current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> ● at 24 V ● at 60 V | 1 A 0.15 A |
| Protective and monitoring functions | |
| product function | |
| <ul style="list-style-type: none"> ● ground fault detection ● phase failure detection | No Yes |
| trip class | CLASS 10 |
| design of the overload release | thermal |
| maximum short-circuit current breaking capacity (Icu) | |
| <ul style="list-style-type: none"> ● at AC at 240 V rated value ● at AC at 400 V rated value ● at AC at 500 V rated value ● at AC at 690 V rated value | 100 kA 100 kA 100 kA 6 kA |
| operating short-circuit current breaking capacity (Ics) at AC | |
| <ul style="list-style-type: none"> ● at 240 V rated value ● at 400 V rated value ● at 500 V rated value ● at 690 V rated value | 100 kA 100 kA 100 kA 4 kA |
| response value current of instantaneous short-circuit trip unit | 52 A |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| <ul style="list-style-type: none"> ● at 480 V rated value ● at 600 V rated value | 4 A 4 A |
| yielded mechanical performance [hp] | |

| | |
|---|--|
| <ul style="list-style-type: none"> ● for single-phase AC motor <ul style="list-style-type: none"> — at 110/120 V rated value — at 230 V rated value ● for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | <p>0.13 hp</p> <p>0.33 hp</p> <p>0.8 hp</p> <p>0.75 hp</p> <p>2 hp</p> <p>3 hp</p> |
| contact rating of auxiliary contacts according to UL | C300 / R300 |
| UL File Number (CCN) | E47705 (NLRV, NLRV7) |
| Short-circuit protection | |
| product function short circuit protection | Yes |
| design of the short-circuit trip | magnetic |
| design of the fuse link <ul style="list-style-type: none"> ● for short-circuit protection of the auxiliary switch required | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current I _k < 400 A) |
| design of the fuse link for IT network for short-circuit protection of the main circuit <ul style="list-style-type: none"> ● at 400 V ● at 500 V ● at 690 V | <p>gL/gG 32 A</p> <p>gL/gG 32 A</p> <p>gL/gG 25 A</p> |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 02 ATEX F 001 |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD |
| Installation/ mounting/ dimensions | |
| mounting position | any |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| Mounting method of circuit breaker for Transformer protection, Generator protection and system protection optional standard bar mounting | Yes |
| height | 97 mm |
| width | 45 mm |
| depth | 97 mm |
| required spacing <ul style="list-style-type: none"> ● with side-by-side mounting <ul style="list-style-type: none"> — forwards — backwards — upwards — downwards — at the side ● for grounded parts <ul style="list-style-type: none"> — forwards — backwards — upwards — at the side — downwards ● for live parts <ul style="list-style-type: none"> — forwards — backwards — upwards — downwards — at the side ● for grounded parts at 400 V <ul style="list-style-type: none"> — downwards — upwards — at the side ● for live parts at 400 V <ul style="list-style-type: none"> — downwards — upwards — at the side ● for grounded parts at 500 V | <p>0 mm</p> <p>0 mm</p> <p>50 mm</p> <p>50 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>50 mm</p> <p>30 mm</p> <p>50 mm</p> <p>0 mm</p> <p>0 mm</p> <p>50 mm</p> <p>50 mm</p> <p>30 mm</p> <p>30 mm</p> <p>30 mm</p> <p>30 mm</p> <p>9 mm</p> <p>30 mm</p> <p>30 mm</p> <p>9 mm</p> |

| | |
|---|---|
| — downwards | 30 mm |
| — upwards | 30 mm |
| — at the side | 9 mm |
| • for live parts at 500 V | |
| — downwards | 30 mm |
| — upwards | 30 mm |
| — at the side | 9 mm |
| • for grounded parts at 690 V | |
| — downwards | 50 mm |
| — upwards | 50 mm |
| — backwards | 0 mm |
| — at the side | 30 mm |
| — forwards | 0 mm |
| • for live parts at 690 V | |
| — downwards | 50 mm |
| — upwards | 50 mm |
| — backwards | 0 mm |
| — at the side | 30 mm |
| — forwards | 0 mm |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | No |
| type of electrical connection | |
| • for main current circuit | screw-type terminals |
| • for auxiliary and control circuit | screw-type terminals |
| arrangement of electrical connectors for main current circuit | Top and bottom |
| type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid or stranded | 2x (0,75 ... 2,5 mm ²), 2x 4 mm ² |
| — finely stranded with core end processing | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| • for AWG cables for main contacts | 2x (18 ... 14), 2x 12 |
| connectable conductor cross-section for main contacts | |
| • solid or stranded | 0,75 ... 4 mm ² |
| • finely stranded with core end processing | 0,5 ... 2,5 mm ² |
| connectable conductor cross-section for auxiliary contacts | |
| • solid or stranded | 0,5 ... 2,5 mm ² |
| • finely stranded with core end processing | 0,5 ... 2,5 mm ² |
| type of connectable conductor cross-sections | |
| • for auxiliary contacts | |
| — solid or stranded | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| — finely stranded with core end processing | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| • for AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14) |
| AWG number as coded connectable conductor cross section for main contacts | 18 ... 12 |
| AWG number as coded connectable conductor cross section for auxiliary contacts | 20 ... 14 |
| tightening torque | |
| • for main contacts with screw-type terminals | 0,8 ... 1,2 N·m |
| • for auxiliary contacts with screw-type terminals | 0,8 ... 1,2 N·m |
| design of screwdriver shaft | Diameter 5 to 6 mm |
| size of the screwdriver tip | Pozidriv size 2 |
| design of the thread of the connection screw | |
| • for main contacts | M3 |
| • of the auxiliary and control contacts | M3 |
| Safety related data | |
| product function suitable for safety function | Yes |
| suitability for use | |
| • safety-related switching on | No |
| • safety-related switching OFF | Yes |

| | | |
|---|---|---|
| service life maximum | 10 a | |
| test wear-related service life necessary | Yes | |
| proportion of dangerous failures | | |
| • with low demand rate according to SN 31920 | 40 % | |
| • with high demand rate according to SN 31920 | 50 % | |
| B10 value with high demand rate according to SN 31920 | 5 000 | |
| failure rate [FIT] with low demand rate according to SN 31920 | 50 FIT | |
| ISO 13849 | | |
| device type according to ISO 13849-1 | 3 | |
| overdimensioning according to ISO 13849-2 necessary | Yes | |
| IEC 61508 | | |
| safety device type according to IEC 61508-2 | Type A | |
| T1 value | | |
| • for proof test interval or service life according to IEC 61508 | 10 a | |
| Electrical Safety | | |
| protection class IP on the front according to IEC 60529 | IP20 | |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front | |
| Display | | |
| display version for switching status | Handle | |
| Approvals Certificates | | |
| Environmental Product Declaration | | |
| • global warming potential [CO2 eq] / during manufacturing | 1.98 kg | |
| • global warming potential [CO2 eq] / during sales | 0.134 kg | |
| • global warming potential [CO2 eq] / during operation | 72.7 kg | |
| • global warming potential [CO2 eq] / after end of life | -0.116 kg | |
| • global warming potential [CO2 eq] / total | 74.698 kg | |
| Environment | General Product Approval | |
| Environmental Confirmations |      | |
| General Product Approval | For use in hazardous locations | |
|       | | |
| For use in hazardous locations | Test Certificates | Maritime application |
|  | Special Test Certificate | Type Test Certificates/Test Report |
| IECEX | |    |
| Maritime application | other | |
|    | Miscellaneous | Confirmation |
| | | Miscellaneous |
| other | Railway | |



Confirmation

Special Test Certificate

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1EA15-Z W97>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA15-Z W97>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1EA15-Z W97&lang=en

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1EA15-Z W97>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

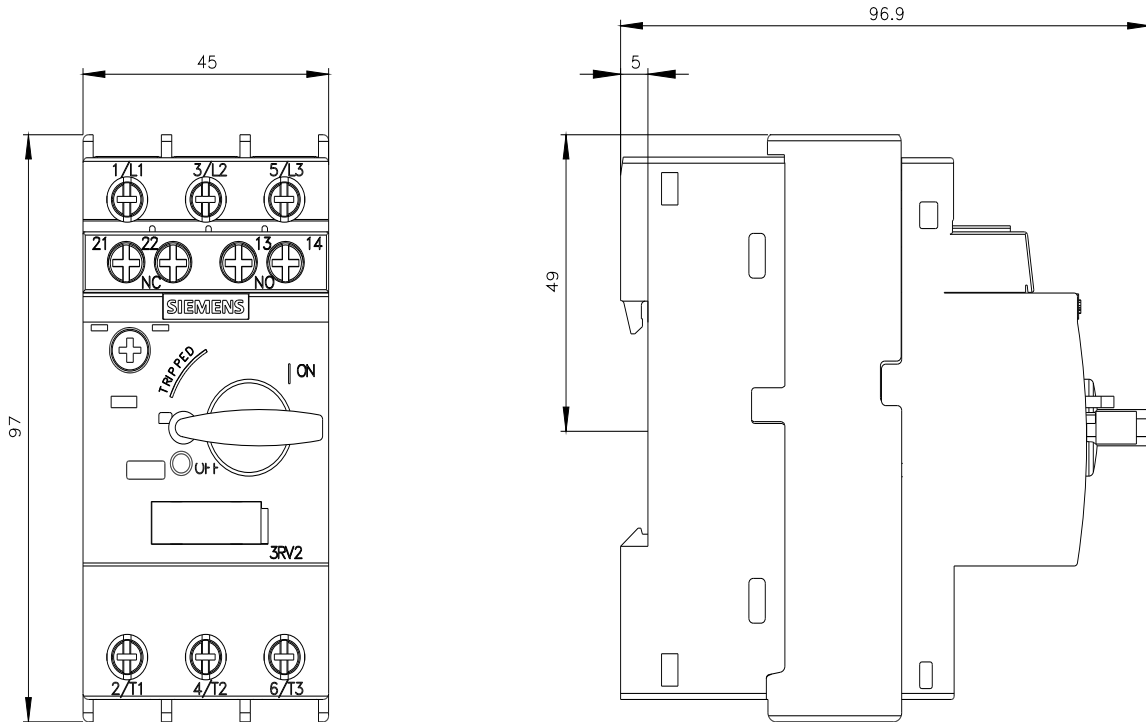



last modified:

5/5/2026