

# Product datasheet

Specifications



servo motor BSH, Lexium 05,  
2.12N.m, 6000rpm, 70mm, keyed  
shaft, Sincos single turn, with brake,  
IP50

BSH0702T11F2A

## Main

<b>Device short name</b>	BSH
<b>Product or component type</b>	Servo motor
<b>Maximum mechanical speed</b>	8000 rpm
<b>Continuous stall torque</b>	<p>2.2 N.m for LXM32.D30M2 at 10 A, 115 V, single phase</p> <p>2.12 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>2.12 N.m for LXM05BD17M2, 200...240 V, single phase</p> <p>2.12 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>2.2 N.m for LXM32.D18M2 at 6 A, 230 V, single phase</p> <p>2.12 N.m for LXM05AD17F1, 110...120 V, single phase</p> <p>2.12 N.m for LXM05AD28M2, 200...240 V, single phase</p> <p>2.12 N.m for LXM05BD17F1, 110...120 V, single phase</p> <p>2.12 N.m for LXM05BD28M2, 200...240 V, single phase</p> <p>2.12 N.m for LXM05CD17F1, 110...120 V, single phase</p> <p>2.12 N.m for LXM05CD28M2, 200...240 V, single phase</p> <p>2.12 N.m for LXM15LD17N4 at 6 A, 230 V, three phase</p> <p>2.12 N.m for LXM15LD21M3, 230 V, three phase</p> <p>2.12 N.m for LXM05AD42M3X, 200...240 V, three phase</p> <p>2.12 N.m for LXM05BD42M3X, 200...240 V, three phase</p> <p>2.12 N.m for LXM05CD42M3X, 200...240 V, three phase</p>
<b>Peak stall torque</b>	<p>6.1 N.m for LXM32.D30M2 at 10 A, 115 V, single phase</p> <p>7.2 N.m for LXM32.D18M2 at 6 A, 230 V, single phase</p> <p>4.14 N.m for LXM05AD17F1, 110...120 V, single phase</p> <p>4.14 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>4.14 N.m for LXM05BD17F1, 110...120 V, single phase</p> <p>4.14 N.m for LXM05BD17M2, 200...240 V, single phase</p> <p>4.14 N.m for LXM05CD17F1, 110...120 V, single phase</p> <p>4.14 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>6.8 N.m for LXM05AD28M2 at 6 A, 200...240 V, single phase</p> <p>6.8 N.m for LXM05BD28M2, 200...240 V, single phase</p> <p>6.8 N.m for LXM05CD28M2, 200...240 V, single phase</p> <p>4.47 N.m for LXM15LD17N4, 230 V, three phase</p> <p>5.45 N.m for LXM15LD21M3, 230 V, three phase</p> <p>6.8 N.m for LXM05AD42M3X, 200...240 V, three phase</p> <p>6.8 N.m for LXM05BD42M3X, 200...240 V, three phase</p> <p>6.8 N.m for LXM05CD42M3X, 200...240 V, three phase</p>
<b>Nominal output power</b>	<p>550 W for LXM32.D30M2 at 10 A, 115 V, single phase</p> <p>600 W for LXM05AD17M2, 200...240 V, single phase</p> <p>600 W for LXM05BD17M2 at 6 A, 200...240 V, single phase</p> <p>600 W for LXM05CD17M2, 200...240 V, single phase</p> <p>570 W for LXM05AD17F1, 110...120 V, single phase</p> <p>570 W for LXM05BD17F1, 110...120 V, single phase</p> <p>570 W for LXM05CD17F1, 110...120 V, single phase</p> <p>600 W for LXM05AD28M2, 200...240 V, single phase</p> <p>600 W for LXM05BD28M2, 200...240 V, single phase</p> <p>600 W for LXM05CD28M2, 200...240 V, single phase</p> <p>950 W for LXM32.D18M2 at 6 A, 230 V, single phase</p> <p>1000 W for LXM15LD17N4, 230 V, three phase</p> <p>1000 W for LXM15LD21M3, 230 V, three phase</p> <p>600 W for LXM05AD42M3X, 200...240 V, three phase</p> <p>600 W for LXM05BD42M3X, 200...240 V, three phase</p> <p>600 W for LXM05CD42M3X, 200...240 V, three phase</p>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Nominal torque</b>	<p>2.07 N.m for LXM32.D30M2 at 10 A, 115 V, single phase</p> <p>1.9 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>1.9 N.m for LXM05BD17M2 at 6 A, 200...240 V, single phase</p> <p>1.9 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>1.83 N.m for LXM05AD17F1, 110...120 V, single phase</p> <p>1.83 N.m for LXM05BD17F1, 110...120 V, single phase</p> <p>1.83 N.m for LXM05CD17F1, 110...120 V, single phase</p> <p>1.9 N.m for LXM05AD28M2, 200...240 V, single phase</p> <p>1.9 N.m for LXM05BD28M2, 200...240 V, single phase</p> <p>1.9 N.m for LXM05CD28M2, 200...240 V, single phase</p> <p>1.8 N.m for LXM32.D18M2 at 6 A, 230 V, single phase</p> <p>1.66 N.m for LXM15LD17N4, 230 V, three phase</p> <p>1.66 N.m for LXM15LD21M3, 230 V, three phase</p> <p>1.9 N.m for LXM05AD42M3X, 200...240 V, three phase</p> <p>1.9 N.m for LXM05BD42M3X, 200...240 V, three phase</p> <p>1.9 N.m for LXM05CD42M3X, 200...240 V, three phase</p>
<b>Nominal speed</b>	<p>2500 rpm for LXM32.D30M2 at 10 A, 115 V, single phase</p> <p>3000 rpm for LXM05AD17F1, 110...120 V, single phase</p> <p>3000 rpm for LXM05BD17F1 at 6 A, 110...120 V, single phase</p> <p>3000 rpm for LXM05CD17F1, 110...120 V, single phase</p> <p>3000 rpm for LXM05AD17M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05BD17M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05CD17M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05AD28M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05BD28M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05CD28M2, 200...240 V, single phase</p> <p>5000 rpm for LXM32.D18M2 at 6 A, 230 V, single phase</p> <p>3000 rpm for LXM05AD42M3X, 200...240 V, three phase</p> <p>3000 rpm for LXM05BD42M3X, 200...240 V, three phase</p> <p>3000 rpm for LXM05CD42M3X, 200...240 V, three phase</p> <p>6000 rpm for LXM15LD17N4, 230 V, three phase</p> <p>6000 rpm for LXM15LD21M3, 230 V, three phase</p>
<b>Product compatibility</b>	<p>LXM05AD17F1 at 110...120 V single phase</p> <p>LXM05AD17M2 at 200...240 V single phase</p> <p>LXM05AD28M2 at 200...240 V single phase</p> <p>LXM05BD17F1 at 110...120 V single phase</p> <p>LXM05BD17M2 at 200...240 V single phase</p> <p>LXM05BD28M2 at 200...240 V single phase</p> <p>LXM05CD17F1 at 110...120 V single phase</p> <p>LXM05CD17M2 at 200...240 V single phase</p> <p>LXM05CD28M2 at 200...240 V single phase</p> <p>LXM32.D30M2 at 115 V single phase</p> <p>LXM32.D18M2 at 230 V single phase</p> <p>LXM15LD21M3 at 230 V three phase</p> <p>LXM05AD42M3X at 200...240 V three phase</p> <p>LXM05BD42M3X at 200...240 V three phase</p> <p>LXM05CD42M3X at 200...240 V three phase</p> <p>LXM15LD17N4 at 230 V three phase</p>
<b>Shaft end</b>	Keyed
<b>IP degree of protection</b>	IP50 standard
<b>Speed feedback resolution</b>	131072 points/turn
<b>Holding brake</b>	With
<b>Mounting support</b>	International standard flange
<b>Electrical connection</b>	Rotatable right-angled connectors

## Complementary

<b>Range compatibility</b>	<p>Lexium 05</p> <p>Lexium 15</p> <p>Lexium 32</p>
<b>supply voltage max</b>	480 V
<b>Network number of phases</b>	Three phase
<b>Continuous stall current</b>	4.9 A
<b>maximum continuous power</b>	1.51 W

<b>Maximum current Irms</b>	20.6 A for LXM15LD21M3 20.6 A for LXM15LD17N4 19.9 A for LXM05AD17F1 19.9 A for LXM05AD17M2 19.9 A for LXM05AD28M2 19.9 A for LXM05AD42M3X 19.9 A for LXM05BD17F1 19.9 A for LXM05BD17M2 19.9 A for LXM05BD28M2 19.9 A for LXM05BD42M3X 19.9 A for LXM05CD17F1 19.9 A for LXM05CD17M2 19.9 A for LXM05CD28M2 19.9 A for LXM05CD42M3X 15 A for LXM32.D30M2 18 A for LXM32.D18M2
<b>Maximum permanent current</b>	19.9 A
<b>Switching frequency</b>	8 kHz
<b>Second shaft</b>	Without second shaft end
<b>Shaft diameter</b>	11 mm
<b>Shaft length</b>	23 mm
<b>Key width</b>	18 mm
<b>Feedback type</b>	Single turn SinCos Hiperface
<b>Holding torque</b>	2 N.m holding brake
<b>Motor flange size</b>	70 mm
<b>Number of motor stacks</b>	2
<b>Torque constant</b>	0.45 N.m/A at 120 °C
<b>Back emf constant</b>	28 V/krpm at 120 °C
<b>Number of motor poles</b>	3.0
<b>Rotor inertia</b>	0.482 kg.cm <sup>2</sup>
<b>Stator resistance</b>	1.5 Ohm at 20 °C
<b>Stator inductance</b>	3.75 mH at 20 °C
<b>Stator electrical time constant</b>	4.47 ms at 20 °C
<b>Maximum radial force Fr</b>	390 N at 6000 rpm 410 N at 5000 rpm 450 N at 4000 rpm 490 N at 3000 rpm 560 N at 2000 rpm 710 N at 1000 rpm
<b>Maximum axial force Fa</b>	0.2 x Fr
<b>Brake pull-in power</b>	10 W
<b>Type of cooling</b>	Natural convection
<b>Length</b>	212.5 mm
<b>Centring collar diameter</b>	60 mm
<b>Centring collar depth</b>	2.5 mm
<b>Number of mounting holes</b>	4
<b>Mounting holes diameter</b>	5.5 mm
<b>Circle diameter of the mounting holes</b>	82 mm
<b>Net weight</b>	3 kg
<b>Sizing reference</b>	BSH0702T

Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C
Output current 3s peak	19.9 A
Inertia	0.11 kg.cm <sup>2</sup> of brake 0.41 kg.cm <sup>2</sup> of motor

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.3 cm
Package 1 Width	12.8 cm
Package 1 Length	37.7 cm
Package 1 Weight	3.25 kg

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	1 105 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	14 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.4 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 090 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	8c11b0c9-e501-4810-83eb-05fc6605ede4
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>
PVC free	Yes

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again




### Repack and remanufacture

End of life manual availability	No need of specific recycling operations
Take-back	Nej

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

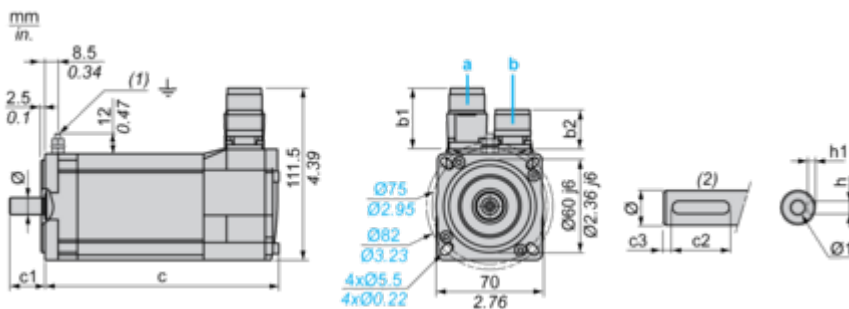

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder

(1) M4 screw

(2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2									
39.5	25.5	39.5	39.5	187	213	23	18	2.5	4 N9	2.5 <sup>+0.1</sup> <sub>0</sub>	11 k6	M4 x 10

Dimensions in in.

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2									
1.55	1.00	1.55	1.55	7.36	8.38	0.90	0.70	0.09	0.16 N9	0.01 <sup>+0.004</sup> <sub>0</sub>	0.43 k6	M4 x 0.39


Performance Curves

115 V Single-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive

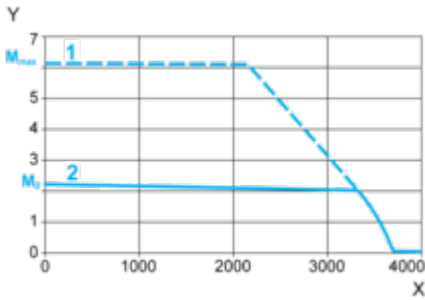

X Speed in rpm

Y Torque in Nm

1 Peak torque


2 Continuous torque

230 V Single-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive

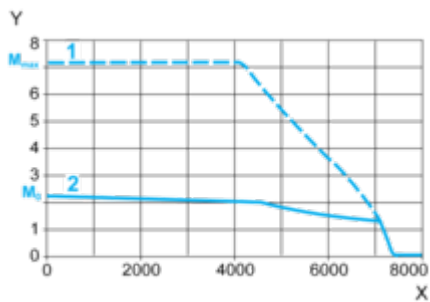

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque