

Product datasheet

Specifications



plug-in electromechanical relay - 12.5 mm - 48 V DC - 1 CO

ABR7S33E

⚠ Discontinued on: 12 May 2023

⚠ Discontinued

Main

Range of product	Advantys Telefast ABE7
Product or component type	Plug-in electromechanical relay
Control circuit type	DC
Quantity per set	Set of 4

Complementary

Width pitch dimension	12 mm
Product compatibility	ABE7P16T330 ABE7R16T330 ABE7P16T330E ABE7P16T332 ABE7P08T330 ABE7P16T318E ABE7R16T332 ABE7P16T334 ABE7P16T318 ABE7P08T330E
[Uc] control circuit voltage	48 V
[Ith] conventional free air thermal current	8 A
Threshold tripping voltage	16.8 V at 40 °C
Drop-out voltage	3.6 V at 20 °C
Drop-out current	3.5 mA at 20 °C
Maximum power dissipation per pole	0.6 W
Associated fuse rating	1 A
Maximum switching voltage	130 V DC conforming to IEC 60947-5-1 264 V AC 50/60 Hz conforming to IEC 60947-5-1
Electrical durability	500000 cycles, maximum switching current: 1400 mA at 24 V DC-13 10 ms 500000 cycles, maximum switching current: 1700 mA at 230 V AC-15 500000 cycles, maximum switching current: 3000 mA at 230 V AC-12 500000 cycles, maximum switching current: 3000 mA at 24 V DC-12
Minimum switching current	100 mA at >= 5 V
electrical reliability	1e-008
Operating time	<= 13 ms coil de-energisation and NO opening <= 13 ms coil energisation and NO closing
Contact bounce time	<= 1.6 ms 1 NO <= 5.5 ms 1 NC
Operating rate in Hz	5 Hz no load 0.5 Hz at Ie

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Mechanical durability	20000000 cycles
[Uimp] rated impulse withstand voltage	2.5 kV conforming to IEC 60947-1
Net weight	0.017 kg

Environment

Max immunity to microbreaks	5 ms
Dielectric strength	2000 V conforming to IEC 60947-1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.4 cm
Package 1 Width	4.5 cm
Package 1 Length	6 cm
Package 1 Weight	19 g
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Height	3.4 cm
Package 2 Width	4.5 cm
Package 2 Length	6 cm
Package 2 Weight	84 g
Unit Type of Package 3	S01
Number of Units in Package 3	288
Package 3 Height	15 cm
Package 3 Width	15 cm
Package 3 Length	40 cm
Package 3 Weight	6.284 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
EU RoHS Directive	Compliant
PVC free	Yes

Use Longer

Lifetime extension	
Repair	No


Use Again

Repack and remanufacture	
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Performance Curves

Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1

DC Loads

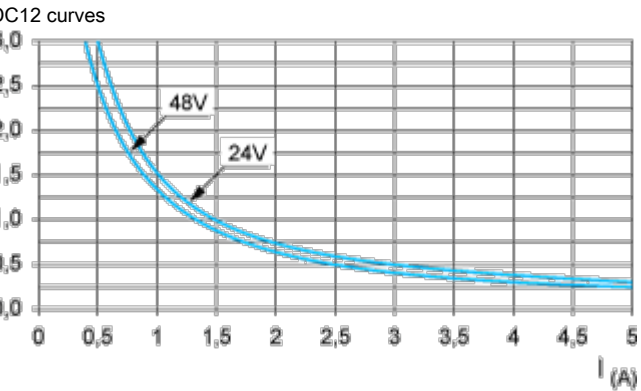


DC12 control of resistive loads and of solid state loads isolated by optocoupler, $I/R \leq 1$ ms.

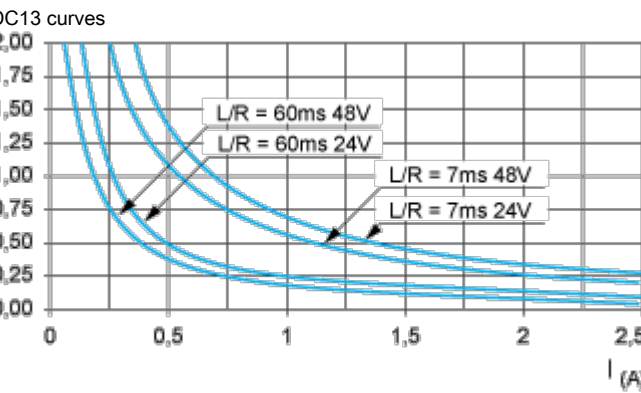

DC13


Switching electromagnets, $L/R \leq 2 \times (U_e \times I_e)$ in ms, U_e : rated operational voltage, I_e : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)

AC Loads

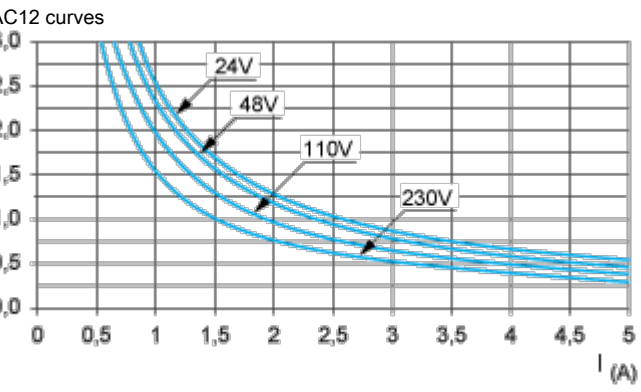


AC12 control of resistive loads and of solid state loads isolated by optocoupler, $\cos \phi \geq 0.9$.

AC14 curves

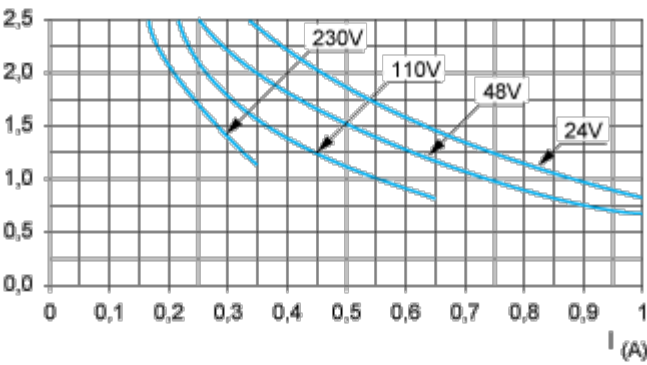

AC14 control of small electromagnetic loads ≤ 72 VA, make: $\cos \phi = 0.3$, break: $\cos \phi = 0.3$.

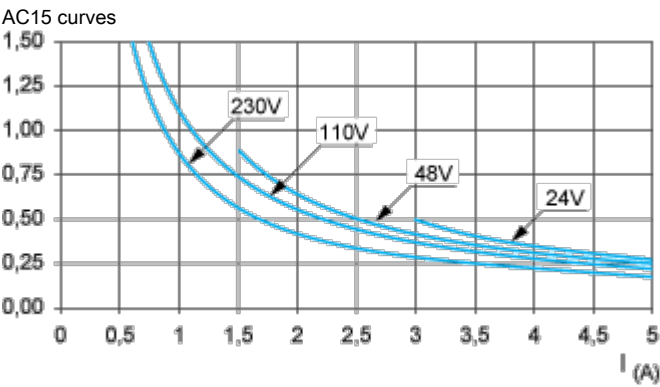

AC15 control of electromagnetic loads > 72 VA, make: $\cos \phi = 0.7$, break: $\cos \phi = 0.4$.