

Product data sheet

Specifications



Unity Hot Standby processor with single mode Ethernet- 3072 kB - 266 MHz -coated

140CPU67261C

! Discontinued - Service only

! Discontinued on: 8 Feb 2021

! To be end-of-service on: 31 Dec 2026

Main

Range of product	Modicon Quantum automation platform
Product or component type	Unity processor

Complementary

Mode of transmission	Single mode
Clock frequency	266 MHz
Number of slots	10 16 4 2 6
Number of racks	2 - local rack(s)
Number of distributed I/O station	63 station(s) - 1 rack(s) - 3 Modbus Plus network(s)
Number of remote I/O station	31 - 2 rack(s) per S908 remote I/O 31 - 2 rack(s) per ethernet Quantum remote I/O 31 - 2 rack(s) per ethernet X80 remote I/O
Discrete I/O number	31744 inputs, 31744 outputs - remote 8000 inputs, 8000 outputs - distributed - per network Modbus Plus Unlimited (31 drops of 28 slots max) - ethernet remote I/O 0 - local - forbidden in Hot Standby application
Analogue I/O number	500 inputs, 500 outputs - distributed - per network Modbus Plus Unlimited (31 drops of 28 slots max) - ethernet remote I/O 1984 inputs, 1984 outputs - remote 0 - local - forbidden in Hot Standby application
Application specific I/O	Accurate time stamping Counter Serial link High-speed interrupt inputs
Communication service	Ethernet router
Number of optional modules	6 (Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)
Maximum number of connections	1 USB 2 AS-Interface - distributed 4 AS-Interface - remote 6 Ethernet TCP/IP - local 6 Modbus Plus - local 6 Profibus DP - local 1 Modbus (RS232/485 Modbus/ASCII)
Integrated connection type	1 Modbus Plus with 1 Modbus with 1 USB with 1 optic fibre with Hot Standby

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Checks	Hot standby Process control
Memory description	Expandable 8 MB - file storage with PCMCIA card Internal RAM 11264 kB - 1536 kB for data
Switch function	Key switch memory port on/off
Application structure	1 periodic fast task - forbidden in Hot Standby application 128 I/O interrupt tasks - forbidden in Hot Standby application 128 interrupt tasks - forbidden in Hot Standby application 32 timer interrupt tasks - forbidden in Hot Standby application 4 auxiliary tasks - forbidden in Hot Standby application 1 cyclic/periodic master task -
Number of instructions per ms	10.28 Kinst/ms 100 % Boolean 10.07 Kinst/ms 65 % Boolean and 35 % numerical
System overhead	0.2 ms for fast task 1 ms for master task
Bus current requirement	2760 mA
Local signalling	1 LED (green) for Ethernet activity (COM) 1 LED (red) for Ethernet collision
Electrical connection	1 female connector, connector type: SUB-D 9 for connecting to the Modbus Plus network 1 connector, connector type: RJ45 for connecting Modbus bus 1 connector, connector type: LC (single mode fiber optic) for interconnecting primary and secondary PLCs up to 16 km

Environment

Protective treatment	Conformal coating Humiseal 1A33
Product certifications	ATEX zone 2 GOST IEC-Ex CE Misc (Marine) CSA UL
Standards	HazLoc

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.0 cm
Package 1 Width	18.5 cm
Package 1 Length	32.5 cm
Package 1 Weight	1.472 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
EU RoHS Directive	Compliant


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

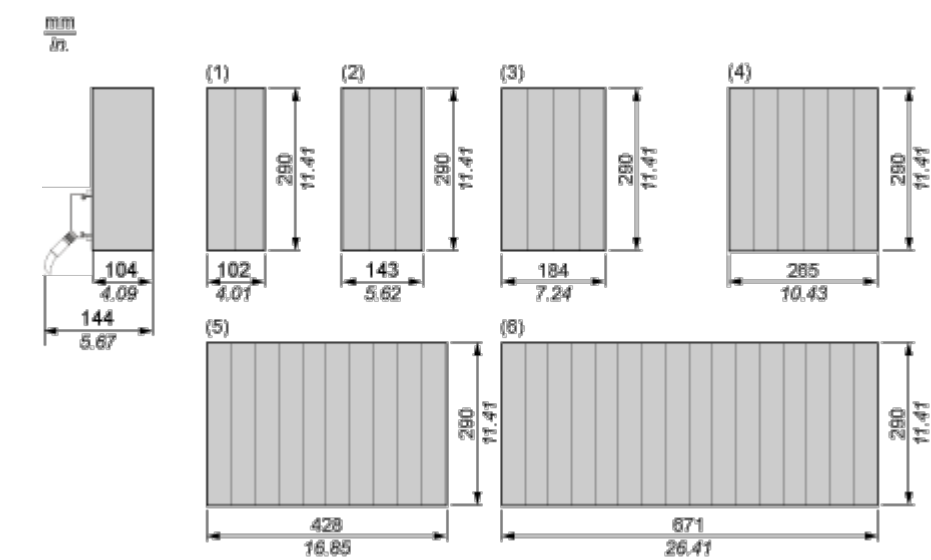

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots