

Product datasheet

Specifications



switch disconnecter EasyPact Vigi CVS250NA, 3 poles, 250 A, AC22A, AC23A

LV525427

⚠ Discontinued on: 28 Aug 2022

⚠ End-of-service on: 28 Aug 2023

⚠ Discontinued

Main

Range of product	EasyPact CVS100...250
Range	EasyPact
Product name	EasyPact CVS
Device short name	Vigi CVS250NA
Product or component type	Earth leakage switch disconnecter
Device application	Distribution
Poles description	3P
Network type	AC
[Ie] rated operational current	AC-22A: 250 A AC 50/60 Hz 220/240 V AC-22A: 250 A AC 50/60 Hz 380/415 V AC-22A: 250 A AC 50/60 Hz 440 V AC-23A: 250 A AC 50/60 Hz 220/240 V AC-23A: 250 A AC 50/60 Hz 380/415 V AC-23A: 250 A AC 50/60 Hz 440 V
[Ith] conventional free air thermal current	250 A at 50 °C
[Icm] rated short-circuit making capacity	75 kA with upstream protection circuit breaker 4.9 kA switch-disconnector alone
Breaking capacity code	NA
Suitability for isolation	Yes conforming to EN 60947-3 Yes conforming to IEC 60947-3
Utilisation category	AC-22A AC-23A
Earth-leakage add-on module name	MH
Earth-leakage protection	With

Complementary

Network frequency	50/60 Hz
Control type	Toggle
Mounting mode	Fixed
Mounting support	Backplate
Upside connection	Front
Downside connection	Front
[Icw] rated short-time withstand current	1.35 kA during 20 s conforming to IEC 60947-3 3.5 kA during 1 s conforming to IEC 60947-3 3.5 kA during 3 s conforming to IEC 60947-3

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Contact position indicator	Yes
Visible break	No
Residual earth-leakage sensitivity adjustment type	Adjustable 5 settings
[IΔn] residual earth-leakage sensitive adjustment	1 A 3 A 0.03 A 0.3 A 10 A
Residual earth-leakage time delay adjustment type	Adjustable 4 settings
[Δt] residual earth-leakage time delay adjustment	310 ms 60 ms 0 ms 150 ms
Mechanical durability	20000 cycles conforming to IEC 60947-3
Electrical durability	AC-22A: 6500 cycles 415 V AC 50/60 Hz In conforming to IEC 60947-3 AC-23A: 6500 cycles 415 V AC 50/60 Hz In conforming to IEC 60947-3
Connection pitch	35 mm
Height	236 mm
Width	105 mm
Depth	86 mm

Environment

Standards	EN 60947-3 IEC 60947-3
Product certifications	IEC GOST
Electrical shock protection class	Class II
Pollution degree	3 conforming to IEC 60529
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-50...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9 cm
Package 1 Width	10.2 cm
Package 1 Length	15.8 cm
Package 1 Weight	2.3 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
EU RoHS Directive	Compliant


Use Longer

Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Dimensions Drawings

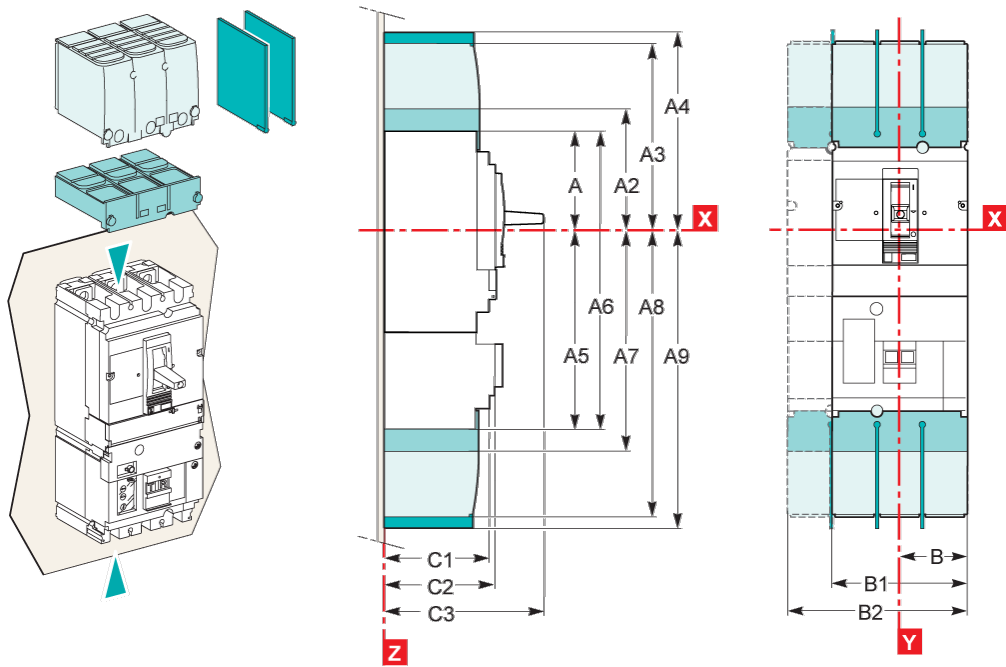

Type	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	B	B1	B2	C1	C2	C3	E1
CVS100/160/250	80.5	161	94	145	178.5	155.5	236	169	220	253.5	52.5	105	140	81	86	111 ⁽²⁾	62.5
CVS400/630	127.5	255	142.5	200	237	227.5	355	242.5	300	337	70	140	185	95.5	110	168	100
Type	E2	E3	E4	E5	E6	E7	E8	F1	F2	F3	G1	G2	G3	G4	G5	ØT	U
CVS100/160/250	125	70	140	137.5	200	145	215	35	17.5	70	95	75	13.5	23	17.5	24	y 32
CVS400/630	200	113.5	227	200	300	213.5	327	45	22.5	90	-	-	-	-	-	32	y 35

(2) C3=126mm for EasyPact CVS250B/F.

Assembly

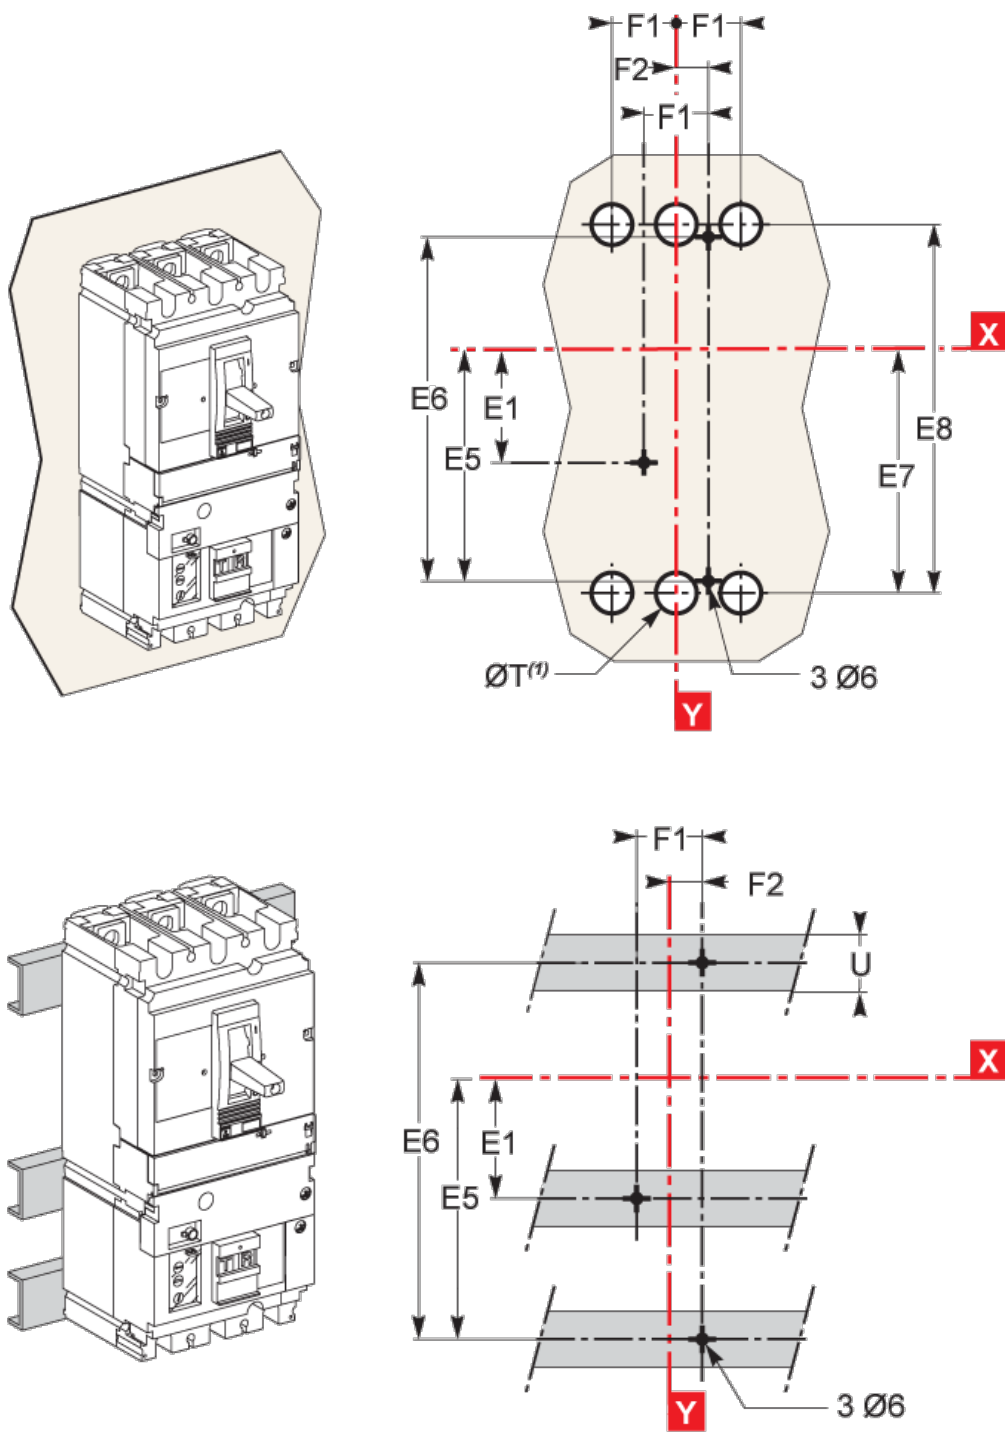

Type	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	B	B1	B2	C1	C2	C3	E1
CVS100/160/250	80.5	181	94	145	178.5	155.5	236	169	220	253.5	52.5	105	140	81	86	111 ⁽²⁾	62.5
CVS400/630	127.5	255	142.5	200	237	227.5	355	242.5	300	337	70	140	185	95.5	110	168	100
Type	E2	E3	E4	E5	E6	E7	E8	F1	F2	F3	G1	G2	G3	G4	G5	ØT	U
CVS100/160/250	125	70	140	137.5	200	145	215	35	17.5	70	95	75	13.5	23	17.5	24	y 32
CVS400/630	200	113.5	227	200	300	213.5	327	45	22.5	90	-	-	-	-	-	32	y 35

(2) C3=126mm for EasyPact CVS250B/F.