




External metering current sensor for N conductor, Frame Size 1, window type, (without copper bar)

Model	
product brand name	SINOVA
size of the circuit-breaker	1
line frequency rated value	
• 50 Hz	Yes
• 60 Hz	Yes
switching capacity class of the circuit breaker	S
suitability for operation	Continuous duty
accessories	current sensors
Net Weight	0.321 kg
ambient temperature during operation	
• minimum	-20 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C
Approvals Certificates	
General Product Approval	

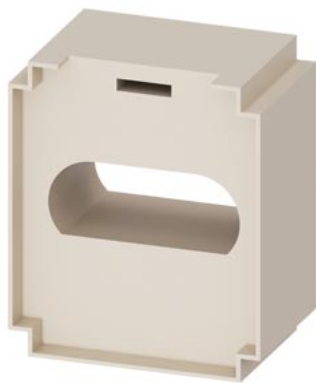

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WJ9111-0AA21
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3WJ9111-0AA21
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WJ9111-0AA21
CAX-Online-Generator https://www.siemens.com/cax
Tender specifications https://www.siemens.com/specifications
Characteristic curves <a href='https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>'>https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>

last modified:

4/4/2025 

