


■ Connection Cables with Connectors



Assembled cables


The cables Q40CBL-3M and Q40CBL-5M serve as connecting cables for I/O modules with 40-pin plug connection.

The cables are prefabricated, i.e. a 40-pin connector is already attached to one cable end.

The cables FA-CBLQ75M□□ are ready made cables for the connection of the positioning modules QD75D1/D2/D4 or QD75P1/P2/P4 to a Mitsubishi Electric servo amplifier MR-J2-Super or MR-C.

Specifications	Q40CBL-3M	Q40CBL-5M	Q40CBL-10M	FA-CBLQ75M2J2-P	FA-CBLQ75M2C-P	FA-CBLQ75PM2J2	FA-CBLQ75PM2C	
Application range	All MELSEC System Q modules with 40-pin connectors, like e.g. QX71, QX72, QY41P, QY42P, QX82(-S1)			QD75D1/D2/D4 for connection with MELSERVO MR-J2-S	QD75D1/D2/D4 for connection with MELSERVO MR-C	QD75P1/P2/P4 for connection with MELSERVO MR-J2-S	QD75P1/P2/P4 for connection with MELSERVO MR-C	
Length	m	3.0	5.0	10.0	2.0	2.0	2.0	
Order information	Art. no.	140991	140997	158068	147697	147698	147699	147700

■ Memory Cards




MELSEC System Q memory cards

All MELSEC System Q CPUs have a permanently installed RAM. This memory can be extended with a variety of external memory cards.

Specifications	Q2MEM-1MBS	Q2MEM-2MBS	Q2MEM-2MBF	Q2MEM-4MBF	Q2MEM-8MBA	Q2MEM-16MBA	Q2MEM-32MBA	
Memory type	SRAM	SRAM	Flash	Flash	ATA	ATA	ATA	
Memory capacity	1 MB	2 MB	2 MB	4 MB	8 MB	16 MB	32 MB	
Order information	Art. no.	127627	145399	127591	129646	129647	129648	129649

Specifications	Q3MEM-4MBS	Q3MEM-4MBS-SET	Q3MEM-8MBS	Q3MEM-8MBS-SET	
Memory type	SRAM	SRAM	SRAM	SRAM	
Memory capacity	4 MB	4 MB	8 MB	8 MB	
Order information	Art. no.	217621	217622	217623	217624

■ PCMCIA Adapter Unit

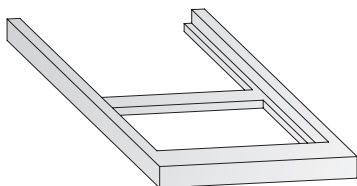

Buffer battery

The lithium battery Q6BAT is the replacement for the battery integrated for data backup in any MELSEC System Q CPU.

Specifications	Q2MEM-ADP	
For memory cards type	All MELSEC Q memory cards	
Order information	Art. no.	129650