








Contactora AC 36 V 50 HZ AC3 45 kW 400 V 3-pole, size S3, screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT5
General technical data	
size of contactor	S3
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state per pole	10.8 W
• without load current share typical	5.94 W
type of calculation of power loss current-dependent	quadratic
insulation voltage rated value	1 000 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	6.8 g / 5 ms, 4 g / 10 ms
shock resistance with sine pulse	
• at AC	10.6 g / 5 ms, 6.2 g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Substance Prohibition (day/month/year)	03/01/2017
Net Weight	1.84 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
• at AC-3 rated value maximum	1 000 V
• at AC-3e rated value maximum	1 000 V
operational current	
• at AC-1 up to 690 V	
— at ambient temperature 40 °C rated value	120 A


— at ambient temperature 60 °C rated value	100 A
● at AC-3	
— at 400 V rated value	95 A
— at 690 V rated value	58 A
● at AC-3e	
— at 400 V rated value	95 A
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
connectable conductor cross-section in main circuit at AC-1	
● at 60 °C minimum permissible	35 mm ²
● at 40 °C minimum permissible	50 mm ²
operational current for approx. 200000 operating cycles at AC-4	
● at 400 V rated value	42 A
● at 690 V rated value	27 A
operating power	
● at AC-1	
— at 230 V at 60 °C rated value	38 kW
— at 400 V at 60 °C rated value	66 kW
— at 690 V at 60 °C rated value	114 kW
● at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	55 kW
● at AC-3e	
— at 230 V rated value	22 kW
— at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	55 kW
— at 1000 V rated value	37 kW
operating power for approx. 200000 operating cycles at AC-4	
● at 400 V rated value	22 kW
● at 690 V rated value	25.4 kW
no-load switching frequency	
● at AC	5 000 1/h
operating frequency	
● at AC-1 maximum	900 1/h
● at AC-3 maximum	850 1/h
● at AC-3e maximum	850 1/h
● at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz rated value	36 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	270 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.68
apparent holding power of magnet coil at AC	
● at 50 Hz	22 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.27
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	0

contact					
number of NO contacts for auxiliary contacts instantaneous contact	0				
operational current at AC-12 maximum	10 A				
operational current at AC-15					
• at 230 V rated value	6 A				
• at 400 V rated value	3 A				
operational current at DC-12					
• at 110 V rated value	3 A				
• at 220 V rated value	1 A				
operational current at DC-13					
• at 24 V rated value	6 A				
• at 110 V rated value	1 A				
• at 220 V rated value	0.3 A				
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)				
UL/CSA ratings					
yielded mechanical performance [hp] for 3-phase AC motor at 460/480 V rated value	75 hp				
Short-circuit protection					
design of the fuse link					
• for short-circuit protection of the main circuit					
— with type of coordination 1 required	fuse gL/gG: 250 A				
— with type of coordination 2 required	fuse gL/gG: 160 A				
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A				
Installation/ mounting/ dimensions					
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface				
fastening method side-by-side mounting	Yes				
fastening method	screw and snap-on mounting onto 35 mm and 75 mm DIN rail				
height	146 mm				
width	70 mm				
depth	139 mm				
Connections/ Terminals					
type of electrical connection					
• for main current circuit	screw-type terminals				
• for auxiliary and control circuit	screw-type terminals				
type of connectable conductor cross-sections for main contacts					
• solid or stranded	2x (2.5 ... 16 mm ²)				
• finely stranded with core end processing	2x (2.5 ... 35 mm ²)				
• finely stranded without core end processing	2x (10 ... 35 mm ²)				
type of connectable conductor cross-sections					
• for auxiliary contacts					
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)				
• for AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12				
Safety related data					
product function mirror contact according to IEC 60947-4-1	Yes				
Electrical Safety					
protection class IP on the front according to IEC 60529	IP20				
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front				
Approvals Certificates					
General Product Approval	EMV				
 CCC	Confirmation	 UL	 EAC	 CE EG-Konf.	 RCM
Maritime application	other	Environment			



Further information

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/products?pnid=16027&lc=en-CN>

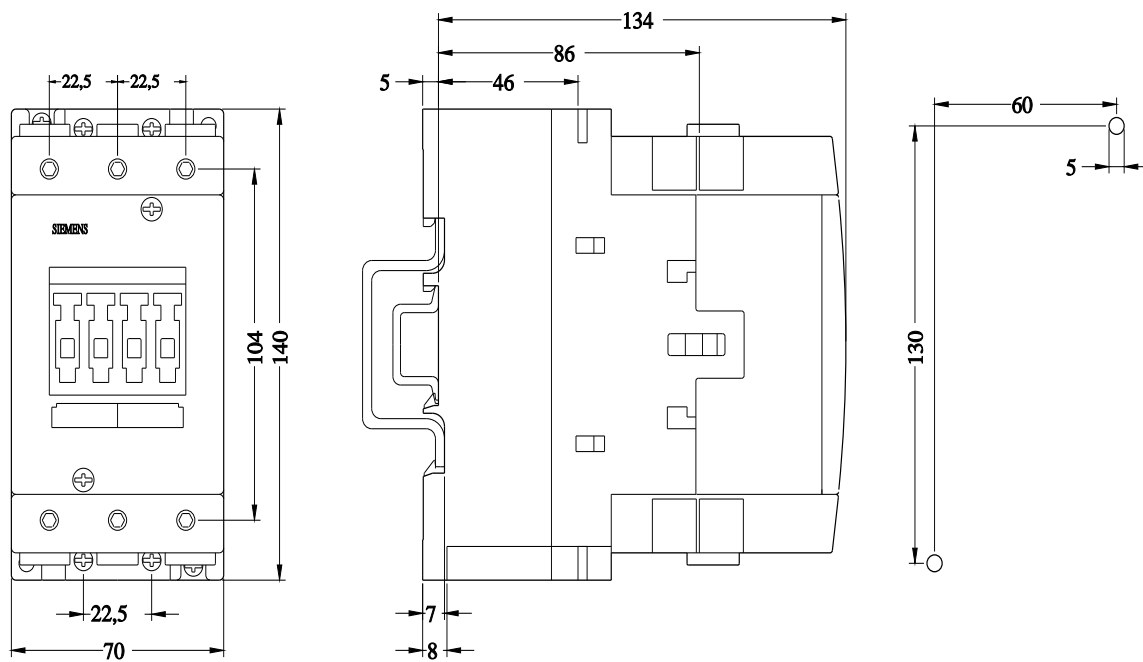



last modified:

4/4/2026 