

Product data sheet

Specifications



universal plug-in relay - Harmony RUM - 3 C/O - 24 V AC - 3 A - with LED

RUMC3GB2B7

! Discontinued

! Discontinued on: Oct 31, 2014

! End-of-service on: Jan 22, 2021

Main

Range of product	Harmony Relay
Series name	Universal
Product or component type	Plug-in relay
Device short name	RUM
Contact operation	Low level
[Uc] control circuit voltage	24 V AC
Contacts type and composition	3 C/O
status LED	With
Control type	Lockable test button
[Ithe] conventional enclosed thermal current	3 A -40...131 °F (-40...55 °C)

Complementary

[Uimp] rated impulse withstand voltage	4 kV
minimum switching current	3 mA
Minimum switching voltage	5 V
Minimum switching capacity	15 mW
Electrical durability	100000 cycles resistive
Average coil consumption in VA	2...3 60 Hz
Operating time	20 ms
Rated operational voltage limits	19.2...26.4 V AC
[Ui] rated insulation voltage	250 V IEC 300 V CSA 300 V UL
Maximum switching voltage	250 V AC IEC 250 V DC IEC
Drop-out voltage threshold	$\geq 0.15 U_c$ AC
[Ie] rated operational current	2 A AC-1/DC-1 NO)IEC 3 A AC-1/DC-1 UL 1 A AC-1/DC-1 NC)IEC
Average resistance	72 Ohm 20 °C +/- 15 %
Maximum switching capacity	750 VA AC 84 W DC
Mechanical durability	5000000 cycles

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Safety reliability data	B10d = 100000
Operating rate	<= 18000 cycles/hour no-load <= 1200 cycles/hour under load
Utilisation coefficient	20 %
Compatibility code	RUM
Dielectric strength	1500 V AC between contacts 1550 V AC between coil and contact 1550 V AC between poles
Protection category	RT I
Pollution degree	3
Operating position	Any position
Contacts material	Gold plated bifurcated silver
Shape of pin	Cylindrical
Net weight	0.190 lb(US) (0.086 kg)

Environment

Ambient air temperature for operation	-40...131 °F (-40...55 °C)
IP degree of protection	IP40 conforming to EN/IEC 60529
Standards	UL 508 CSA C22.2 No 14 EN/IEC 61810-1
Product certifications	UL GOST CSA
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Vibration resistance	3 gn +/- 1 mm 10...150 Hz)10 cycles in operation EN/IEC 60068-2-27 4 gn +/- 1 mm 10...150 Hz)10 cycles not operating EN/IEC 60068-2-27
Shock resistance	10 gnin operation 10 gnnot operating

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)


[How we assess product sustainability >](#)

Use Longer

Lifetime extension	
Repair	No


Dimensions Drawings

Dimensions

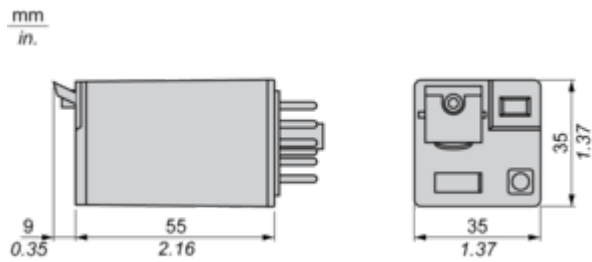

Connections and Schema


Wiring Diagram




Performance Curves

Electrical Durability of Contacts


Durability (inductive load) = durability (resistive load) x reduction coefficient.
Resistive AC load

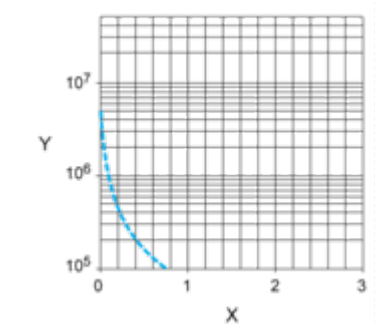

X Switching capacity (kVA)
Y Durability (Number of operating cycles)
Reduction coefficient for inductive AC load (depending on power factor cos φ)

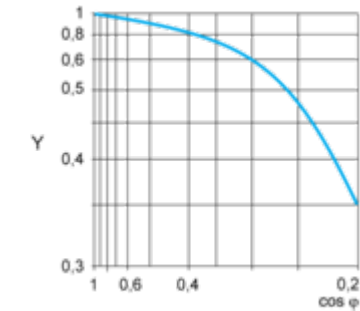

Y Reduction coefficient (A)
Maximum switching capacity on resistive DC load

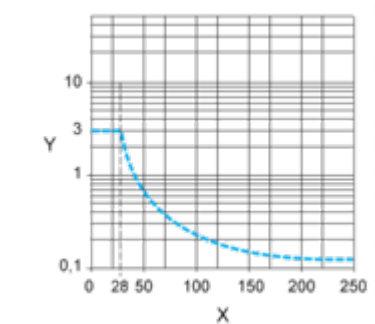

X Voltage DC
Y Current DC
Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.