



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 4268.00 USD



Main

Commercial Status	Commercialised
Range of product	Modicon Quantum automation platform
Product or component type	RIO drop adaptor module

Complementary

Product compatibility	Quantum
Number of I/O expansion module	<= 27
Type of cable	Coaxial 75 Ohm
Transmission rate	1544 Mbit/s
Dynamic range	35 dB
Isolation voltage	500 V DC coaxial center and ground
Electrical connection	2 female connectors F elbowed with redundant cable
Diagnostics startup	Executive checksum Power up and runtime RAM address/data
Power dissipation in W	3.8 W 2 channels
Bus current requirement	750 mA 2 channels
Module format	Standard

Environment

Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 CUL UL 508
Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901778813
Nbr. of units in pkg.	1
Package weight(Lbs)	2.21
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental Profile
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Period	18 months
--------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

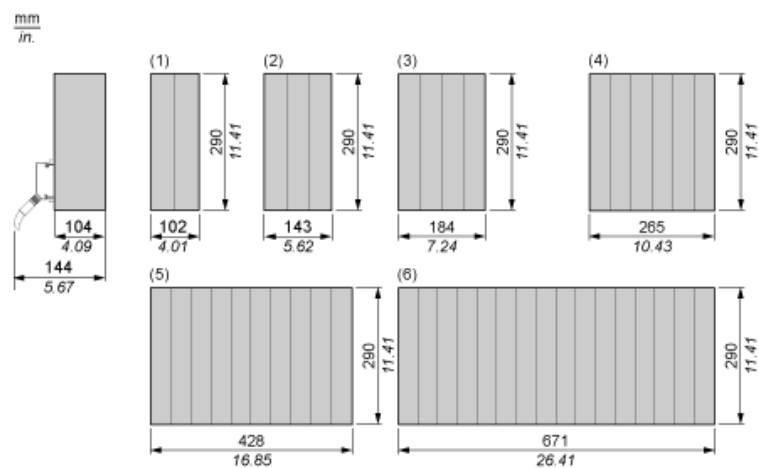

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots