

# Product datasheet

Specifications



## TeSys F - star delta starter - 3 x 3P (3 NO) - 265 A - 220/230 V AC coil

LC3F265M7A64

ⓘ Discontinued

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Longer

| Lifetime extension |    |
|--------------------|----|
| Repair             | No |



Dimensions Drawings

Dimensions and Drawings

Chassis mounted starters

Pre-assembled: LC3 F185 to LC3 F400

For customer assembly: 2 x LC1 F●●● and 1 x LC1 D150 or 3 x LC1 F●●●

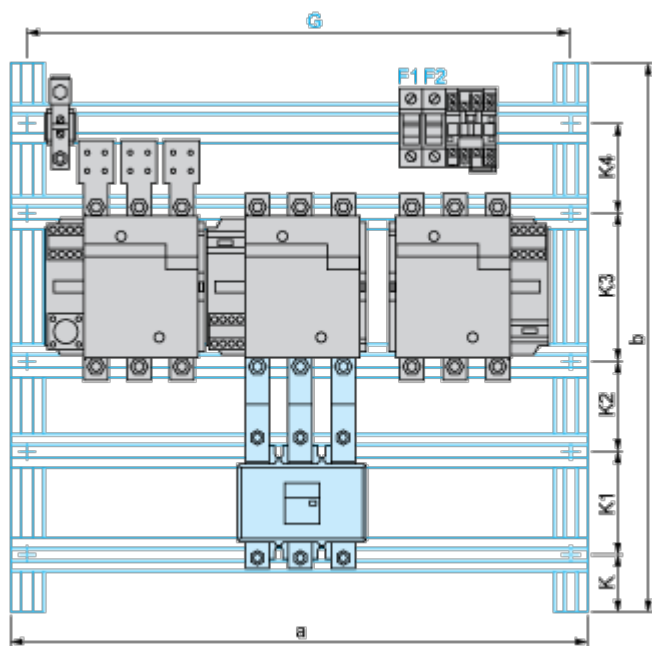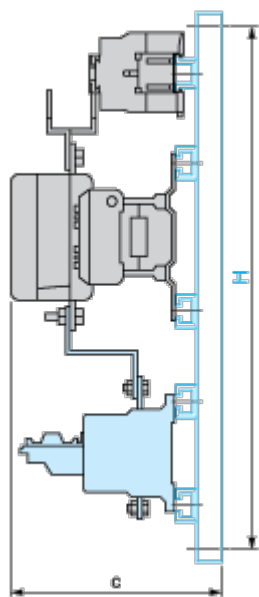

|                                                           | a   | b   | c   | G   | H   | K   | K1  | K2 | K3  | K4 |
|-----------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|----|-----|----|
| LC3 F185 or 2 x LC1 F●●● + 1 x LC1 D with components F185 | 565 | 675 | 235 | 525 | 625 | 160 | 110 | 80 | 110 | 80 |
| LC3 F225 or 3 x LC1 F●●● with components F225             | 565 | 675 | 235 | 525 | 625 | 160 | 110 | 80 | 110 | 80 |

|                                               | a   | b   | c   | G   | H   | K   | K1  | K2  | K3  | K4  |
|-----------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| LC3 F265 or 3 x LC1 F●●● with components F265 | 665 | 775 | 266 | 625 | 725 | 165 | 110 | 100 | 110 | 110 |
| LC3 F330 or 3 x LC1 F●●● with components F330 | 765 | 975 | 276 | 725 | 825 | 195 | 140 | 100 | 110 | 180 |
| LC3 F400 or 3 x LC1 F●●● with components F400 | 765 | 975 | 276 | 725 | 925 | 195 | 140 | 100 | 180 | 110 |