

Product data sheet

Specifications



expansion module, Modicon MCM, Ethernet/IP diagnostic, screw

XPSMCMCO0000E

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon MCM
Product or Component Type	Non-safe communication module
Device short name	XPSMCM
[Us] rated supply voltage	24 V - 20...20 % DC

Complementary

Power dissipation in W	3 W
Quality labels	CE
Range Compatibility	Modicon M221 Modicon M241 Modicon M262
Connector type	RJ45
Method of access	Server
Transmission rate	10/100 Mbit/s
Communication Port Protocol	EtherNet/IP EtherCAT Modbus TCP PROFINET
Current Consumption	0.125 mA
Maximum cable distance between devices	328.08 ft (100 m)
Local signalling	LED green PWR power ON LED green RUN operating LED red E IN internal error LED red E EX external error LED green/red MS module status LED green/red NS network status
Connections - terminals	captive screw clamp terminals, removable terminal block
Cable cross section	0.0003...0.002 in ² (0.2...1.5 mm ²) - AWG 24...AWG 16 flexible without cable end 0.0003...0.004 in ² (0.2...2.5 mm ²) - AWG 24...AWG 14 flexible without cable end 0.0004...0.002 in ² (0.25...1 mm ²) - AWG 23...AWG 18 flexible with cable end, without bezel 0.0004...0.004 in ² (0.25...2.5 mm ²) - AWG 23...AWG 14 flexible with cable end, with bezel 0.0004...0.004 in ² (0.25...2.5 mm ²) - AWG 23...AWG 14 flexible with cable end, without bezel 0.0008...0.002 in ² (0.5...1.5 mm ²) - AWG 20...AWG 16 flexible with cable end, with double bezel 0.0003...0.002 in ² (0.2...1 mm ²) - AWG 24...AWG 18 solid without cable end 0.0003...0.004 in ² (0.2...2.5 mm ²) - AWG 24...AWG 14 solid without cable end
Mounting support	Omega 35 mm DIN rail EN 50022
Width	0.9 in (22.5 mm)
Height	3.9 in (99 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Depth	4.5 in (114.5 mm)
Product Weight	0.7 lb(US) (0.3 kg)

Environment

Product Certifications	cULus RCM TÜV
IP Degree of Protection	IP20
Ambient air temperature for operation	14...131 °F (-10...55 °C)
Ambient Air Temperature for Storage	-4...185 °F (-20...85 °C)
Relative humidity	10...95 %
Pollution degree	2
Insulation	250 V AC between power supply and housing IEC 61800-5-1
Overvoltage category	II
Electromagnetic compatibility	Electrostatic discharge immunity test - test level: 6 kV (on contact) conforming to IEC 61000-4-2 Electrostatic discharge immunity test - test level: 20 kV (on air) conforming to IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80...1000 MHz) conforming to IEC 61000-4-3 Susceptibility to electromagnetic fields - test level: 30 V/m (1.4 GHz...2 GHz) conforming to IEC 61000-4-3
Vibration resistance	+/-0.35 mm (f= 10...55 Hz) conforming to IEC 61496-1
Shock resistance	10 gn 16 ms) 1000 shocks on each axis IEC 61496-1
Operating altitude	6561.68 ft (2000 m)
Service Life	20 year(s)

Ordering and shipping details

Category	US1SAF222477
Discount Schedule	SAF2
GTIN	3606487042242
Returnability	Yes
Country of origin	IT

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	6.496 in (16.500 cm)
Package 1 Width	4.961 in (12.600 cm)
Package 1 Length	1.772 in (4.500 cm)
Package weight(Lbs)	7.972 oz (226.000 g)
Unit Type of Package 2	S01
Number of Units in Package 2	6
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	5.906 in (15.000 cm)
Package 2 Length	15.748 in (40.000 cm)

Package 2 Weight	3.527 lb(US) (1.600 kg)
------------------	-------------------------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	117 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	8 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	108 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	0
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

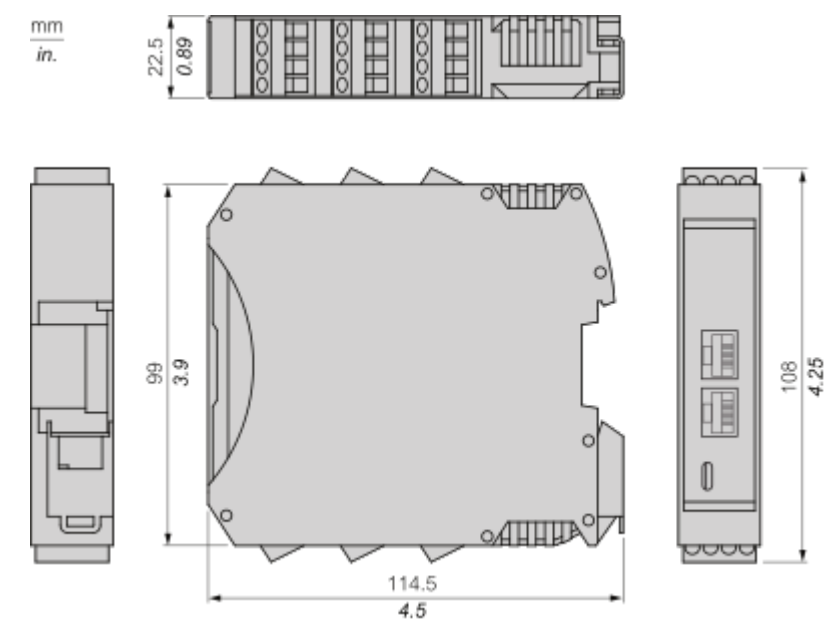

Mounting and Clearance


Mounting Safety Controller CPU with Module(s)

Mount BackPlane Connector on Rail

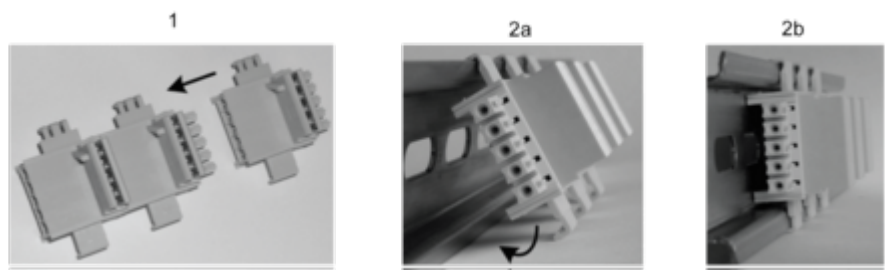

- 1 : Connect as much Backplane Connector as module to be install.
- 2 : Fix the connectors to the rail (Top first).


Mount Safety Controller CPU with Other Module(s)

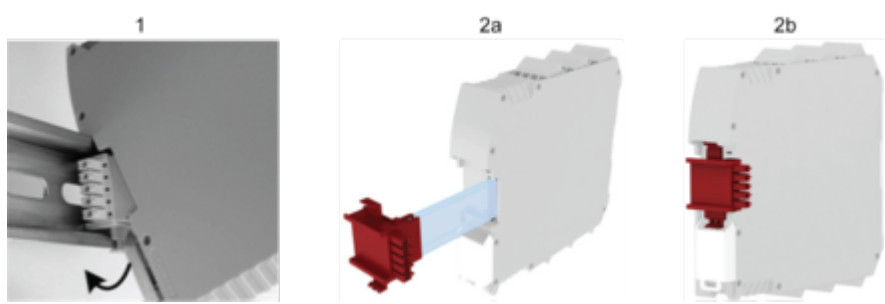

- 1 : Mount controller CPU and modules on rail.
- 2 : Make sure that the controller CPU or the module(s) are plugged on the BackPlane connector.


Connections and Schema

Connector Details

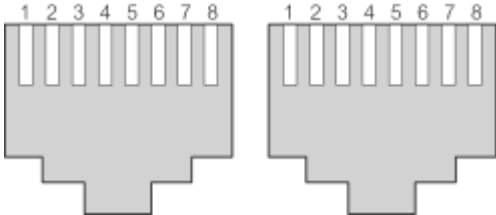Reference description	ETH: Multi protocol module (Ethernet/IP, EtherCAT, Modbus TCP and Profinet)
Output and PIN number	ETH (Ethernet/IP, EtherCat, Modbus TCP and Profinet)  RJ45 - female For EtherCAT, ETH 1 = IN and ETH 2 = OUT
Wiring	PIN / Signal 1 : Tx+ 2 : Tx- 3 : Rx+ 4 : not used 5 : not used 6 : Rx- 7 : not used 8 : not used
Baud rate	10/100 Mbit/s (full duplex) XPSMCMC10804E(


Wiring

Terminal Designation

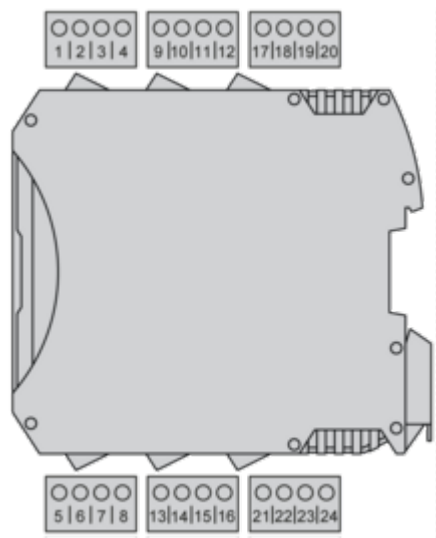

Terminal	Signal	Description
1	24 VDC	24 Vdc power supply
2	-	Not connected
3		
4		
5	0 VDC	0 Vdc power supply
6	-	Not connected
7		
8		

Wiring Example

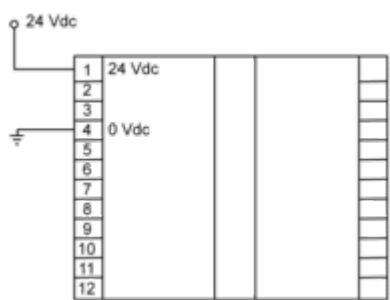

Technical Illustration

Dimensions

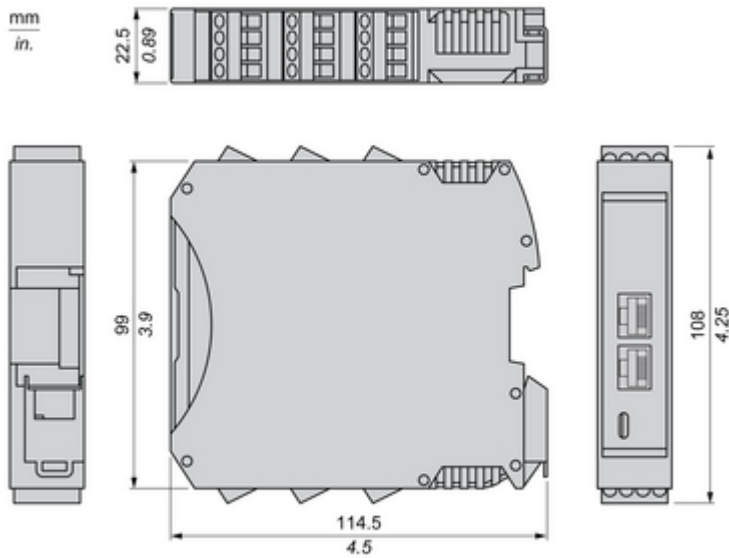


Image of product / Alternate images

Alternative





