

Product data sheet

Specifications



Remote Display, Modicon M171/ M172/M173, flush mounted optimized display

TM173DLED

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon M171/M172/M173
Product or Component Type	Display module
Display colour	Monochrome
Supply	External source

Complementary

Display Type	2 x 7-segment LED
Number of key	4
Color	White
[Us] rated supply voltage	24 V AC/DC
Marking	CE UL
Overvoltage category	II
Height	3.2 in (80.5 mm)
Width	1.4 in (34.5 mm)
Depth	1.4 in (34.6 mm)
Net Weight	0.090 lb(US) (0.041 kg)

Environment

Standards	UL 94 EN 60730-1 EN 60730-2-9
Product Certifications	UKCA UL CSA
Ambient Air Temperature for Operation	-4...149 °F (-20...65 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
IP degree of protection	IP65
Pollution degree	2

Ordering and shipping details

Category	US1PC1222537
Discount Schedule	PC12
GTIN	3606487045540

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Returnability	Yes
Country of origin	IT

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.756 in (7.000 cm)
Package 1 Width	3.661 in (9.300 cm)
Package 1 Length	5.197 in (13.200 cm)
Package weight(Lbs)	3.986 oz (113.000 g)
Unit Type of Package 2	S01
Number of Units in Package 2	5
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	5.906 in (15.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	26.596 oz (754.000 g)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	49 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	9 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	40 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	Ae86ba94-4547-4a45-9448-245a31615fc7
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
Upgradeability	Yes

Use Again




Repack and remanufacture

Recyclability potential, in %	0
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

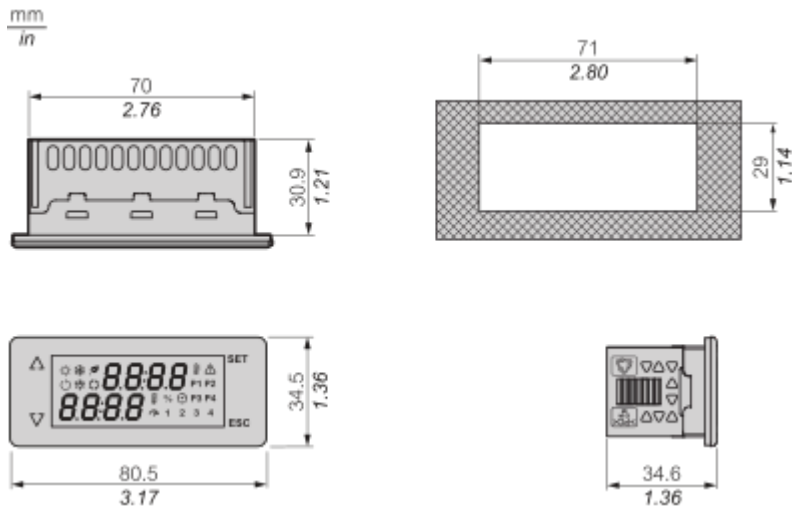

Mounting and Clearance

Mounting

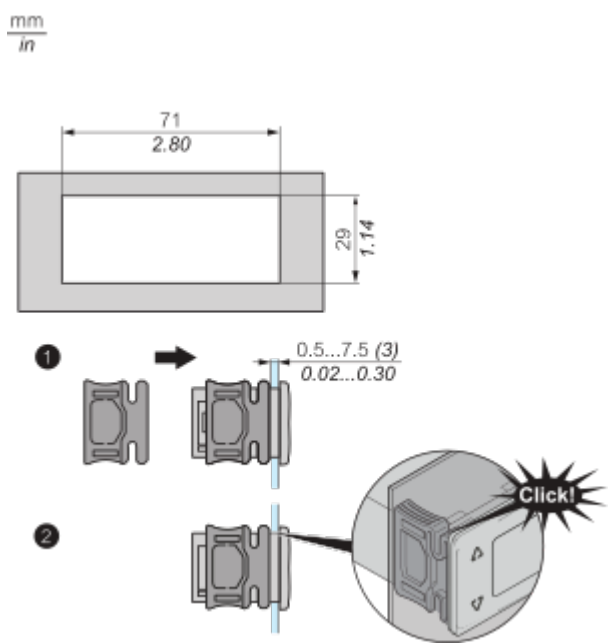

- (1) Insert the device
- (2) Secure it with the special brackets provided
- (3) Front panel only (tested in accordance with EN 60529 with a steel sheet 2 mm (0.08 in.) thick $\pm 10\%$)

Image of product / Alternate images

Alternative



