

Article No. : 6SL3220-1YD38-0UB0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :



Figure similar

### Rated data

#### Input

|                    |                           |
|--------------------|---------------------------|
| Number of phases   | 3 AC                      |
| Line voltage       | 380 ... 440 V +10 % -20 % |
| Line frequency     | 47 ... 63 Hz              |
| Rated current (LO) | 84.00 A                   |

#### Output

|                                     |              |
|-------------------------------------|--------------|
| Number of phases                    | 3 AC         |
| Rated voltage                       | 400 V        |
| Rated power IEC 400V (LO)           | 45.00 kW     |
| Rated current 400V (IN)             | 82.50 A      |
| Rated current 380V (IN)             | 85.00 A      |
| Rated current (LO)                  | 82.50 A      |
| Max. output current                 | 91.00 A      |
| Pulse frequency                     | 4 kHz        |
| Output frequency for vector control | 0 ... 240 Hz |
| Output frequency for V/f control    | 0 ... 550 Hz |

#### Overload capability

|                                                          |
|----------------------------------------------------------|
| Low Overload (LO)                                        |
| 110% base load current IL for 60 s in a 300 s cycle time |

### General tech. specifications

|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| Power factor $\lambda$            | 0.75 ... 0.93                             |
| Offset factor $\cos \varphi$      | 0.99                                      |
| Efficiency $\eta$                 | 0.97                                      |
| Sound pressure level (1m)         | 62.2 dB                                   |
| Power loss <sup>3)</sup>          | 1.260 kW                                  |
| Filter class (integrated)         | Unfiltered                                |
| EMC category (with accessories)   | without                                   |
| Safety function "Safe Torque Off" | without SIRIUS device (e.g. via S7-1500F) |

### Communication

|               |                               |
|---------------|-------------------------------|
| Communication | USS, Modbus RTU, BACnet MS/TP |
|---------------|-------------------------------|

### Inputs / outputs

#### Standard digital inputs

|                        |       |
|------------------------|-------|
| Number                 | 6     |
| Switching level: 0 → 1 | 11 V  |
| Switching level: 1 → 0 | 5 V   |
| Max. inrush current    | 15 mA |

#### Fail-safe digital inputs

|        |   |
|--------|---|
| Number | 0 |
|--------|---|

#### Digital outputs

|                                    |                |
|------------------------------------|----------------|
| Number as relay changeover contact | 4              |
| Output (resistive load)            | DC 30 V, 1.0 A |
| Number as transistor               | 0              |

#### Analog / digital inputs

|            |                        |
|------------|------------------------|
| Number     | 2 (Differential input) |
| Resolution | 12 bit                 |

#### Switching threshold as digital input

|       |       |
|-------|-------|
| 0 → 1 | 4 V   |
| 1 → 0 | 1.6 V |

#### Analog outputs

|        |                         |
|--------|-------------------------|
| Number | 2 (Non-isolated output) |
|--------|-------------------------|

#### PTC/ KTY interface

|                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------|
| 1 motor temperature sensor input, sensors that can be connected: PTC, KTY, PT1000 and Thermo-Click, accuracy $\pm 5$ °C |
|-------------------------------------------------------------------------------------------------------------------------|

### Closed-loop control techniques

|                                           |     |
|-------------------------------------------|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC)       | Yes |
| V/f ECO linear / square-law               | Yes |
| Sensorless vector control                 | Yes |
| Vector control, with sensor               | No  |
| Encoderless torque control                | Yes |
| Torque control, with encoder              | No  |


Data sheet for SINAMICS G120XA

Article No. : 6SL3220-1YD38-0UB0

| Ambient conditions          |                                                                |
|-----------------------------|----------------------------------------------------------------|
| Standard board coating type | Class 3C2, according to IEC 60721-3-3: 2002                    |
| Cooling                     | Air cooling using an integrated fan                            |
| Cooling air requirement     | 0.083 m³/s (2.931 ft³/s)                                       |
| Installation altitude       | 1,000 m (3,280.84 ft)                                          |
| Ambient temperature         |                                                                |
| Operation                   | -20 ... 60 °C (-4 ... 140 °F)                                  |
| Transport                   | -40 ... 70 °C (-40 ... 158 °F)                                 |
| Storage                     | -40 ... 70 °C (-40 ... 158 °F)                                 |
| Relative humidity           |                                                                |
| Max. operation              | 95 % At 40 °C (104 °F), condensation and icing not permissible |

| Connections                    |                                       |
|--------------------------------|---------------------------------------|
| Signal cable                   |                                       |
| Conductor cross-section        | 0.15 ... 1.50 mm² (AWG 24 ... AWG 16) |
| Line side                      |                                       |
| Version                        | screw-type terminal                   |
| Conductor cross-section        | 10.00 ... 35.00 mm² (AWG 8 ... AWG 2) |
| Motor end                      |                                       |
| Version                        | Screw-type terminals                  |
| Conductor cross-section        | 10.00 ... 35.00 mm² (AWG 8 ... AWG 2) |
| DC link (for braking resistor) |                                       |
| PE connection                  | Screw-type terminals                  |
| Max. motor cable length        |                                       |
| Shielded                       | 200 m (656.17 ft)                     |
| Unshielded                     | 300 m (984.25 ft)                     |

| Mechanical data                                      |                                                             |
|------------------------------------------------------|-------------------------------------------------------------|
| Degree of protection                                 | IP20 / UL open type                                         |
| Frame size                                           | FSD                                                         |
| Net weight                                           | 16.6 kg (36.60 lb)                                          |
| Dimensions                                           |                                                             |
| Width                                                | 200 mm (7.87 in)                                            |
| Height                                               | 472 mm (18.58 in)                                           |
| Depth                                                | 239 mm (9.41 in)                                            |
| Standards                                            |                                                             |
| Compliance with standards                            | CE, EAC, RCM, RoHS II                                       |
| CE marking                                           | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |
| Converter losses to IEC61800-9-2*                    |                                                             |
| Efficiency class                                     | IE2                                                         |
| Comparison with the reference converter (90% / 100%) | 46.4 %                                                      |

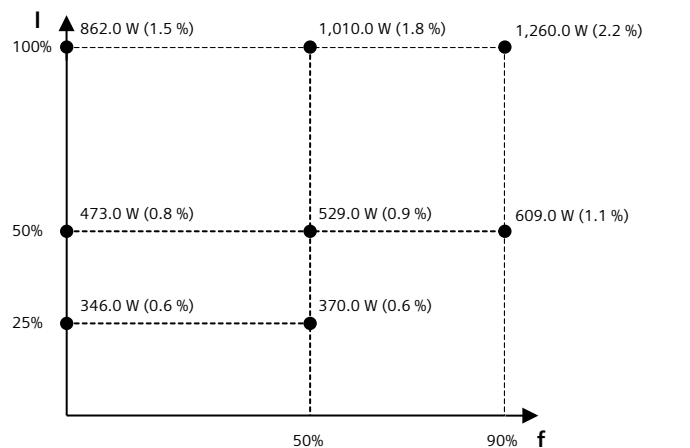

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>3)</sup>Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.