


Product datasheet

Specifications



plug-in electromechanical relay - 10 mm - 24 V DC - 1 CO

ABR7S23

⚠ Discontinued on: 9 Feb 2023

⚠ Discontinued

Main

Range of product	Advantys Telefast ABE7
Product or component type	Plug-in electromechanical relay
Control circuit type	DC
minimum ordered quantity	Set of 4

Complementary

Width pitch dimension	10 mm
Product compatibility	ABE7P16T215 ABE7P16T230 ABE7P16T212 ABE7R16T231 ABE7P16T214 ABE7P16T230E ABE7R16T230 ABE7P16T210
[Uc] control circuit voltage	24 V
[Ith] conventional free air thermal current	5 A
Contacts type and composition	1 C/O
Threshold tripping voltage	19.7 V at 40 °C
Drop-out voltage	2.4 V at 20 °C
Drop-out current	1 mA at 20 °C
Maximum power dissipation per pole	0.36 W
Associated fuse rating	1 A, fast blow
Maximum switching voltage	130 V DC conforming to IEC 60947-5-1 250 V AC 50/60 Hz conforming to IEC 60947-5-1
Electrical durability	500000 cycles, maximum switching current: 1200 mA at 230 V AC-12 500000 cycles, maximum switching current: 1200 mA at 24 V DC-12 500000 cycles, maximum switching current: 450 mA at 24 V DC-13 10 ms 500000 cycles, maximum switching current: 700 mA at 230 V AC-15
Minimum switching current	10 mA at >= 5 V
electrical reliability	1e-008
Operating rate in Hz	10 Hz no load 0.5 Hz at 1e
Mechanical durability	20000000 cycles
[Uimp] rated impulse withstand voltage	2.5 kV conforming to IEC 60947-1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product weight	0.01 kg
	0.008 kg

Environment

Max immunity to microbreaks	5 ms
Dielectric strength	2000 V conforming to IEC 60947-1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	4.500 cm
Package 1 Length	4.500 cm
Package 1 Weight	8.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Height	3.500 cm
Package 2 Width	4.500 cm
Package 2 Length	4.500 cm
Package 2 Weight	35.000 g
Unit Type of Package 3	S01
Number of Units in Package 3	288
Package 3 Height	15.000 cm
Package 3 Width	15.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	2.805 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
PVC free	Yes

Use Longer

Lifetime extension	
Repair	No


Use Again

Repack and remanufacture	
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Performance Curves

Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1

DC Loads

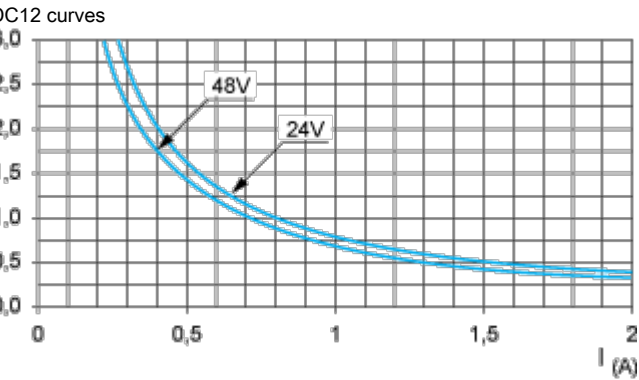


DC12 control of resistive loads and of solid state loads isolated by optocoupler, $I/R \leq 1$ ms.

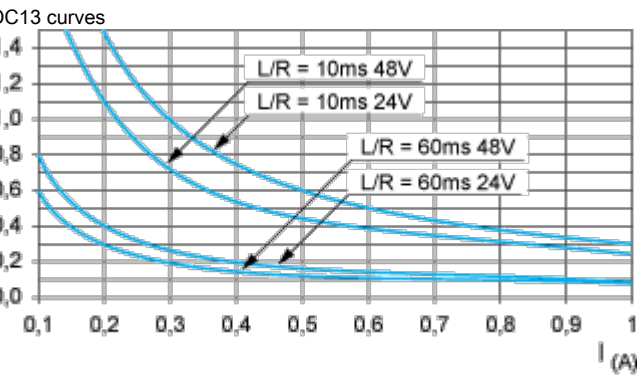


DC13 switching electromagnets, $L/R \leq 2 \times (U_e \times I_e)$ in ms, U_e : rated operational voltage, I_e : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)

AC Loads

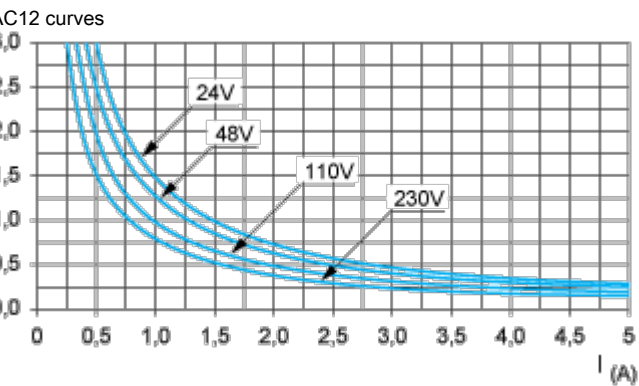


AC12 control of resistive loads and of solid state loads isolated by optocoupler, $\cos \phi \geq 0.9$.

AC14 curves

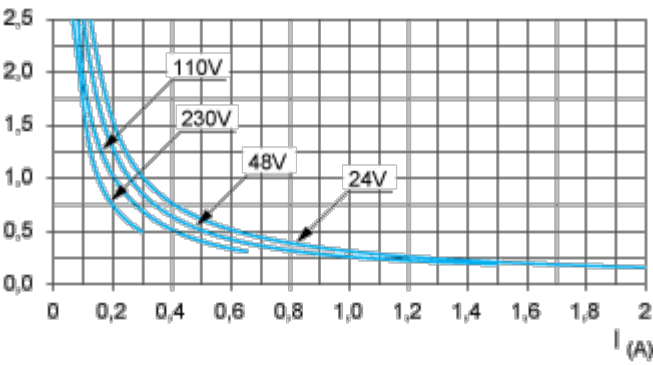

AC14 control of small electromagnetic loads ≤ 72 VA, make: $\cos \phi = 0.3$, break: $\cos \phi = 0.3$.

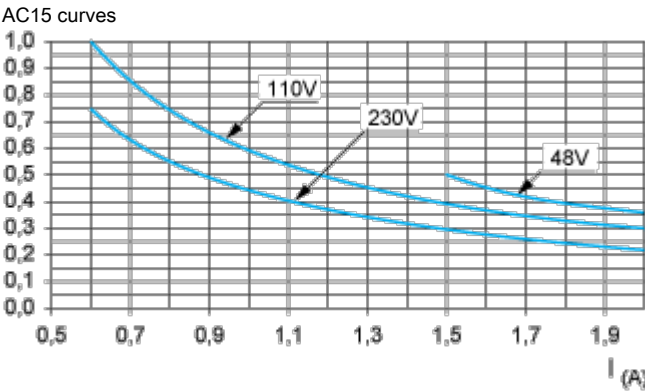

AC15 control of electromagnetic loads > 72 VA, make: $\cos \phi = 0.7$, break: $\cos \phi = 0.4$.

Image of product / Alternate images

Alternative

