

Product datasheet

Specifications



AC servo motor BSH - 5.5 N.m - 4000 rpm - keyed shaft - with brake - IP50

BSH1002T12F1A

⚠ Discontinued on: 9 Feb 2023

⚠ Discontinued

EAN Code: 3389118139602

Main

Device short name	BSH
Product or component type	Servo motor
Maximum mechanical speed	6000 rpm
Continuous stall torque	5.5 N.m for LXM15LD28M3, 230 V, three phase 5.5 N.m for LXM05AD42M3X, 200...240 V, three phase 5.5 N.m for LXM05BD42M3X, 200...240 V, three phase 5.5 N.m for LXM05CD42M3X, 200...240 V, three phase
Peak stall torque	11.59 N.m for LXM15LD28M3, 230 V, three phase 16 N.m for LXM05AD42M3X, 200...240 V, three phase 16 N.m for LXM05BD42M3X, 200...240 V, three phase 16 N.m for LXM05CD42M3X, 200...240 V, three phase
Nominal output power	1400 W for LXM05AD42M3X, 200...240 V, three phase 1400 W for LXM05BD42M3X, 200...240 V, three phase 1400 W for LXM05CD42M3X, 200...240 V, three phase 1700 W for LXM15LD28M3, 230 V, three phase
Nominal torque	4 N.m for LXM15LD28M3, 230 V, three phase 4.4 N.m for LXM05AD42M3X, 200...240 V, three phase 4.4 N.m for LXM05BD42M3X, 200...240 V, three phase 4.4 N.m for LXM05CD42M3X, 200...240 V, three phase
Nominal speed	3000 rpm for LXM05AD42M3X, 200...240 V, three phase 3000 rpm for LXM05BD42M3X, 200...240 V, three phase 3000 rpm for LXM05CD42M3X, 200...240 V, three phase 4000 rpm for LXM15LD28M3, 230 V, three phase
Product compatibility	LXM05AD42M3X at 200...240 V three phase LXM05BD42M3X at 200...240 V three phase LXM05CD42M3X at 200...240 V three phase LXM15LD28M3 at 230 V three phase
Shaft end	Keyed
IP degree of protection	IP50 standard
Speed feedback resolution	131072 points/turn x 4096 turns
Holding brake	With
Mounting support	International standard flange
Electrical connection	Straight connectors

Complementary

Range compatibility	Lexium 05 Lexium 15
supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	9.9 A

maximum continuous power	2.51 W
Maximum permanent current	35.4 A
Second shaft	Without second shaft end
Shaft diameter	19 mm
Shaft length	40 mm
Key width	30 mm
Feedback type	Multiturn SinCos Hiperface
Holding torque	9 N.m holding brake
Motor flange size	100 mm
Number of motor stacks	2
Torque constant	0.59 N.m/A at 120 °C 0.64 N.m/A at 120 °C
Back emf constant	37 V/krpm at 120 °C 33 V/krpm at 120 °C
Number of motor poles	8
Rotor inertia	2.928 kg.cm ²
Stator resistance	0.56 Ohm at 20 °C 0.6 Ohm at 20 °C
Stator inductance	2.9 mH at 20 °C 3 mH at 20 °C
Stator electrical time constant	4.83 ms at 20 °C 5.26 ms at 20 °C
Maximum radial force Fr	620 N at 4000 rpm 690 N at 3000 rpm 790 N at 2000 rpm 990 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Brake pull-in power	18 W
Type of cooling	Natural convection
Length	235.5 mm
Centring collar diameter	95 mm
Centring collar depth	3.5 mm
Number of mounting holes	4
Mounting holes diameter	9 mm
Circle diameter of the mounting holes	115 mm
Net weight	6.3 kg
Sizing reference	BSH1002T
Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Height	15.4 cm
Package 1 Width	16.3 cm
Package 1 Length	40.7 cm
Package 1 Weight	6.45 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture


End of life manual availability

No need of specific recycling operations

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

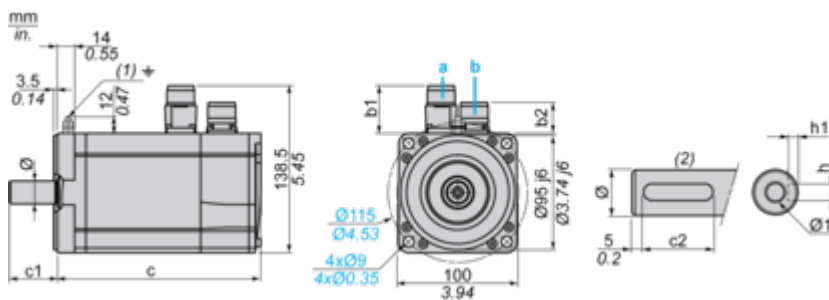

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder

- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2								
39.5	25.5	39.5	39.5	205	236	40	30	6 N9	3.5 ^{+0.1} ₀	19 k6	M6 x 16

Dimensions in in.


Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2								
1.55	1.00	1.55	1.55	8.07	9.29	1.57	1.18	0.24 N9	0.14 ^{+0.1} ₀	0.75 k6	M6 x 0.63

Performance Curves

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive

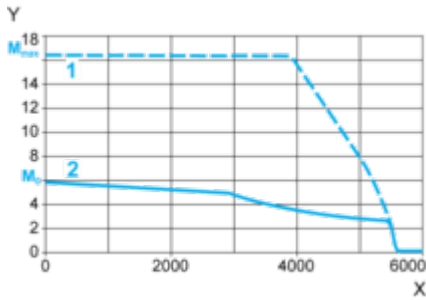

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque