

Product datasheet

Specifications



miniature plug in relay, Harmony Electromechanical Relays, 3A, 4CO, with LED, 48V DC

RXM4LB2ED

⚠ Discontinued on: 01 Dec 2024

⚠ To be discontinued

Main

| | |
|--|----------------------------------|
| Range of product | Harmony Electromechanical Relays |
| Series name | RXM series |
| Product or component type | Plug-in relay |
| Relay type | Miniature relay |
| Contacts type and composition | 4 C/O |
| [Uc] control circuit voltage | 48 V DC |
| [Ithe] conventional enclosed thermal current | 3 A at -40...55 °C |

Complementary

| | |
|----------------------------------|--|
| status LED | With |
| Control type | Without lockable test button |
| [Ie] rated operational current | 1.5 A at 28 V (DC) NC conforming to IEC 1.5 A at 250 V (AC) NC conforming to IEC 3 A at 28 V (DC) NO conforming to IEC 3 A at 250 V (AC) NO conforming to IEC 3 A at 24 V (DC) NO conforming to IEC 3 A at 220 V (AC) NO conforming to IEC 3 A at 28 V (DC) conforming to UL 3 A at 250 V (AC) conforming to UL |
| Minimum switching capacity | 25 mW subject to switching frequency, environment or expected reliability level etc |
| Rated operational voltage limits | 38.4...52.8 V DC |
| [Ui] rated insulation voltage | 250 V conforming to IEC |
| Maximum switching voltage | 250 V AC 28 V DC |
| Drop-out voltage threshold | $\geq 0.1 U_c$ DC |
| Load current | 3 A at 250 V AC 3 A at 28 V DC |
| Maximum switching capacity | 750 VA AC 84 W DC |
| Minimum switching current | 5 mA subject to switching frequency, environment or expected reliability level etc |
| Minimum switching voltage | 5 V subject to switching frequency, environment or expected reliability level etc |
| Average resistance | 2600 Ohm at 23 °C +/- 10 % |
| Average coil consumption | 0.9 W, DC |
| Mechanical durability | 20000000 cycles |
| Electrical durability | 200000 cycles resistive load 23 °C 100000 cycles resistive load at 55 °C |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

| | |
|--------------------------------------|--|
| Safety reliability data | B10d = 100000 |
| Operating rate | <= 1200 cycles/hour under load <= 18000 cycles/hour no-load |
| Utilisation coefficient | 20 % |
| Dielectric strength | 2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation 1000 V AC between contacts with micro disconnection |
| Protection category | RT I |
| Pollution degree | 2 |
| Operating position | Any position |
| Test levels | Level A group mounting |
| Sale per indivisible quantity | 10 |
| Contacts material | Silver alloy (Ag/Ni) |
| Shape of pin | Flat (faston type) |
| Net weight | 0.035 kg |

Environment

| | |
|--|--|
| Standards | IEC 61810-1 (iss. 2) CE UL 508 |
| Ambient air temperature for storage | -40...85 °C |
| Vibration resistance | 3 gn, amplitude = +/- 1 mm (f = 10...50 Hz)operating conforming to IEC 60068-2-6 6 gn, amplitude = +/- 1 mm (f = 10...50 Hz)not operating conforming to IEC 60068-2-6 |
| Shock resistance | 30 gn for not operating conforming to IEC 60068-2-27 10 gn for in operation conforming to IEC 60068-2-27 |

Packing Units

| | |
|-------------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 2.104 cm |
| Package 1 Width | 2.757 cm |
| Package 1 Length | 4.59 cm |
| Package 1 Weight | 40.0 g |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Height | 3.0 cm |
| Package 2 Width | 11.1 cm |
| Package 2 Length | 13.3 cm |
| Package 2 Weight | 390.0 g |
| Unit Type of Package 3 | S02 |
| Number of Units in Package 3 | 270 |
| Package 3 Height | 15.0 cm |
| Package 3 Width | 30.0 cm |
| Package 3 Length | 40.0 cm |

| | |
|------------------|----------|
| Package 3 Weight | 10.74 kg |
|------------------|----------|

Contractual warranty

| | |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

| | |
|--|---|
| Total lifecycle Carbon footprint | 14 kg CO2 eq. |
| Environmental Disclosure | Product Environmental Profile |
| Carbon footprint of the manufacturing phase [A1 to A3] | 0.3 kg CO2 eq. |
| Carbon footprint of the distribution phase [A4] | 0 kg CO2 eq. |
| Carbon footprint of the installation phase [A5] | 0 kg CO2 eq. |
| Carbon footprint of the use phase [B2, B3, B4, B6] | 14 kg CO2 eq. |
| Carbon footprint of the end-of-life phase [C1 to C4] | 0 kg CO2 eq. |

Use Better



Materials and Substances

| | |
|--|--|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| REACH Regulation | REACH Declaration |

Use Longer




Lifetime extension

| | |
|--------|----|
| Repair | No |
|--------|----|

Use Again




Repack and remanufacture


| | |
|---------------------------------|---|
| End of life manual availability | End of Life Information |
| Take-back | No |
| WEEE Label |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions Drawings

Dimensions

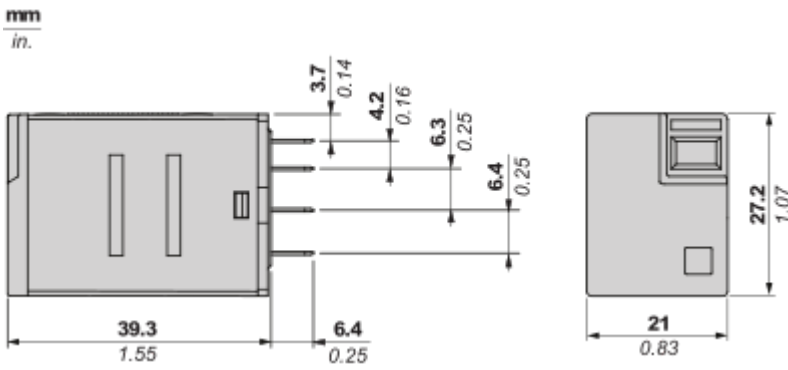


Pin Side View

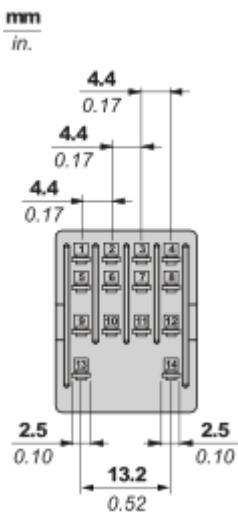

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Performance Curves

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

For 4 Poles Relay

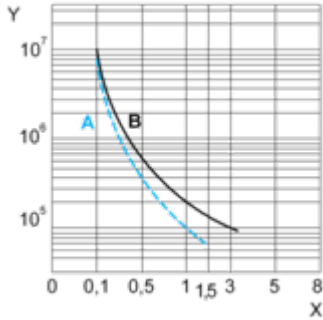

X : Contact current (A)

Y : Durability (Number of operating cycles)

A : Inductive load


B : Resistive load

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

Maximum Switching Capacity

For 4 Poles Relay

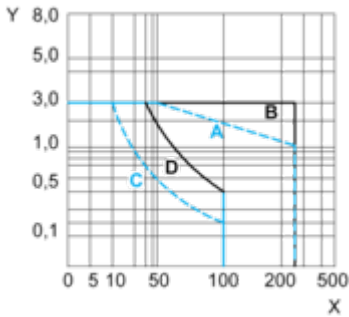

X : Contact voltage (v)

Y : Contact current (A)

A : Inductive AC load

B : Resistive AC load

C : Inductive DC load

D : Resistive DC load


Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

For low level loads (below 10mA), we recommend to use RXM*GB series with bifurcated contacts relays instead.

Technical Illustration

Dimensions

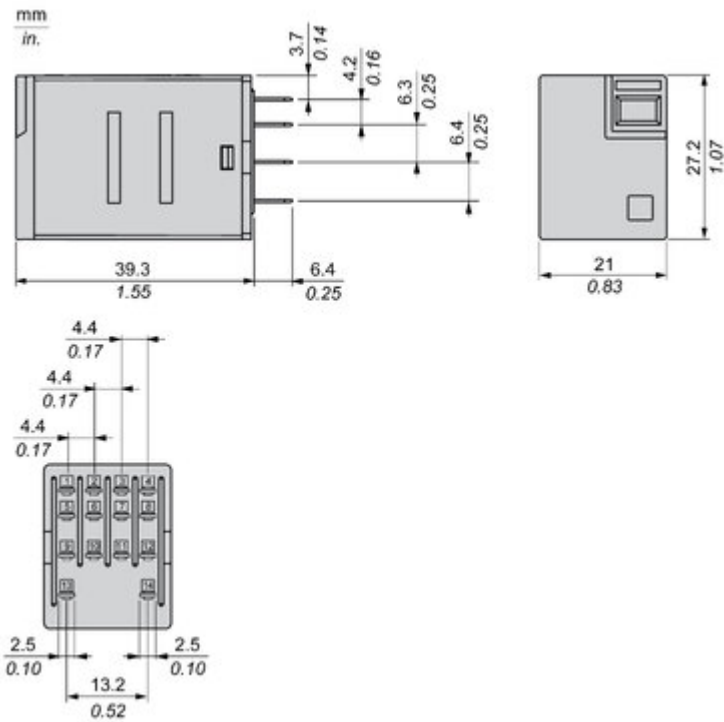

Offer Marketing Illustration

Product benefits / Features

Features

Easy Harmony RXMLB Relay



Fit to customer needs
coverage of most general
control panel applications



Easy to select
simple selection and
wide availability





Convenient to use
Easy status readiness
through mechanical
indicator & LED



Safe to perform
product reliability,
compliance with
industrial standard
and eco-design

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony RXMLB Relay

RXM*LB sockets:

- Mixed contact arrangement
- Screw clamp terminal

Metal maintaining clamp:
reliable in vibration
environment

Finger grip cover to
easily remove relay
from socket



RXM*LB sockets:

- 2CO-5A, 4CO-3A
- 12-110VDC, 24-230VAC

Mechanical indicator
for contact status

"Power On" LED for
relays status

Image of product / Alternate images

Alternative

