



fail-safe digital module DM-F local, for fail-safe shutdown via hardware signal Us: 24 V DC 2 relay enabling circuits, 2 relay outputs, safety function can be set via DIP switch, maximum achievable SIL IEC 61508: 3, maximum achievable PL ISO 13849-1: E

product brand name	SIMOCODE
product designation	Fail-safe digital module
design of the product	for emergency off and safety doors
product type designation	DM-FL
General technical data	
product function	
<ul style="list-style-type: none"> • EMERGENCY OFF function • automatic start • light barrier monitoring • light array monitoring • protective door monitoring • magnetically operated switch monitoring NC-NO • magnetically operated switch monitoring NC-NC • pressure-sensitive mat monitoring • monitored start-up 	<p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>
product component	
<ul style="list-style-type: none"> • input for thermistor connection • digital input • input for analog temperature sensors • input for ground fault detection • relay output 	<p>No</p> <p>Yes</p> <p>No</p> <p>No</p> <p>Yes</p>
consumed active power	3 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
surge voltage resistance rated value	4 000 V
shock resistance according to IEC 60068-2-27	15 g / 11 ms
vibration resistance according to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2 g
operating frequency maximum	360 1/y
switching capacity current of the NO contacts of the relay outputs at AC-15	
<ul style="list-style-type: none"> • at 24 V • at 120 V • at 240 V 	<p>3 A</p> <p>3 A</p> <p>1.5 A</p>
switching capacity current of the NO contacts of the relay outputs at DC-13	
<ul style="list-style-type: none"> • at 24 V • at 60 V • at 125 V • at 250 V 	<p>4 A</p> <p>0.55 A</p> <p>0.22 A</p> <p>0.11 A</p>
switching capacity current of relay enabling circuits at AC-15	

<ul style="list-style-type: none"> • at 24 V • at 120 V • at 240 V 	<p>3 A</p> <p>3 A</p> <p>1.5 A</p>
switching capacity current of relay enabling circuits at DC-13	
<ul style="list-style-type: none"> • at 24 V • at 60 V • at 125 V • at 250 V 	<p>4 A</p> <p>0.55 A</p> <p>0.22 A</p> <p>0.11 A</p>
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) typical	100 000
buffering time in the event of power failure	60 ms
recovery time	
<ul style="list-style-type: none"> • after power failure typical • after opening of the safety circuits typical 	<p>8 s</p> <p>250 ms</p>
make time with automatic start	
<ul style="list-style-type: none"> • typical • maximum • at DC maximum • after power failure typical • after power failure maximum 	<p>50 ms</p> <p>100 ms</p> <p>100 ms</p> <p>8 000 ms</p> <p>8 200 ms</p>
backslide delay time after opening of the safety circuits typical	50 ms
backslide delay time in the event of power failure	
<ul style="list-style-type: none"> • typical • maximum 	<p>40 ms</p> <p>80 ms</p>
reference code according to IEC 81346-2	F
reference code according to IEC 81346-2:2019	F
type of input characteristic	Type 2 in accordance with EN 61131-2
Substance Prohibition (day/month/year)	05/01/2012
SVHC substance name	<p>Lead CAS-No. 7439-92-1</p> <p>Lead monoxide (lead oxide) CAS-No. 1317-36-8</p> <p>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5</p> <p>Melamine CAS-No. 108-78-1</p> <p>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1</p>
Net Weight	0.35 kg
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
conducted interference	
<ul style="list-style-type: none"> • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 	<p>2 kV network connection / 1 kV control connection</p> <p>1 kV</p> <p>0.5 kV</p> <p>10 V</p>
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
conducted HF interference emissions according to CISPR11	corresponds to degree of severity A
field-bound HF interference emission according to CISPR11	corresponds to degree of severity A
Inputs/ Outputs	
product function	
<ul style="list-style-type: none"> • parameterizable inputs • parameterizable outputs 	<p>Yes</p> <p>Yes</p>
number of inputs	5
design of input	
<ul style="list-style-type: none"> • cascading input/functional switching • feedback input • start input 	<p>Yes</p> <p>Yes</p> <p>Yes</p>
pulse duration	

<ul style="list-style-type: none"> • of the sensor input minimum 	30 ms
<ul style="list-style-type: none"> • of the ON pushbutton input minimum 	0.2 s
<ul style="list-style-type: none"> • of the cascading input minimum 	0.2 s
number of digital inputs	0
<ul style="list-style-type: none"> • with a common reference potential 	4
digital input version	
<ul style="list-style-type: none"> • type 1 acc. to IEC 61131 	No
<ul style="list-style-type: none"> • type 2 acc. to IEC 61131 	Yes
number of analog inputs	0
number of sensor inputs	
<ul style="list-style-type: none"> • 1-channel or 2-channel 	1
<ul style="list-style-type: none"> • 2-channel 	1
number of outputs	2
number of semiconductor outputs	0
number of outputs as contact-affected switching element	
<ul style="list-style-type: none"> • 	2
<ul style="list-style-type: none"> • as NO contact safety-related instantaneous contact 	2
number of analog outputs	0
switching behavior	monostable
property of contacts of the relay outputs	Fail-safe NO contacts
wire length for digital signals maximum	1 500 m

Product Function

suitability for use	
<ul style="list-style-type: none"> • position switch monitoring 	Yes
<ul style="list-style-type: none"> • EMERGENCY-OFF circuit monitoring 	Yes
<ul style="list-style-type: none"> • valve monitoring 	No
<ul style="list-style-type: none"> • opto-electronic protection device monitoring 	Yes
<ul style="list-style-type: none"> • tactile sensor monitoring 	No
<ul style="list-style-type: none"> • magnetically operated switch monitoring 	Yes
<ul style="list-style-type: none"> • proximity switch monitoring 	No
<ul style="list-style-type: none"> • safety switch 	Yes
<ul style="list-style-type: none"> • safety-related circuits 	Yes

Installation/ mounting/ dimensions

mounting position	any
fastening method	screw and snap-on mounting
height	106 mm
width	45 mm
depth	124 mm
required spacing	
<ul style="list-style-type: none"> • top 	40 mm
<ul style="list-style-type: none"> • bottom 	40 mm
<ul style="list-style-type: none"> • left 	0 mm
<ul style="list-style-type: none"> • right 	0 mm

Connections/ Terminals

product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid 	1x (0.5 ... 4.0mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> • finely stranded with core end processing 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> • for AWG cables solid 	1x (20 ... 12), 2x (20 ... 14)
<ul style="list-style-type: none"> • for AWG cables stranded 	1x (20 ... 14), 2x (20 ... 16)
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in] with screw-type terminals	7 ... 10.3 lbf·in

Ambient conditions

installation altitude at height above sea level	
<ul style="list-style-type: none"> • 1 maximum 	2 000 m
<ul style="list-style-type: none"> • 2 maximum 	3 000 m; max. +50 °C (no protective separation)
<ul style="list-style-type: none"> • 3 maximum 	4 000 m; max. +40 °C (no protective separation)

ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport 	<p>-25 ... +60 °C</p> <p>-40 ... +80 °C</p> <p>-40 ... +80 °C</p>
environmental category	
<ul style="list-style-type: none"> during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 	<p>3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4</p> <p>2K2, 2C1, 2S1, 2M2</p>
relative humidity during operation	5 ... 95 %
contact rating of auxiliary contacts according to UL	B300 / R300
Short-circuit protection	
design of the fuse link for short-circuit protection of relay enabling circuits required	gL/gG: 4 A
Safety related data	
safe state	Safety outputs switched off
diagnostics test interval by internal test function maximum	28 800 s
stop category according to IEC 60204-1	0
failure rate [FIT] at rate of recognizable hazardous failures (λ_{dd})	868 FIT
failure rate [FIT] at rate of non-recognizable hazardous failures (λ_{du})	7 FIT
average diagnostic coverage level (DCavg)	
<ul style="list-style-type: none"> at single-channel evaluation at 2-channel evaluation 	<p>90 %</p> <p>99 %</p>
IEC 62061	
Safety Integrity Level (SIL)	
<ul style="list-style-type: none"> at single-channel evaluation according to IEC 62061 at 2-channel evaluation according to IEC 62061 	<p>1</p> <p>3</p>
ISO 13849	
performance level (PL)	
<ul style="list-style-type: none"> at single-channel evaluation according to ISO 13849-1 at 2-channel evaluation according to ISO 13849-1 	<p>d</p> <p>e</p>
category	
<ul style="list-style-type: none"> at single-channel evaluation according to ISO 13849-1 at 2-channel evaluation according to ISO 13849-1 	<p>2</p> <p>4</p>
IEC 61508	
Safety Integrity Level (SIL)	
<ul style="list-style-type: none"> at single-channel evaluation according to IEC 61508 at 2-channel evaluation according to IEC 61508 	<p>1</p> <p>3</p>
safety device type according to IEC 61508-2	Type B
PFDavg with low demand rate	
<ul style="list-style-type: none"> at single-channel evaluation according to IEC 61508 at 2-channel evaluation according to IEC 61508 	<p>0.00065</p> <p>2E-5</p>
Safe failure fraction (SFF)	99 %
hardware fault tolerance	
<ul style="list-style-type: none"> at single-channel evaluation according to IEC 61508 at 2-channel evaluation according to IEC 61508 	<p>0</p> <p>1</p>
T1 value for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
touch protection against electrical shock	finger-safe
ATEX	
certificate of suitability according to ATEX directive 2014/34/EU	BVS 06 ATEX F001
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)
Galvanic isolation	
(electrically) protective separation according to IEC 60947-1	All circuits in SIMOCODE pro are with protective separation, i.e. they are designed with doubled creepage paths and clearances. NOTICE: The information in the "Protective Separation" test report, No. 2668, must be observed.

design of the electrical isolation	Protective separation in accordance with IEC 60947-1 for all circuits, up to installation altitude of 2000 m
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.8
• full-scale value	1.2
inrush current peak	
• at 24 V	8.3 A
duration of inrush current peak	
• at 24 V	1 ms

Approvals Certificates

Environment	General Product Approval
--------------------	---------------------------------

[Environmental Confirmations](#)



General Product Approval	EMV	For use in hazardous locations
---------------------------------	------------	---------------------------------------

[TUEV](#)



For use in hazardous locations	Functional Safety	Test Certificates	Maritime application
---------------------------------------	--------------------------	--------------------------	-----------------------------



[Miscellaneous](#)

[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)



Maritime application	other	Industrial Communication
-----------------------------	--------------	---------------------------------



[Confirmation](#)

[Confirmation](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7320-1AB00-0>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7320-1AB00-0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UF7320-1AB00-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7320-1AB00-0&lang=en

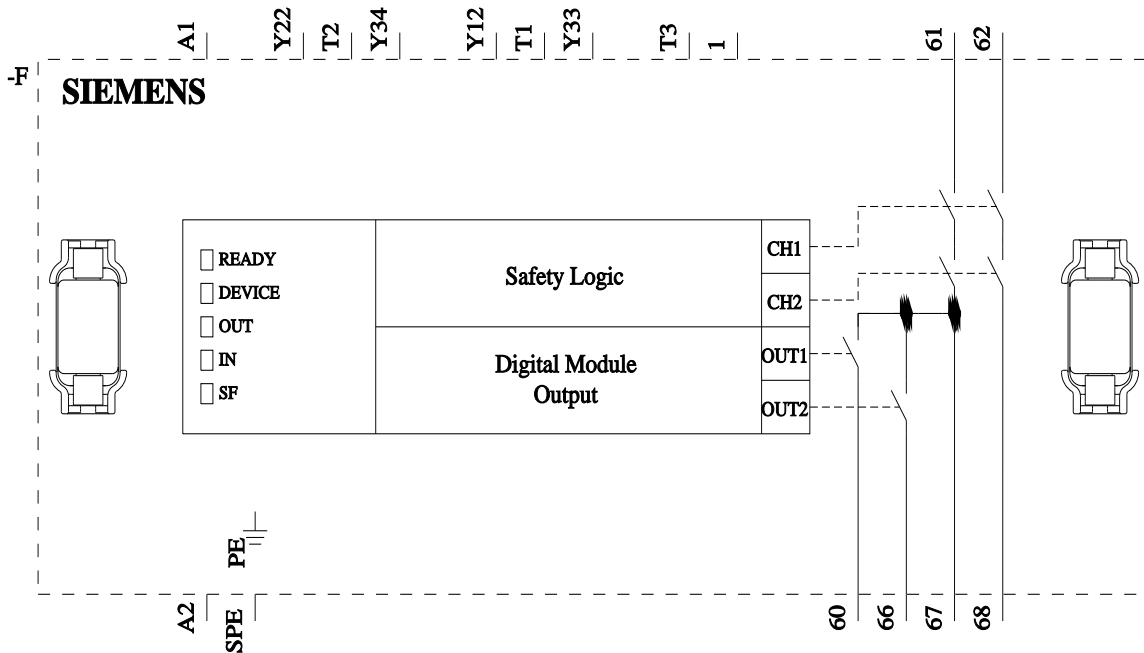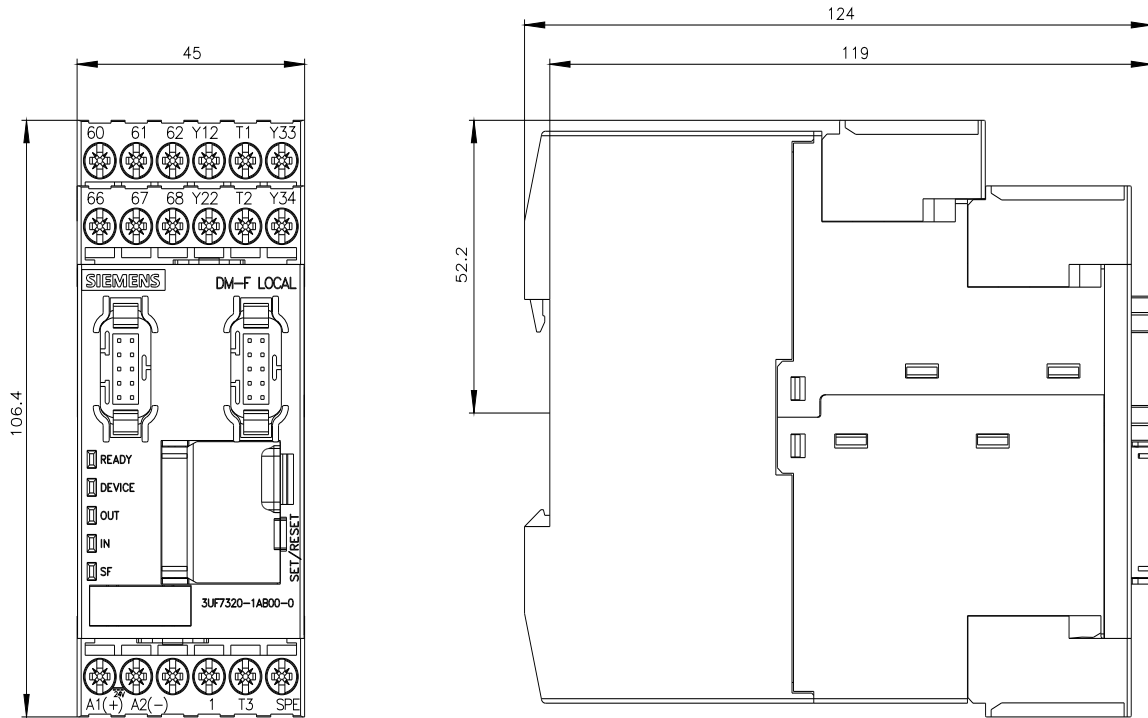

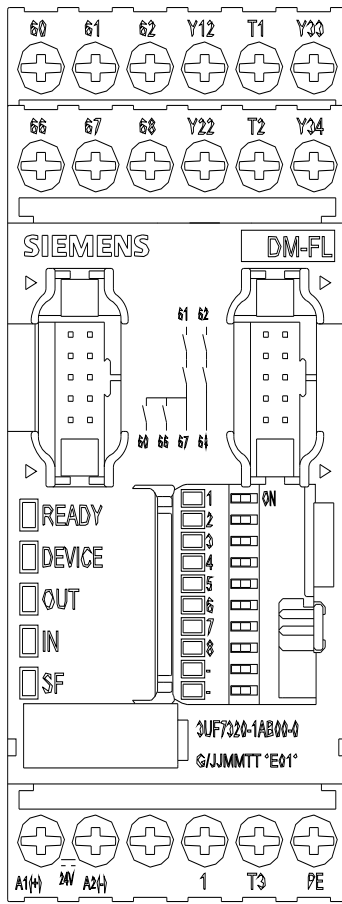

last modified:

4/4/2026 