

# Product datasheet

Specifications



passive filter, Altivar, 187A, 400V,  
50Hz, for variable speed drive

VW3A46132

## Main

Product or component type	Passive filter
Product specific application	Reduction of current harmonics

## Complementary

Range compatibility	Altivar Process ATV900 Altivar Process ATV600 Altivar 71 Altivar 61
[Us] rated supply voltage	400 V +/- 10 %
power supply frequency	50 Hz +/- 2 %
Quantity per drive	1 filter per drive for variable speed drive ATV650 wall mount, motor: 75 kW/100 hp 1 filter per drive for variable speed drive ATV630 wall mount, motor: 75 kW/100 hp 1 filter per drive for variable speed drive ATV950 wall mount, motor: 75 kW/100 hp 1 filter per drive for variable speed drive ATV930 wall mount, motor: 75 kW/100 hp 1 filter per drive for variable speed drive ATV61H motor: 110 kW/150 hp 1 filter per drive for variable speed drive ATV71H motor: 110 kW/150 hp 1 filter per drive for variable speed drive ATV61Q motor: 110 kW/150 hp 1 filter per drive for variable speed drive ATV71Q motor: 110 kW/150 hp
[In] rated current	180 A for input 187 A for output
Network number of phases	3 phases
THDI	5 % for variable speed drive ATV650 motor: 75 kW/100 hp 5 % for variable speed drive ATV630 motor: 75 kW/100 hp 5 % for variable speed drive ATV61H motor: 110 kW/150 hp 5 % for variable speed drive ATV71H motor: 110 kW/150 hp 5 % for variable speed drive ATV61Q motor: 110 kW/150 hp 5 % for variable speed drive ATV71Q motor: 110 kW/150 hp 5 % for variable speed drive ATV950 motor: 75 kW/100 hp 5 % for variable speed drive ATV930 motor: 75 kW/100 hp
Max current	1.5 x nominal current (duration = 60 s)
Efficiency	98 %
Thermal losses	1080 W
Cos phi	1 (150 % of line current) 0.85 (75 % of line current) 0.99 (100 % of line current)
Electrical connection	A, B terminal, connection capacity: 2.5 mm <sup>2</sup> X1-1...X2-3 terminal, connection capacity: 2.5...90 mm <sup>2</sup>
Electrical insulation class	Class F
Net weight	135 kg

## Environment

IP degree of protection	IP20 IP55 (enclosure mounting)
-------------------------	-----------------------------------

<b>Vibration resistance</b>	2 mm peak to peak (f= 5...13.2 Hz) conforming to IEC 60068-2-6 0.7 gn (f= 13.2...150 Hz) conforming to IEC 60068-2-6
<b>Relative humidity</b>	5...85 % without condensation
<b>Ambient air temperature for operation</b>	45...60 °C (with current derating 3 % per °C) 5...45 °C (without current derating)
<b>Ambient air temperature for storage</b>	-25...55 °C storage in original packaging -25...65 °C during transport
<b>Operating altitude</b>	<= 1000 m without current derating > 1000...4000 m with current derating 5 % per 1000 m
<b>Standards</b>	IEC 61000-3-2 IEC 61000-2-4 IEC 61000-3-4 IEC 61000-2-2 IEC 61000-3-12 G5/4 engineering recommendation

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	62.0 cm
<b>Package 1 Width</b>	60.0 cm
<b>Package 1 Length</b>	80.0 cm
<b>Package 1 Weight</b>	135.0 kg

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better



#### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

No

### Use Longer



#### Lifetime extension

Repair

No

### Use Again




#### Repack and remanufacture

Take-back

No

Dimensions Drawings

Dimensions

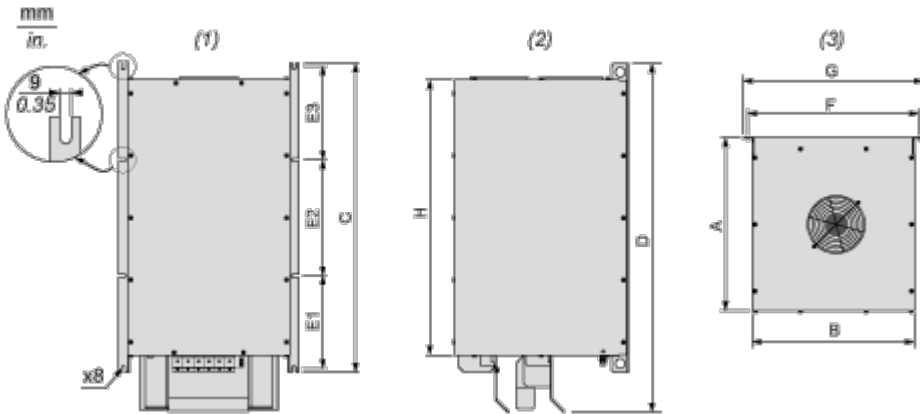

- (1) Front view
- (2) Right side view
- (3) Top view

Dimensions in mm

A	B	C	D	E1	E2	E3	F	G	H
400	370	685	767.6	212	240	212	393	418	598

Dimensions in in.

A	B	C	D	E1	E2	E3	F	G	H
15.75	14.57	26.97	30.22	8.35	9.45	8.35	15.47	16.46	23.54


Mounting and Clearance

Mounting Recommendations

---

Vertical Mounting Only

mm  
in.

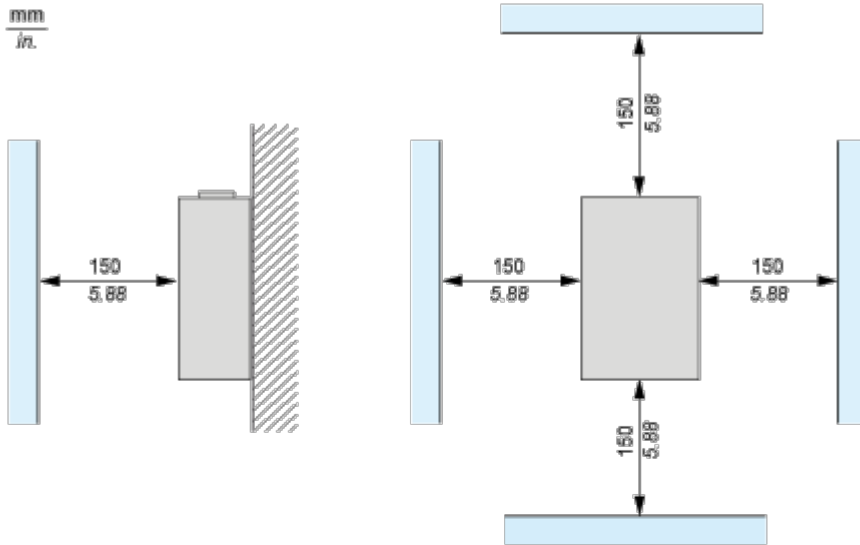

(1) Filter

