

Product data sheet

Specifications



Motor circuit breaker, Easy TeSys Power, GZ1LE, 3P, push-button, 1.6A, magnetic trip

GZ1LE06

Main

Range	Easy TeSys
Range of product	Easy TeSys Power
Product or component type	Circuit breaker
Device short name	GZ1LE
Device application	Motor
Trip unit technology	Magnetic
Suitability for isolation	Yes conforming to IEC 60947-1 appendix 7.1.6
Colour	Grey (RAL 7011)

Complementary

Poles description	3P
Network type	AC
Utilisation category	AC-3
Network frequency	50/60 Hz conforming to IEC 60947-2
Mounting mode	By screws By clips
Mounting support	Rail
Mounting position	Any position
Motor power kW	0.37 kW at 400 V AC 50/60 Hz 0.55 kW at 440 V AC 50/60 Hz 0.75 kW at 500 V AC 50/60 Hz 1.1 kW at 690 V AC 50/60 Hz
Breaking capacity	Icu: >= 100 kA at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 Icu: >= 100 kA at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 Icu: >= 100 kA at 440 V AC 50/60 Hz conforming to IEC 60947-2 Icu: >= 100 kA at 500 V AC 50/60 Hz conforming to IEC 60947-2 Icu: >= 100 kA at 690 V AC 50/60 Hz conforming to IEC 60947-2
[Ics] rated service short-circuit breaking capacity	100 % at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 440 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 500 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 690 V AC 50/60 Hz conforming to IEC 60947-2
Control type	Push-button
[In] rated current	1.6 A
Magnetic tripping current	22.5 A
[Ue] rated operational voltage	690 V AC 50/60 Hz conforming to IEC 60947-2
[Ui] rated insulation voltage	690 V AC 50/60 Hz conforming to IEC 60947-2

[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2
Power dissipation	2.5 W (per pole)
Mechanical durability	100000 cycles
Electrical durability	100000 cycles for AC-3
maximum operating rate	25 cyc/h
Connections - terminals	Screw clamp terminals 2 1...6 mm ² - cable stiffness: solid Screw clamp terminals 2 1.5...6 mm ² - cable stiffness: flexible without cable end Screw clamp terminals 2 1...4 mm ² - cable stiffness: flexible with cable end
Height	89 mm
Width	44.5 mm
Depth	78 mm
Net weight	0.25 kg

Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-2 EN/IEC 60947-4-1 GB/T 14048.1 GB/T 14048.2 GB/T 14048.4 EN/IEC 60335-1:Clause 30.2 EN/IEC 60335-2-40:Annex JJ
Product certifications	CB Scheme CCC CE EAC
Protective treatment	TH
IP degree of protection	IP20 conforming to IEC 60529
Ambient air temperature for operation	-20...60 °C
Ambient air temperature for storage	-40...80 °C
Fire resistance	960 °C conforming to IEC 60695-2-1
Operating altitude	2000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.7 cm
Package 1 Width	9.1 cm
Package 1 Length	8.4 cm
Package 1 Weight	238.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	24
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	6.122 kg
Unit Type of Package 3	P06

Number of Units in Package 3	384
Package 3 Height	105.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	99.84 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	44 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	2 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.5 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	40 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.7 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	25204872-3df4-48c8-9f77-906ce87e060b

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	57
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Offer Marketing Illustration

Product benefits / Features



Easy TeSys Motor Circuit Breakers

Range Accessories



Contact blocks



Auxiliary contact



Mounting accessories



Manual starter enclosure



Manual starter padlocking

Offer Marketing Illustration

Product benefits / Features

Easy TeSys Motor Circuit Breakers

Technical Benefits



Specifically designed for the control and protection of motors conforming to standards IEC 60947-2 and IEC 60947-4-1

Thermal-magnetic or magnetic protection

Push button control

One size from 0.37 to 15 Kw under 440V

Icu breaking capacity up to 100kA

One size from 0.1A to 32A, Width = 44.5 mm

Offer Marketing Illustration

Product benefits / Features

Easy TeSys Motor Circuit Breakers



Designed for the essential

Designed to deliver essential control & protection, providing the right balance between performance and cost without quality compromise



Easy choice and application

Easier to install, order and understand, operates with multi-standard screws




Cost-effective

Provides a cost-effective solution to simple light duty applications



Technical Illustration

Assembly's dimensions

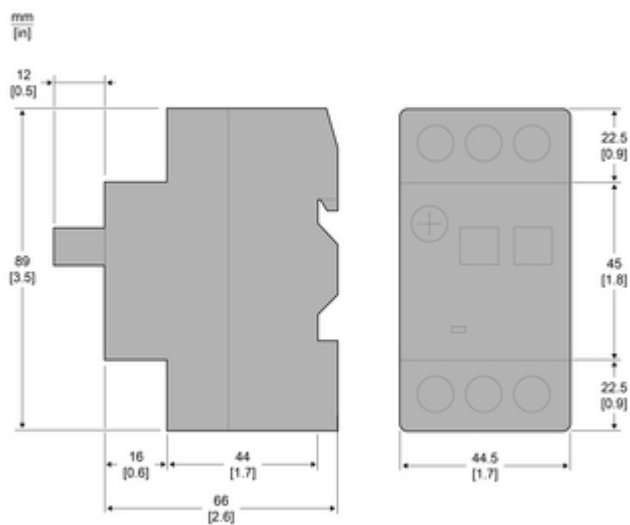

Technical Illustration

Assembly's dimensions

