



SIRIUS soft starter Values at 690 V, 40 °C standard: 313 A, 315 kW Inside-delta:
only up to 600 V 400-690 V AC, 230 V AC Screw terminals !!! Phased-out product
!!! Successor is SIRIUS 3RW5, Preferred successor type is >>3RW5545-6HA16<<

General technical data

product brand name	SIRIUS
product designation	Soft starter
product feature	
• integrated bypass contact system	Yes
• thyristors	Yes
product function	
• intrinsic device protection	Yes
• motor overload protection	Yes
• evaluation of thermistor motor protection	Yes
• external reset	Yes
• adjustable current limitation	Yes
• inside-delta circuit	Yes
product component motor brake output	Yes
insulation voltage rated value	690 V
degree of pollution	3, acc. to IEC 60947-4-2
reference code according to EN 61346-2	Q
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750	G

Power Electronics

operational current	
• at 40 °C rated value	313 A
• at 50 °C rated value	280 A
• at 60 °C rated value	250 A
operational current for 3-phase motors at inside-delta circuit	
• at 40 °C rated value	542 A
• at 50 °C rated value	485 A
• at 60 °C rated value	433 A
yielded mechanical performance for 3-phase motors	
• at 400 V	
— at standard circuit at 40 °C rated value	160 kW
— at inside-delta circuit at 40 °C rated value	315 kW
• at 500 V	
— at standard circuit at 40 °C rated value	200 kW
— at inside-delta circuit at 40 °C rated value	355 kW
• at 690 V at standard circuit at 40 °C rated value	315 kW
operating frequency rated value	50 ... 60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %

operating voltage at standard circuit rated value	400 ... 690 V
relative negative tolerance of the operating voltage at standard circuit	-15 %
relative positive tolerance of the operating voltage at standard circuit	10 %
operating voltage at inside-delta circuit rated value	400 ... 600 V
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
minimum load [%]	8 %
adjustable motor current for motor overload protection minimum rated value	62 A
continuous operating current [% of I _e] at 40 °C	115 %
power loss [W] at operational current at 40 °C during operation typical	145 W
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage frequency 1 rated value	50 Hz
control supply voltage frequency 2 rated value	60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage 1 at AC	
• at 50 Hz rated value	230 V
• at 60 Hz rated value	230 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
display version for fault signal	Display
Mechanical data	
width	210 mm
height	230 mm
depth	298 mm
fastening method	screw fixing
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
required spacing with side-by-side mounting	
• upwards	100 mm
• at the side	5 mm
• downwards	75 mm
wire length maximum	500 m
number of poles for main current circuit	3
Connections/ Terminals	
type of electrical connection	
• for main current circuit	busbar connection
• for auxiliary and control circuit	screw-type terminals
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	3
number of CO contacts for auxiliary contacts	1
type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point	
• finely stranded with core end processing	70 ... 240 mm²
• finely stranded without core end processing	70 ... 240 mm²
• stranded	95 ... 300 mm²
type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point	

• finely stranded with core end processing • finely stranded without core end processing • stranded	120 ... 185 mm ² 120 ... 185 mm ² 120 ... 240 mm ²	
type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • finely stranded with core end processing • finely stranded without core end processing • stranded	min. 2x 50 mm ² , max. 2x 185 mm ² min. 2x 50 mm ² , max. 2x 185 mm ² max. 2x 70 mm ² , max. 2x 240 mm ²	
type of connectable conductor cross-sections for AWG cables for main contacts for box terminal • using the back clamping point • using the front clamping point • using both clamping points	250 ... 500 kcmil 3/0 ... 600 kcmil min. 2x 2/0, max. 2x 500 kcmil	
type of connectable conductor cross-sections for DIN cable lug for main contacts • finely stranded • stranded	50 ... 240 mm ² 70 ... 240 mm ²	
type of connectable conductor cross-sections for auxiliary contacts • solid • finely stranded with core end processing	2x (0.5 ... 2.5 mm ²) 2x (0.5 ... 1.5 mm ²)	
type of connectable conductor cross-sections for AWG cables • for main contacts • for auxiliary contacts • for auxiliary contacts finely stranded with core end processing	2/0 ... 500 kcmil 2x (20 ... 14) 2x (20 ... 16)	
Ambient conditions		
installation altitude at height above sea level	5 000 m	
environmental category • during transport according to IEC 60721 • during storage according to IEC 60721 • during operation according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6	
ambient temperature • during operation • during storage	60 °C -25 ... +80 °C	
derating temperature	40 °C	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover	
UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor • at 460/480 V — at standard circuit at 50 °C rated value — at inside-delta circuit at 50 °C rated value • at 575/600 V — at standard circuit at 50 °C rated value — at inside-delta circuit at 50 °C rated value	200 hp 400 hp 250 hp 500 hp	
contact rating of auxiliary contacts according to UL	B300 / R300	
Approvals Certificates		
Environment	General Product Approval	
Environmental Conformations     		
EMV	Test Certificates	Maritime application



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Maritime application

other



[Confirmation](#)

[Confirmation](#)



Further information

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4445-6BC46>

Cax online generator




<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4445-6BC46>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4445-6BC46>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4445-6BC46&lang=en

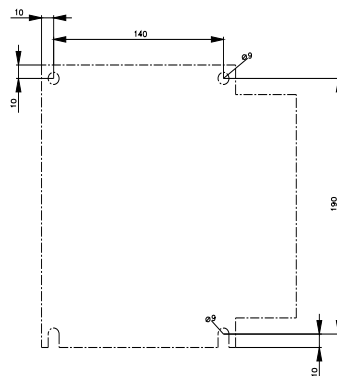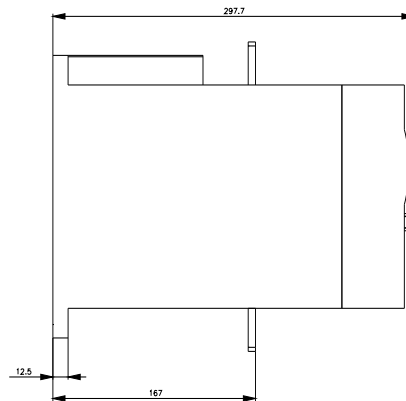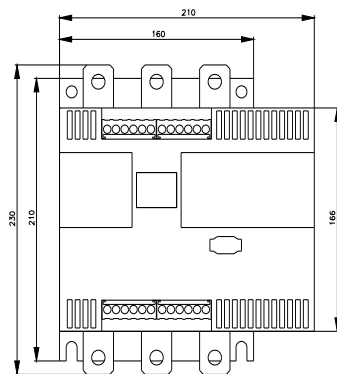

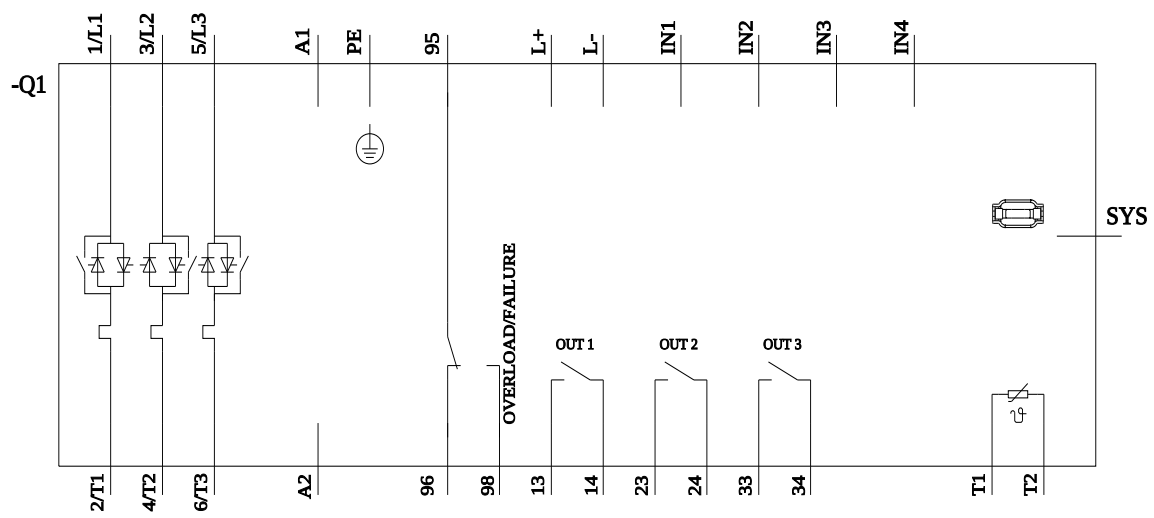

last modified:

4/1/2025