



Main

Range of product	Modicon Premium Automation platform
Product or component type	Power supply module

Complementary

Primary voltage	24...48 V DC 19.2...60 V
Input current	<= 1500 mA 48 V <= 3000 mA 24 V
Inrush current	15 A 24 V 15 A 48 V
I ² t on activation	50 A ² .s 24 V 55 A ² .s 48 V
It on activation	6 A.s 48 V 7 A.s 24 V
Protection type	Internal fuse 5 A 5 x 20 mm time-delayed primary circuit Overload protection secondary circuit Overvoltage protection secondary circuit Short-circuit protection secondary circuit
Total useful secondary power	50 W
Secondary power	19 W 24 V DC 35 W 5 V DC
Current at secondary voltage	0.8 A 24 V DC relay power supply 7 A 5 V DC
Insulation resistance	>= 10 mOhm primary/ground >= 10 mOhm primary/secondary
Marking	CE
Local signalling	1 LED green presence of voltages (OK) 1 LED red battery fault (BAT)
Module format	Double
Product weight	1.96 lb(US) (0.89 kg)

Environment

immunity to microbreaks	<= 1 ms
dielectric strength	2000 V primary/earth 2000 V primary/secondary
standards	73/23/EEC 89/336/EEC 92/31/EEC 93/68/EEC CSA C22.2 No 142 IEC 61131-2 UL 508 CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 213 Class I Division 2 Group C CSA C22.2 No 213 Class I Division 2 Group D
product certifications	ABS BV DNV GL

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

	LR RINA RMRS
ambient air temperature for operation	32...140 °F (0...60 °C)
ambient air temperature for storage	-13...158 °F (-25...70 °C)
relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
operating altitude	0...6561.68 ft (0...2000 m)
protective treatment	TC
IP degree of protection	IP20
pollution degree	2

Offer Sustainability


Not Green Premium product	Not Green Premium product
Compliant - since 0905 - Schneider Electric declaration of conformity	Compliant - since 0905 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Need no specific recycling operations	Need no specific recycling operations
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.	Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting


Dimensions of Modules and Racks

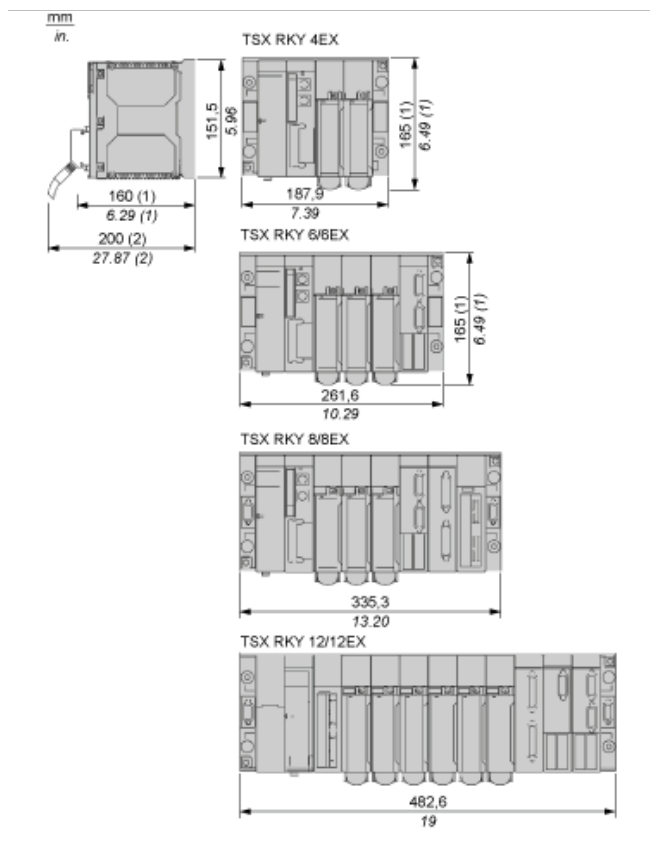

(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

Connecting Power Supply Modules

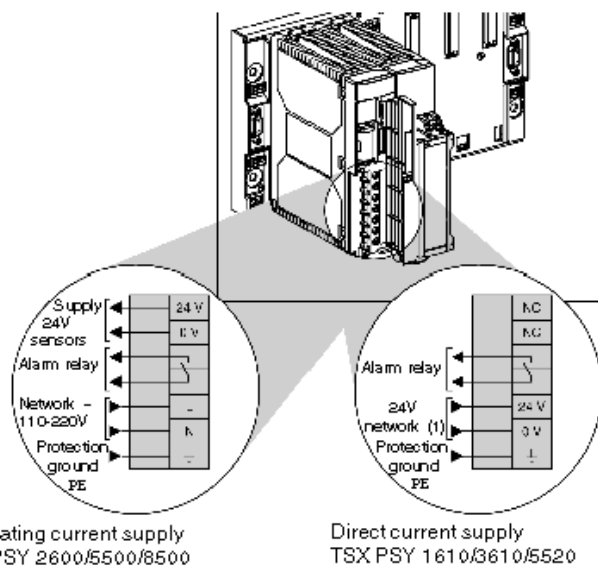

(1) 24...48Vdc for the TSXPSY5520 supply module.

Provide a protection device and a switch gear upstream of the PLC station.