



FUSELESS LOAD FEEDER REVERSING OPERATION, 400 V AC, S00 0.18 TO 0.25A 3K W, 110/120 V AC 50/60 HZ SCREW TERMINAL FOR 60 MM BUSBAR SYSTEMS TYPE OF COORDINATION 2, IQ = 150 KA (ALSO FULFILLS TYPE OF COORDINATION 1) 1NC (CONTACTOR)

|   |   |
|---|---|
| <b>product brand name</b>   | SIRIUS  |
| <b>product designation</b>  | non-fused load feeders 3RA2   |
| <b>design of the product</b>  | reversing starter   |
| <b>manufacturer's article number</b>  |   |
| <ul style="list-style-type: none"> <li>• of the supplied contactor</li> <li>• of the supplied circuit-breakers</li> <li>• of the supplied RS assembly kit</li> <li>• of the supplied busbar adapter</li> <li>• of the supplied link module</li> </ul> | <a href="#">3RT2015-1AK62</a><br><a href="#">3RV2011-0CA10</a><br><a href="#">8US1250-5AS10</a><br><a href="#">8US1251-5DS10</a><br><a href="#">3RA1921-1DA00</a> |
| <b>General technical data</b>   |   |
| <b>size of the circuit-breaker</b>  | S00   |
| <b>size of load feeder</b>  | S00   |
| product extension auxiliary switch  | Yes   |
| insulation voltage with degree of pollution 3 at AC rated value   | 690 V   |
| <b>degree of pollution</b>  | 3   |
| <b>surge voltage resistance rated value</b>   | 6 kV  |
| <b>shock resistance according to IEC 60068-2-27</b>   | 6 g / 11 ms   |
| mechanical service life (operating cycles) of contactor typical   | 30 000 000  |
| <b>type of coordination</b>   | 2   |
| <b>Substance Prohibition (day/month/year)</b>   | 10/01/2009  |
| <b>SVHC substance name</b>  | Lead CAS-No. 7439-92-1  |
| <b>Net Weight</b>   | 6.415 kg  |
| <b>Ambient conditions</b>   |   |
| <b>ambient temperature</b>  |   |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>  | -20 ... +60 °C<br>-50 ... +80 °C<br>-50 ... +80 °C  |
| <b>Main circuit</b>   |   |
| <b>number of poles for main current circuit</b>   | 3   |
| <b>design of the switching contact</b>  | electromechanical   |
| <b>adjustable current response value current of the current-dependent overload release</b>  | 0.18 ... 0.25 A   |
| <b>operating voltage</b>  |   |
| <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> </ul>  | 690 V<br>690 V  |
| <b>operating frequency rated value</b>  | 50 ... 60 Hz  |
| operational current at AC-3 at 400 V rated value  | 0.2 A   |
| operating power at AC-3   |   |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>  | 60 W  |

|  |  |                                       |
|--|--|---------------------------------------|
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>   | 90 W<br>90 W   |                                       |
| <b>Control circuit/ Control</b>  |  |                                       |
| <b>control supply voltage at AC</b>  |  |                                       |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>   | 110 V<br>120 V   |                                       |
| <b>apparent holding power of magnet coil at AC</b>   | 4.2 VA   |                                       |
| <b>Protective and monitoring functions</b>   |  |                                       |
| <b>trip class</b>  | CLASS 10   |                                       |
| <b>design of the overload release</b>  | thermal (bimetallic)   |                                       |
| response value current of instantaneous short-circuit trip unit  | 3.25 A   |                                       |
| <b>Short-circuit protection</b>  |  |                                       |
| <b>product function short circuit protection</b>   | Yes  |                                       |
| <b>design of the short-circuit trip</b>  | magnetic   |                                       |
| <b>conditional short-circuit current (I<sub>q</sub>)</b>   |  |                                       |
| <ul style="list-style-type: none"> <li>• at 690 V according to IEC 60947-4-1 rated value</li> <li>• at 400 V according to IEC 60947-4-1 rated value</li> <li>• at 500 V according to IEC 60947-4-1 rated value</li> </ul>  | 100 000 A<br>153 000 A<br>100 000 A  |                                       |
| <b>Installation/ mounting/ dimensions</b>  |  |                                       |
| <b>mounting position</b>   | vertical   |                                       |
| <b>fastening method</b>  | for snapping onto 60 mm busbar systems   |                                       |
| <b>height</b>  | 200 mm   |                                       |
| <b>width</b>   | 90 mm  |                                       |
| <b>depth</b>   | 155 mm   |                                       |
| <b>required spacing</b>  |  |                                       |
| <ul style="list-style-type: none"> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 0 mm<br>0 mm<br>20 mm<br>9 mm<br>10 mm<br><br>0 mm<br>0 mm<br>20 mm<br>10 mm<br>9 mm |                                       |
| <b>Connections/ Terminals</b>  |  |                                       |
| type of electrical connection for main current circuit   | screw-type terminals   |                                       |
| type of connectable conductor cross-sections for main contacts stranded  | 0.5 ... 4 mm <sup>2</sup> , 2x (0.75 ... 2.5 mm <sup>2</sup> )                       |                                       |
| connectable conductor cross-section for main contacts finely stranded with core end processing   | 0.5 ... 2.5 mm <sup>2</sup>  |                                       |
| <b>Safety related data</b>   |  |                                       |
| proportion of dangerous failures with high demand rate according to SN 31920   | 73 %   |                                       |
| <b>B10 value with high demand rate according to SN 31920</b>   | 1 000 000  |                                       |
| <b>Electrical Safety</b>   |  |                                       |
| <b>protection class IP on the front according to IEC 60529</b>   | IP20   |                                       |
| <b>touch protection on the front according to IEC 60529</b>  | finger-safe, for vertical contact from the front                                     |                                       |
| <b>Approvals Certificates</b>  |  |                                       |
| <b>Environment</b>   | <b>General Product Approval</b>  | <b>For use in hazardous locations</b> |

[Environmental Confirmations](#)



Test Certificates

Maritime application

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



#### Maritime application

other



[Confirmation](#)

[Confirmation](#)



#### Railway

[Special Test Certificate](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2210-0CD15-2AK6>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-0CD15-2AK6>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2210-0CD15-2AK6&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2210-0CD15-2AK6&lang=en)

##### Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2210-0CD15-2AK6>

##### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

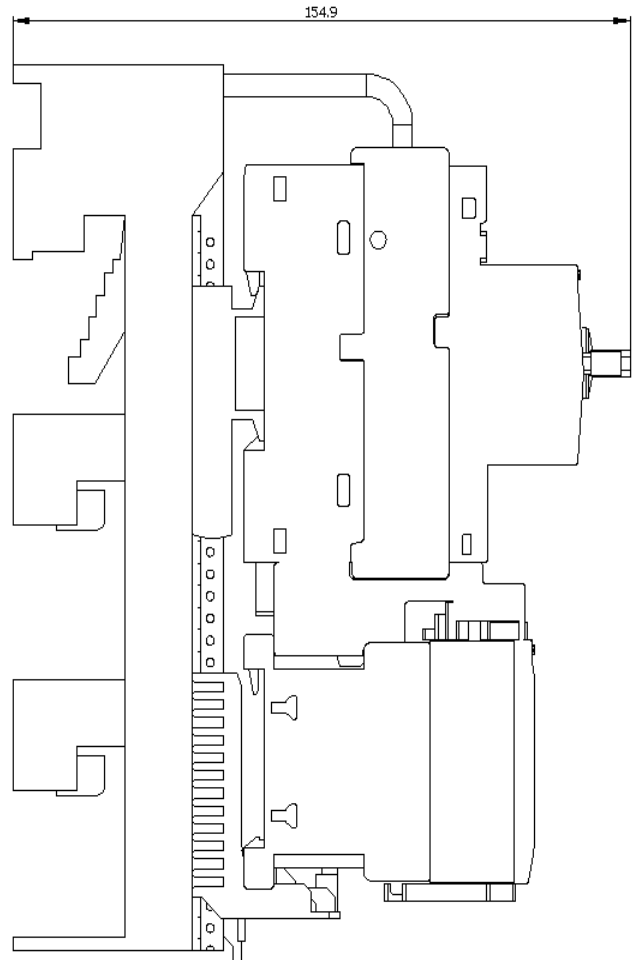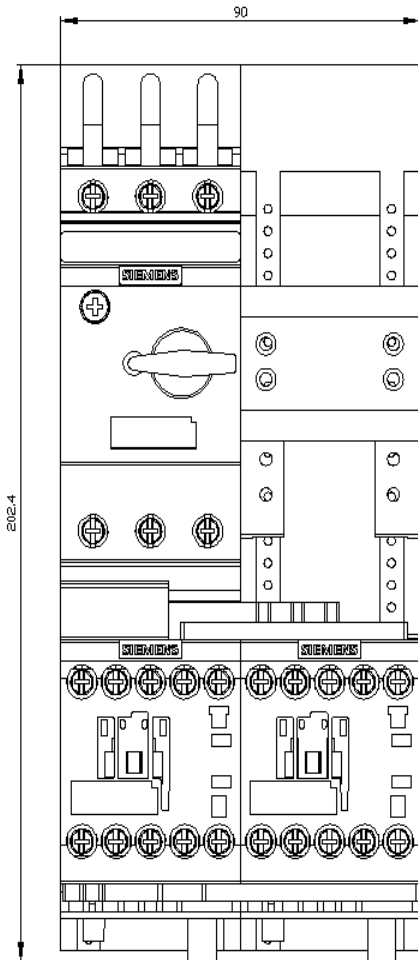





last modified:

5/7/2026 