

wire connector TA2.7 6 x 14 AWG...2 AWG for 6 cables 3 units; incl. terminal cover extended with holes for voltage testing; accessory for: 3VA53/54; 3VA63/64 plug-in socket/withdrawable socket 3VA53/54; 3VA63/64

Model	
product brand name	SENTRON
product designation	Circular conductor terminal 6 cables 3 units
design of the product	Connection method
accessories	Wire connector
General technical data	
designation / of the terminal	TA2.7
type of electrical connection / with control wire tap	No
Mechanical Design	
Net Weight	658 g
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum 	1.5 mm ² 35 mm ²
stripped length	18 / 34,5 mm
tightening torque / when using copper cables	
<ul style="list-style-type: none"> solid stranded finely stranded finely stranded / with core end processing 	1.5 mm ² : 2.8 Nm, 2.5-10 mm ² : 6.2 Nm, 16 mm ² : 7 Nm 1.5 mm ² : 2.8 Nm; 2.5 - 10 mm ² : 6.2 Nm; 16 - 35 mm ² : 7 Nm 1.5 mm ² : 2.8 Nm, 2.5 - 10 mm ² : 6.2 Nm, 16 - 25 mm ² : 7 Nm 1.5 mm ² : 2.8 Nm, 2.5 - 10 mm ² : 6.2 Nm, 16 - 25 mm ² : 7 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	0.7 / 1.35 in
connectable conductor cross-section	
<ul style="list-style-type: none"> for copper cable / solid / minimum for copper cable / solid / maximum for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	14 AWG 10 AWG 14 AWG 2 AWG 8 AWG 2 AWG
tightening torque / when using copper cables	
<ul style="list-style-type: none"> solid stranded 	14-10 AWG: 55 lb-in 14 - 8 AWG: 55 lb-in; 6 - 2 AWG: 62 lb-in
Certificates	
General Product Approval	EMV

[Miscellaneous](#)



[Confirmation](#)



Test Certificates

Maritime application

other

Environment

[Type Test Certificates/Test Report](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

LRS

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9373-0JF68>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9373-0JF68>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9373-0JF68

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

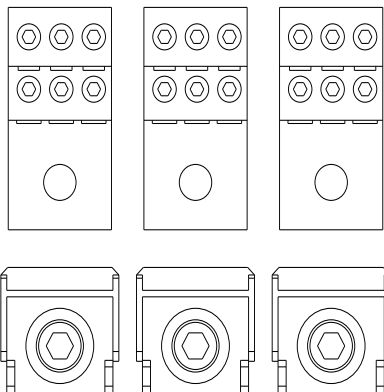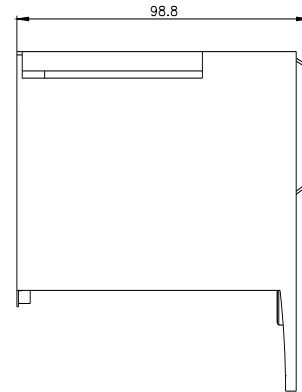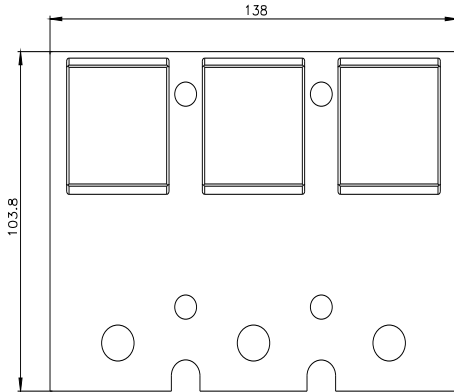

last modified:

4/6/2026