


# Product data sheet

Specifications

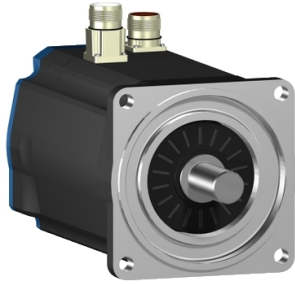

servo motor BSH, Lexium 05,  
7.8N.m, 2500rpm, 100mm,  
untapped shaft, Sincos single turn,  
without brake, IP65, straight

BSH1003P21A1A

! Discontinued

! Discontinued on: Jun 30, 2023

## Main

Device short name	BSH
Product or component type	Servo motor
Maximum mechanical speed	6000 rpm
Continuous stall torque	<p>70.8 lbf.in (8 N.m) LXM32.D30N4 10 A, 400 V, three phase</p> <p>70.8 lbf.in (8 N.m) LXM32.D30N4 10 A, 480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05CD28M2, 200...240 V, single phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05AD28M2, 200...240 V, single phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05BD28M2, 200...240 V, single phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05BD34N4, 380...480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05BD42M3X, 200...240 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05CD34N4, 380...480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05CD42M3X, 200...240 V, three phase</p> <p>59.3 lbf.in (6.7 N.m) LXM15LD21M3, 230 V, three phase</p> <p>59.3 lbf.in (6.7 N.m) LXM15LD17N4, 230 V, three phase</p> <p>59.3 lbf.in (6.7 N.m) LXM15LD17N4 10 A, 400 V, three phase</p> <p>59.3 lbf.in (6.7 N.m) LXM15LD17N4, 480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM15LD28M3, 230 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM15MD28N4, 400 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM15MD28N4, 480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM15MD40N4, 400 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM15MD40N4, 480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05AD34N4, 380...480 V, three phase</p> <p>69.04 lbf.in (7.8 N.m) LXM05AD42M3X, 200...240 V, three phase</p>
Peak stall torque	<p>250.5 lbf.in (28.3 N.m) LXM32.D30N4 10 A, 400 V, three phase</p> <p>250.5 lbf.in (28.3 N.m) LXM32.D30N4 10 A, 480 V, three phase</p> <p>174.27 lbf.in (19.69 N.m) LXM05AD28M2, 200...240 V, single phase</p> <p>174.27 lbf.in (19.69 N.m) LXM05BD28M2, 200...240 V, single phase</p> <p>174.27 lbf.in (19.69 N.m) LXM05CD28M2, 200...240 V, single phase</p> <p>137.2 lbf.in (15.5 N.m) LXM15LD21M3, 230 V, three phase</p> <p>110.6 lbf.in (12.5 N.m) LXM15LD17N4, 230 V, three phase</p> <p>110.6 lbf.in (12.5 N.m) LXM15LD17N4, 400 V, three phase</p> <p>110.6 lbf.in (12.5 N.m) LXM15LD17N4, 480 V, three phase</p> <p>174.27 lbf.in (19.69 N.m) LXM15LD28M3, 230 V, three phase</p> <p>174.27 lbf.in (19.69 N.m) LXM15MD28N4, 400 V, three phase</p> <p>174.27 lbf.in (19.69 N.m) LXM15MD28N4 10 A, 480 V, three phase</p> <p>205.07 lbf.in (23.17 N.m) LXM15MD40N4, 400 V, three phase</p> <p>205.07 lbf.in (23.17 N.m) LXM15MD40N4, 480 V, three phase</p> <p>203.66 lbf.in (23.01 N.m) LXM05AD34N4, 380...480 V, three phase</p> <p>205.07 lbf.in (23.17 N.m) LXM05AD42M3X, 200...240 V, three phase</p> <p>203.66 lbf.in (23.01 N.m) LXM05BD34N4, 380...480 V, three phase</p> <p>205.07 lbf.in (23.17 N.m) LXM05BD42M3X, 200...240 V, three phase</p> <p>203.66 lbf.in (23.01 N.m) LXM05CD34N4, 380...480 V, three phase</p> <p>205.07 lbf.in (23.17 N.m) LXM05CD42M3X, 200...240 V, three phase</p>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

---

<b>Nominal output power</b>	2000 W LXM32.D30N4 10 A, 400 V, three phase
	2600 W LXM32.D30N4 10 A, 480 V, three phase
	1100 W LXM05AD28M2, 200...240 V, single phase
	1100 W LXM05BD28M2, 200...240 V, single phase
	1100 W LXM05CD28M2, 200...240 V, single phase
	1100 W LXM05AD42M3X, 200...240 V, three phase
	1100 W LXM05BD42M3X, 200...240 V, three phase
	1100 W LXM05CD42M3X, 200...240 V, three phase
	1300 W LXM15LD28M3, 230 V, three phase
	1700 W LXM15LD17N4, 230 V, three phase
	1700 W LXM15LD21M3, 230 V, three phase
	1800 W LXM05AD34N4 10 A, 380...480 V, three phase
	1800 W LXM05BD34N4, 380...480 V, three phase
	1800 W LXM05CD34N4, 380...480 V, three phase
	2000 W LXM15MD28N4, 400 V, three phase
	2000 W LXM15MD40N4, 400 V, three phase
	2200 W LXM15LD17N4, 400 V, three phase
	2200 W LXM15MD28N4, 480 V, three phase
	2200 W LXM15MD40N4, 480 V, three phase
	2300 W LXM15LD17N4, 480 V, three phase

---

<b>Nominal torque</b>	55.8 lbf.in (6.3 N.m) LXM32.D30N4 10 A, 400 V, three phase
	55.8 lbf.in (6.3 N.m) LXM32.D30N4 10 A, 480 V, three phase
	32.7 lbf.in (3.7 N.m) LXM15LD17N4, 480 V, three phase
	59.57 lbf.in (6.73 N.m) LXM05AD28M2, 200...240 V, single phase
	59.57 lbf.in (6.73 N.m) LXM05BD28M2, 200...240 V, single phase
	59.57 lbf.in (6.73 N.m) LXM05CD28M2, 200...240 V, single phase
	40.7 lbf.in (4.6 N.m) LXM15MD28N4, 480 V, three phase
	40.7 lbf.in (4.6 N.m) LXM15MD40N4, 480 V, three phase
	41.6 lbf.in (4.7 N.m) LXM15LD17N4, 400 V, three phase
	44.3 lbf.in (5 N.m) LXM15MD28N4, 400 V, three phase
	44.3 lbf.in (5 N.m) LXM15MD40N4, 400 V, three phase
	50.4 lbf.in (5.7 N.m) LXM05AD34N4 10 A, 380...480 V, three phase
	50.4 lbf.in (5.7 N.m) LXM05BD34N4, 380...480 V, three phase
	50.4 lbf.in (5.7 N.m) LXM05CD34N4, 380...480 V, three phase
	53.1 lbf.in (6 N.m) LXM15LD17N4, 230 V, three phase
	53.1 lbf.in (6 N.m) LXM15LD21M3, 230 V, three phase
	55.8 lbf.in (6.3 N.m) LXM15LD28M3, 230 V, three phase
	59.57 lbf.in (6.73 N.m) LXM05AD42M3X, 200...240 V, three phase
	59.57 lbf.in (6.73 N.m) LXM05BD42M3X, 200...240 V, three phase
	59.57 lbf.in (6.73 N.m) LXM05CD42M3X, 200...240 V, three phase

---

<b>Nominal speed</b>	3000 rpm LXM32.D30N4 10 A, 400 V, three phase
	4000 rpm LXM32.D30N4 10 A, 480 V, three phase
	4500 rpm LXM15LD17N4, 400 V, three phase
	6000 rpm LXM15LD17N4, 480 V, three phase
	1500 rpm LXM05AD28M2, 200...240 V, single phase
	1500 rpm LXM05BD28M2, 200...240 V, single phase
	1500 rpm LXM05CD28M2, 200...240 V, single phase
	1500 rpm LXM05AD42M3X, 200...240 V, three phase
	1500 rpm LXM05BD42M3X, 200...240 V, three phase
	1500 rpm LXM05CD42M3X, 200...240 V, three phase
	2000 rpm LXM15LD28M3, 230 V, three phase
	2500 rpm LXM15LD17N4 10 A, 230 V, three phase
	2500 rpm LXM15LD21M3, 230 V, three phase
	3000 rpm LXM05AD34N4, 380...480 V, three phase
	3000 rpm LXM05BD34N4, 380...480 V, three phase
	3000 rpm LXM05CD34N4, 380...480 V, three phase
	4000 rpm LXM15MD28N4, 400 V, three phase
	4000 rpm LXM15MD40N4, 400 V, three phase
	4500 rpm LXM15MD28N4, 480 V, three phase
	4500 rpm LXM15MD40N4, 480 V, three phase

<b>Product compatibility</b>	LXM05AD28M2 200...240 V single phase LXM05BD28M2 200...240 V single phase LXM05CD28M2 200...240 V single phase LXM15LD21M3 230 V three phase LXM05AD42M3X 200...240 V three phase LXM05BD42M3X 200...240 V three phase LXM05CD42M3X 200...240 V three phase LXM15LD17N4 230 V three phase LXM15LD17N4 400 V three phase LXM15LD17N4 480 V three phase LXM15LD28M3 230 V three phase LXM05AD34N4 380...480 V three phase LXM05BD34N4 380...480 V three phase LXM05CD34N4 380...480 V three phase LXM15MD28N4 400 V three phase LXM15MD28N4 480 V three phase LXM15MD40N4 400 V three phase LXM15MD40N4 480 V three phase LXM32.D30N4 400 V three phase LXM32.D30N4 480 V three phase
<b>Shaft end</b>	Untapped
<b>IP degree of protection</b>	IP65 standard IP67 with IP67 kit
<b>Speed feedback resolution</b>	131072 points/turn
<b>Holding brake</b>	Without
<b>Mounting support</b>	International standard flange
<b>Electrical connection</b>	Straight connectors

## Complementary

<b>Range compatibility</b>	Lexium 32 Lexium 15 Lexium 05
<b>supply voltage max</b>	480 V
<b>Network number of phases</b>	Three phase
<b>Continuous stall current</b>	6.6 A
<b>maximum continuous power</b>	3.14 W
<b>Maximum current Irms</b>	28.3 A LXM15LD21M3 28.3 A LXM15LD28M3 28.3 A LXM15LD17N4 28.3 A LXM15MD28N4 28.3 A LXM15MD40N4 28.3 A LXM05AD28M2 28.3 A LXM05AD42M3X 28.3 A LXM05AD34N4 28.3 A LXM05BD28M2 28.3 A LXM05BD42M3X 28.3 A LXM05BD34N4 28.3 A LXM05CD28M2 28.3 A LXM05CD42M3X 28.3 A LXM05CD34N4 28.3 A LXM32.D30N4
<b>Maximum permanent current</b>	28.3 A
<b>Switching frequency</b>	8 kHz
<b>Second shaft</b>	Without second shaft end
<b>Shaft diameter</b>	0.7 in (19 mm)
<b>Shaft length</b>	1.6 in (40 mm)
<b>Feedback type</b>	Single turn SinCos Hiperface
<b>Motor flange size</b>	3.9 in (100 mm)
<b>Number of motor stacks</b>	3

<b>Torque constant</b>	1.22 N.m/A 248 °F (120 °C)
<b>Back emf constant</b>	77 V/krpm 248 °F (120 °C)
<b>Number of motor poles</b>	8
<b>Rotor inertia</b>	3.22 kg.cm <sup>2</sup>
<b>Stator resistance</b>	1.43 Ohm 68 °F (20 °C)
<b>Stator inductance</b>	8.8 mH 68 °F (20 °C)
<b>Stator electrical time constant</b>	6.15 ms 68 °F (20 °C)
<b>Maximum radial force Fr</b>	1050 N 1000 rpm 660 N 4000 rpm 730 N 3000 rpm 830 N 2000 rpm
<b>Maximum axial force Fa</b>	0.2 x Fr
<b>Type of cooling</b>	Natural convection
<b>Length</b>	9.5 in (240.5 mm)
<b>Centring collar diameter</b>	3.7 in (95 mm)
<b>Centring collar depth</b>	0.1 in (3.5 mm)
<b>Number of mounting holes</b>	4
<b>Mounting holes diameter</b>	0.4 in (9 mm)
<b>Circle diameter of the mounting holes</b>	4.5 in (115 mm)
<b>Net weight</b>	16.3 lb(US) (7.4 kg)
<b>Sizing reference</b>	BSH1003P
<b>Network number of phases</b>	3
<b>Accuracy error [angular]</b>	1.4 °
<b>Temperature copper hot</b>	248 °F (120 °C)
<b>Temperature magnet hot</b>	212 °F (100 °C)
<b>Temperature magnet rt</b>	68 °F (20 °C)

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.06 in (15.4 cm)
<b>Package 1 Width</b>	6.4 in (16.3 cm)
<b>Package 1 Length</b>	16.02 in (40.7 cm)
<b>Package 1 Weight</b>	16.5 lb(US) (7.5 kg)

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better



#### Materials and Substances

EU RoHS Directive

[Compliant By Exemption](#)

PVC free

Yes

### Use Longer



#### Lifetime extension

Repair

No

### Use Again



#### Repack and remanufacture

Circularity Profile

No need of specific recycling operations

WEEE Label




The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

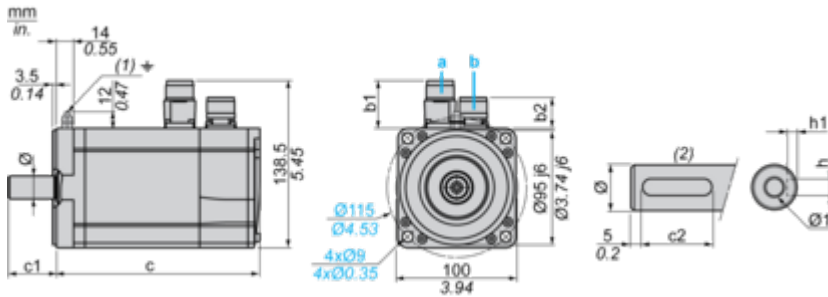

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2								
39.5	25.5	39.5	39.5	241	272	40	30	6 N9	3.5 <sup>+0.1</sup> <sub>0</sub>	19 k6	M6 x 16

Dimensions in in.

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2								
1.55	1.00	1.55	1.55	9.48	10.70	1.57	1.18	0.24 N9	0.14 <sup>+0.1</sup> <sub>0</sub>	0.75 k6	M6 x 0.63


Performance Curves

400 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive

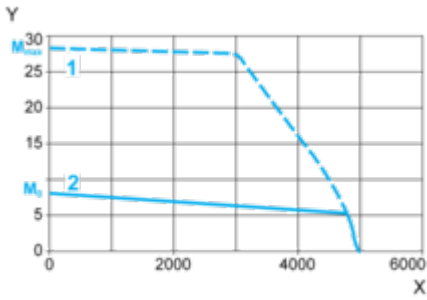

X Speed in rpm

Y Torque in Nm

1 Peak torque


2 Continuous torque

480 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive

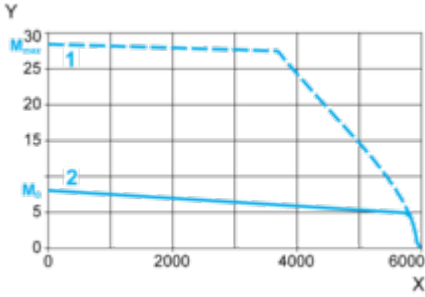

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque