

Product datasheet

Specifications



Reversing Contactor, TeSys Deca,
3P(3NO), AC-3, <=440V 115A,
230V AC 50/60Hz coil, screw clamp
terminals

LC2D115P7

⚠ To be discontinued

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)


[How we assess product sustainability >](#)

Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Dimensions

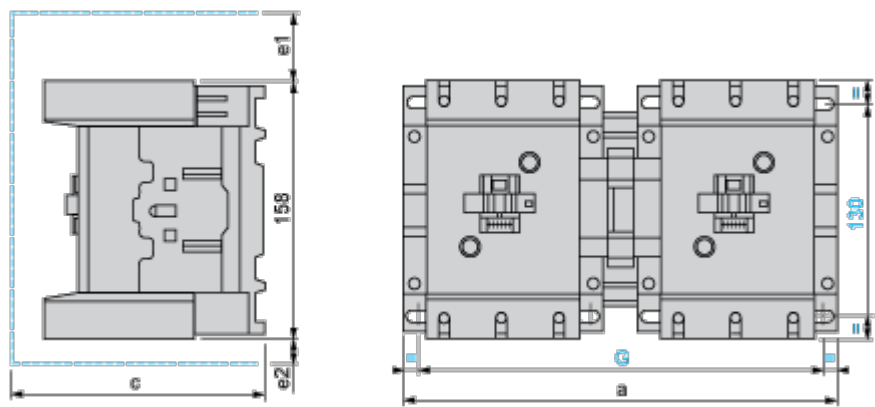

LC2 or 2 x LC1	a	c	e1	e2	G
D115 and D150	266	148	56	18	242/256
c, e1 and e2: including cabling.					

Connections and Schema

Wiring

