

Siemens  
EcoTech



digitally adjustable monitoring relay phase failure, phase sequence, asymmetry, frequency, overvoltage and undervoltage monitoring, with/without N conductor with phase sequence correction 3x 90-690 V AC, 15-70 Hz 2 changeover contacts spring-loaded terminal

|  |  |
|--|--|
| product brand name   | SIRIUS   |
| product designation  | Network monitoring relay with digital setting  |
| design of the product  | automatic correction of direction of rotation in case of wrong phase sequence, monitoring of phase failure, phase asymmetry, N conductor (adjustable), frequency, undervoltage and overvoltage |
| product type designation   | 3UG5   |
| <b>General technical data</b>  |  |
| product function   | line monitoring  |
| display version LED  | No   |
| design of the display  | LCD  |
| power loss [W] maximum   | 2 W  |
| power loss [V·A] maximum   | 5.1 VA   |
| insulation voltage for overvoltage category III according to IEC 60664 |  |
| • with degree of pollution 2 rated value                               | 690 V  |
| • with degree of pollution 3 rated value                               | 690 V  |
| degree of pollution  | 3  |
| type of voltage  |  |
| • for monitoring   | AC   |
| • of the operating voltage for actuation                               | AC/DC  |
| surge voltage resistance rated value                                   | 6 kV   |
| shock resistance according to IEC 60068-2-27                           | sinusoidal half-wave 15g / 11 ms   |
| vibration resistance according to IEC 60068-2-6                        | 10 ... 55 Hz: 0.35 mm  |
| switching behavior   | monostable   |
| mechanical service life (operating cycles) typical                     | 10 000 000   |
| electrical endurance (operating cycles) at AC-15 at 230 V typical      | 100 000  |
| thermal current of the switching element with contacts maximum         | 5 A  |
| adjustable OFF-delay time  | 0.1 ... 30 s   |
| reference code according to IEC 81346-2                                | K  |
| relative repeat accuracy   | 0.4 %  |
| Substance Prohibitance (Date)  | 06/01/2023   |
| SVHC substance name  | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1  |
| Net Weight   | 0.165 kg   |
| <b>Product Function</b>  |  |
| product function   |  |

|   |                               |
|---|-------------------------------|
| • undervoltage detection  | Yes                           |
| • overvoltage detection   | Yes                           |
| • phase sequence recognition  | Yes                           |
| • phase failure detection   | Yes                           |
| • asymmetry detection   | Yes                           |
| • overvoltage detection 3 phase   | Yes                           |
| • undervoltage detection 3 phases   | Yes                           |
| • voltage window recognition 3 phase  | Yes                           |
| • adjustable open/closed-circuit current principle                              | Yes                           |
| • auto-RESET  | Yes                           |
| • neutral conductor monitoring adjustable                                       | Yes                           |
| suitability for use safety-related circuits                                     | No                            |
| <b>Control circuit/ Control</b>   |                               |
| <b>type of voltage of the control supply voltage</b>                            | AC                            |
| <b>control supply voltage 1 at AC</b>   |                               |
| • at 50 Hz  | 200 ... 690 V                 |
| • at 60 Hz  | 200 ... 690 V                 |
| <b>control supply voltage 2 at AC</b>   |                               |
| • at 50 Hz  | 120 ... 400 V                 |
| • at 60 Hz  | 120 ... 400 V                 |
| <b>operating range factor control supply voltage rated value at AC at 50 Hz</b> |                               |
| • initial value   | 0.85                          |
| • full-scale value  | 1.1                           |
| <b>operating range factor control supply voltage rated value at AC at 60 Hz</b> |                               |
| • initial value   | 0.85                          |
| • full-scale value  | 1.1                           |
| <b>Supply voltage</b>   |                               |
| supply voltage frequency rated value  | 70 ... 15 Hz                  |
| <b>Interfaces</b>   |                               |
| design of the interface bluetooth   | No                            |
| <b>Measuring circuit</b>  |                               |
| <b>measurable voltage 1 at AC</b>   | 160 ... 760 V                 |
| <b>measurable voltage 2 at AC</b>   | 90 ... 440 V                  |
| <b>adjustable operating delay time initial value</b>                            | 0 s                           |
| <b>adjustable response delay time</b>   |                               |
| • when starting   | 0.1 ... 999.9 s               |
| • with lower or upper limit violation   | 0.1 ... 30 s                  |
| <b>buffering time in the event of power failure minimum</b>                     | 20 ms                         |
| <b>response time maximum</b>  | 500 ms                        |
| <b>accuracy of digital display</b>  | +/-1 digit                    |
| <b>relative temperature-related measurement deviation</b>                       | 1 %                           |
| <b>Precision</b>  |                               |
| <b>relative metering precision</b>  | 3 %                           |
| <b>temperature drift per °C</b>   | 0.001 %/°C                    |
| <b>Short-circuit protection</b>   |                               |
| <b>design of the fuse link</b>  |                               |
| • for short-circuit protection of the NO contacts of the relay outputs required | gL/gG: 6 A or MCB type C: 1 A |
| • for short circuit protection of the NC contacts of the relay outputs required | gL/gG: 6 A or MCB type C: 1 A |
| <b>Communication/ Protocol</b>  |                               |
| protocol is supported IO-Link protocol  | No                            |
| <b>type of voltage supply via input/output link master</b>                      | No                            |
| <b>Auxiliary circuit</b>  |                               |
| <b>material of switching contacts</b>   | AgSnO2                        |
| number of NC contacts delayed switching   | 0                             |
| number of NO contacts delayed switching   | 0                             |
| <b>number of CO contacts</b>  |                               |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>  | 2  |
| <ul style="list-style-type: none"> <li>• delayed switching</li> </ul>   | 2  |
| <b>operating frequency with 3RT2 contactor maximum</b>  | 5 000 1/h  |
| <b>contact reliability of auxiliary contacts</b>  | one incorrect switching operation of 100 million switching operations (17 V, 5 mA)   |
| <b>contact rating of auxiliary contacts according to UL</b>   | R300 / B300  |
| <b>Main circuit</b>   |  |
| <b>number of poles for main current circuit</b>   | 4  |
| <b>ampacity of the output relay at AC-15</b>  |  |
| <ul style="list-style-type: none"> <li>• at 250 V at 50/60 Hz</li> </ul>  | 3 A  |
| <b>ampacity of the output relay at DC-13</b>  |  |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 110 V</li> <li>• at 125 V</li> <li>• at 230 V</li> <li>• at 250 V</li> </ul>   | 1 A<br>0.2 A<br>0.2 A<br>0.1 A<br>0.1 A  |
| <b>operational current at 17 V minimum</b>  | 5 mA   |
| <b>continuous current of the DIAZED fuse link of the output relay</b>   | 6 A  |
| <b>Electromagnetic compatibility</b>  |  |
| EMC emitted interference according to IEC 60947-1   | class A  |
| <b>conducted interference</b>   |  |
| <ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>   | 2 kV (power ports), 2 kV (signal ports)<br>2 kV<br>1 kV  |
| <b>field-based interference according to IEC 61000-4-3</b>  | 10 V/m   |
| <b>electrostatic discharge according to IEC 61000-4-2</b>   | 6 kV contact discharge / 8 kV air discharge  |
| <b>Galvanic isolation</b>   |  |
| <b>design of the electrical isolation</b>   | galvanic isolation   |
| <b>galvanic isolation</b>   |  |
| <ul style="list-style-type: none"> <li>• between input and output</li> <li>• between the outputs</li> <li>• between the voltage supply and other circuits</li> </ul>  | Yes<br>Yes<br>Yes  |
| <b>Electrical Safety</b>  |  |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20   |
| <b>Connections/ Terminals</b>   |  |
| <b>product component removable terminal for main circuit</b>  | Yes  |
| <b>product component removable terminal for auxiliary and control circuit</b>   | Yes  |
| <b>type of electrical connection</b>  | spring-loaded terminal (push-in)   |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> <li>• for AWG cables solid</li> <li>• for AWG cables stranded</li> </ul> | 1x (0.5 ... 4 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> )<br>0.5 ... 4 mm <sup>2</sup><br>1x (20 ... 12)<br>20 ... 12 |
| <b>connectable conductor cross-section</b>  |  |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>  | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.25 ... 1.5 mm <sup>2</sup>   |
| <b>AWG number as coded connectable conductor cross section</b>  |  |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>   | 24 ... 12<br>20 ... 12   |
| <b>stripped length</b>  | 10 mm  |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | any  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail   |
| <b>height</b>   | 100 mm   |

|   |         |
|---|---------|
| <b>width</b>  | 22.5 mm |
| <b>depth</b>  | 90 mm   |
| <b>required spacing</b>   |         |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards 0 mm</li> <li>— backwards 0 mm</li> <li>— upwards 0 mm</li> <li>— downwards 0 mm</li> <li>— at the side 0 mm</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards 0 mm</li> <li>— backwards 0 mm</li> <li>— upwards 0 mm</li> <li>— at the side 0 mm</li> <li>— downwards 0 mm</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards 0 mm</li> <li>— backwards 0 mm</li> <li>— upwards 0 mm</li> <li>— downwards 0 mm</li> <li>— at the side 0 mm</li> </ul> </li> </ul> |         |

#### Ambient conditions

|   |         |
|---|---------|
| installation altitude at height above sea level maximum   | 2 000 m |
| <b>ambient temperature</b>  |         |
| <ul style="list-style-type: none"> <li>• during operation -25 ... +60 °C</li> <li>• during storage -40 ... +85 °C</li> <li>• during transport -40 ... +85 °C</li> </ul> |         |
| relative humidity during operation maximum  | 70 %    |

#### Environmental footprint

|  |           |
|--|-----------|
| Environmental Product Declaration(EPD)                 | Yes       |
| global warming potential [CO2 eq] total                | 17.3 kg   |
| global warming potential [CO2 eq] during manufacturing | 5.06 kg   |
| global warming potential [CO2 eq] during operation     | 12.3 kg   |
| global warming potential [CO2 eq] after end of life    | -0.132 kg |

#### Approvals Certificates

|                                 |            |                          |
|---------------------------------|------------|--------------------------|
| <b>General Product Approval</b> | <b>EMV</b> | <b>Test Certificates</b> |
|---------------------------------|------------|--------------------------|



[Type Test Certificates/Test Report](#)

#### other Environment

[Confirmation](#)



[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>



Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG5618-2CR20>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG5618-2CR20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

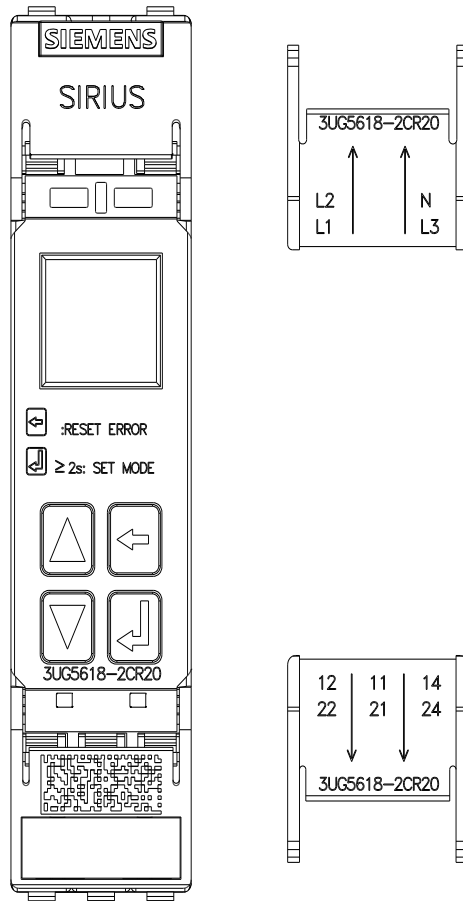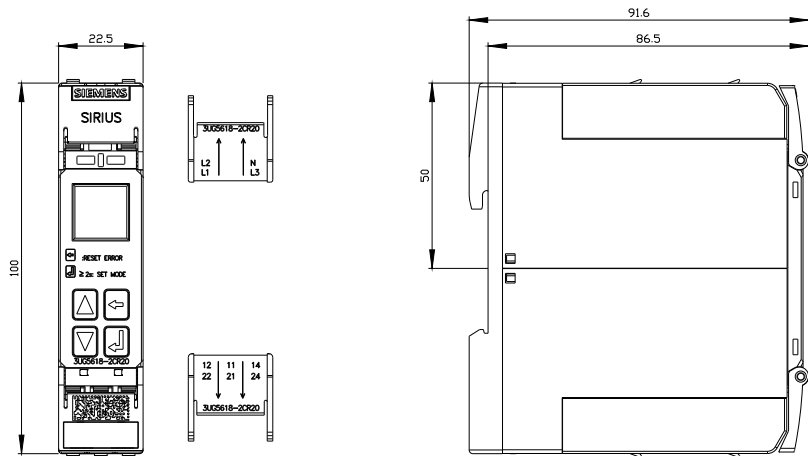

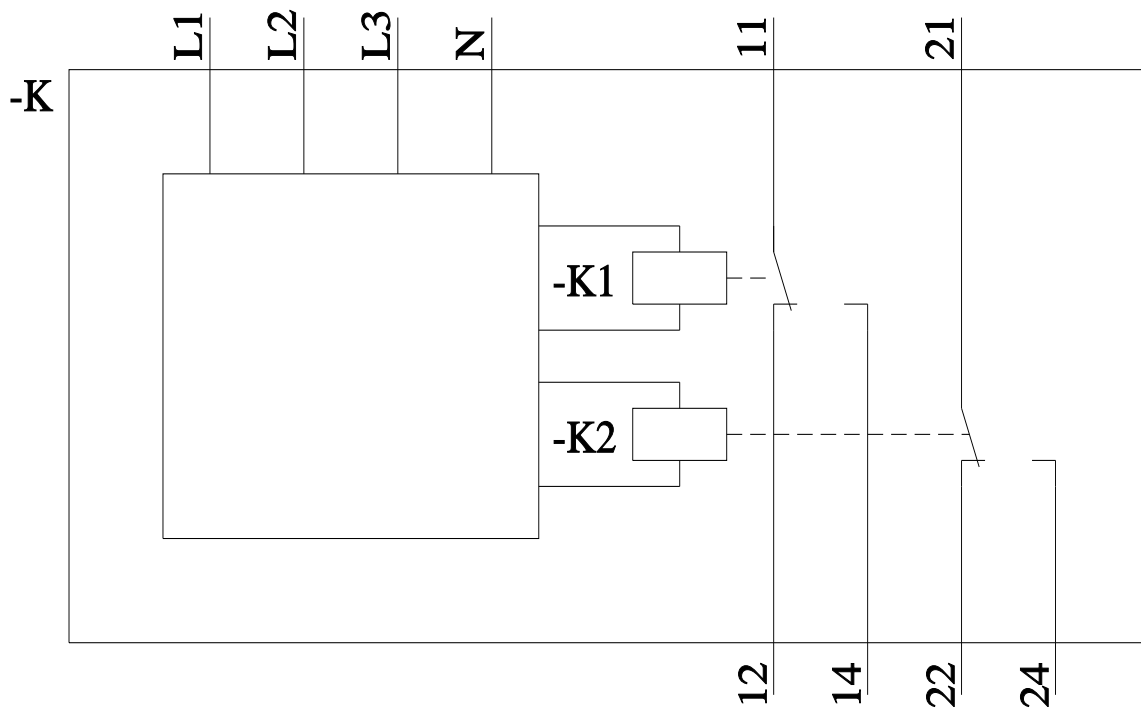

last modified:

10/27/2025 