

Product data sheet

Specifications



body for switch - 1 pole - 30° - 20 A -
for Ø 22 mm

K2B004T

⚠ Discontinued on: Jan 29, 2021

⚠ Discontinued

Main

Range of Product	Harmony K
Product or Component Type	Cam switch body
Component name	K2
[Ith] conventional free air thermal current	20 A
Sub-assembly composition	Contact blocks + fixing plate
Cam switch function	OFF-ON switch
Return	Spring return from 30° to 0° Spring return from 330° to 0°
Off position	With Off position
Poles description	1P
Switching positions	Right: 0° - 30° Left: 0° - 330°
Product mounting	Front mounting
Fixing Mode	Ø 22 mm hole
Bezel material	Plastic

Complementary

Switching angle	30 °
[Ui] rated insulation voltage	690 V 3)IEC 60947-1
[Ithe] conventional enclosed thermal current	16 A
Rated operational power in W	1300 W AC-3, 230 V 1 phase IEC 947-3 14000 W AC-21, 400 V 3 phase IEC 947-3 17000 W AC-21, 500 - 660 V 3 phase IEC 947-3 2200 W AC-3, 230 V 3 phase IEC 947-3 2200 W AC-3, 400 V 1 phase IEC 947-3 4000 W AC-23A, 230 V 3 phase IEC 947-3 4000 W AC-3, 400 V 3 phase IEC 947-3 4000 W AC-3, 500 V 3 phase IEC 947-3 4000 W AC-3, 690 V 3 phase IEC 947-3 5500 W AC-23A, 400 V 3 phase IEC 947-3 5500 W AC-23A, 500 V 3 phase IEC 947-3 5500 W AC-23A, 690 V 3 phase IEC 947-3 8000 W AC-21, 230 V 3 phase IEC 947-3

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ie] rated operational current AC	2 A 500 V AC-15 IEC 947-5-1 3 A 400 V AC-15 IEC 947-5-1 4 A 230 V AC-15 IEC 947-5-1 8 A 400 V AC-3 3 phase IEC 947-3 10.8 A 400 V AC-23A 3 phase IEC 947-3 14.6 A 230 V AC-23A 3 phase IEC 947-3 4.7 A 690 V AC-3 3 phase IEC 947-3 6.4 A 690 V AC-23A 3 phase IEC 947-3 6.5 A 500 V AC-3 3 phase IEC 947-3 8.3 A 230 V AC-3 3 phase IEC 947-3 8.9 A 500 V AC-23A 3 phase IEC 947-3
Electrical durability	200000 cycles AC-23 200000 cycles AC-3 600000 cycles AC-15 600000 cycles AC-21
Maximum operating rate	2.5 cyc/mn AC-21 2.5 cyc/mn AC-23 2.5 cyc/mn AC-3 8.333 cyc/mn AC-15
Short-circuit current	10000 A
Short-circuit protection	20 A cartridge fuse gG
[Uimp] rated impulse withstand voltage	4 kV in isolating function 6 kV IEC 947-1
Contact operation	Slow-break
positive opening	With
Electrical connection	Captive screw clamp terminals flexible 2 x 1.5 mm² Captive screw clamp terminals solid 1 x 2.5 mm²
Mechanical durability	1000000 cycles
Net Weight	0.187 lb(US) (0.085 kg)

Environment

Standards	CENELEC EN 50013 EN/IEC 60947-3 power circuit EN/IEC 60947-5-1 control circuit
Product certifications	CSA 240 V 1 hp 1 phase CSA 240 V 3 hp 3 phase 2 UL 240 V 1 hp 3 phase UL 240 V 0.33 hp 1 phase 2
Protective treatment	TC
Ambient Air Temperature for Operation	-13...131 °F (-25...55 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Shock resistance	30 gn IEC 68-2-27
Vibration resistance	5 gn 10...150 Hz)IEC 68-2-6
Electrical shock protection class	Class II conforming to IEC 536 Class II conforming to NF C 20-030

Ordering and shipping details

Category	18406-WORLD SERVICE PARTS(OTHER OP INT)
Discount Schedule	CS2
GTIN	3389110477894
Returnability	No

Contractual warranty



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Body with Plastic Base


Front Mounting by Ø 22 mm/0.87 in. Hole

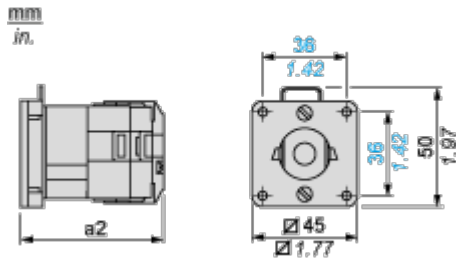


a2 49 mm/1.93 in.

Technical Description

Link Positions (Factory Mounted)



Angular Position of Switch



Switching Program



Convention Used for Switching Program Representation

-  Contact closed
-  Contact closed in 2 positions and maintained between the 2 positions
-  Sealed assembly for auto-maintain control
-  Overlapping contacts
-  Spring return position: for a switching angle of 90°, spring return is over 30° after the last position (for a maximum of 3 simultaneous contacts).

Example:

