



Main

Range of product	Modicon Quantum automation platform
Product or component type	Safety dc discrete input module

Complementary

Discrete input number	16
Group of channels	1
Logic input	Positive (sink)
Discrete input voltage	24 V DC
Voltage state 1 guaranteed	11...30 V DC
Voltage state 0 guaranteed	-3...5 V DC
Current state 1 guaranteed	≥ 3 mA
Current state 0 guaranteed	≤ 1.5 mA
Sensor power supply	19.2...30 V
Addressing requirement	7 input words
Input impedance	3675 Ohm
Absolute maximum input	30 V
Response time	≤ 25 ms from state 0 to state 1 ≤ 25 ms from state 1 to state 0
Protection type	By internal rectifier
Associated fuse rating	1 A fast blow
Power dissipation	2.75 W + (0.25 x number of points on)
Isolation between group and bus	1500 Vrms for 1 minute
Checks	Broken wire detection Diagnostic of internal channel fault System failure
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault detected (F) 16 LEDs green input status 16 LEDs red system failure, diagnostic of internal channel fault
Marking	CE
Bus current requirement	550 mA

Environment

product certifications	CSA CSA HazLoc TÜV Rheinland (SIL2) UL
------------------------	---

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0749 - Schneider Electric declaration of conformity	Compliant - since 0749 - Schneider Electric declaration of conformity

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.	Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

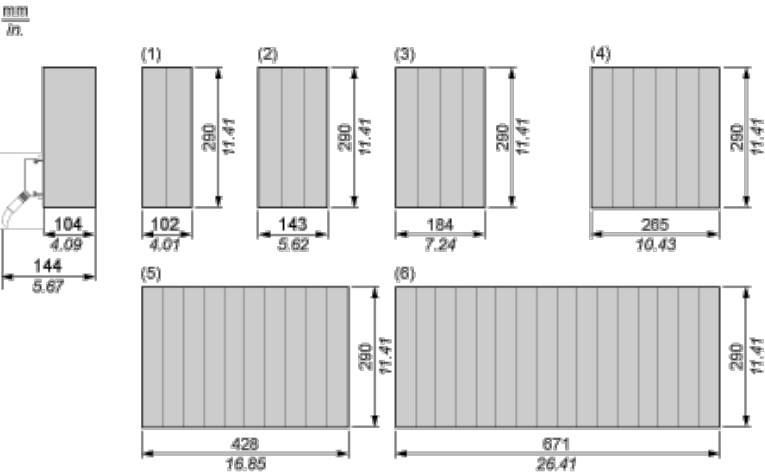

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24 Vdc 16-Channel Digital Input Module

Wiring Diagram

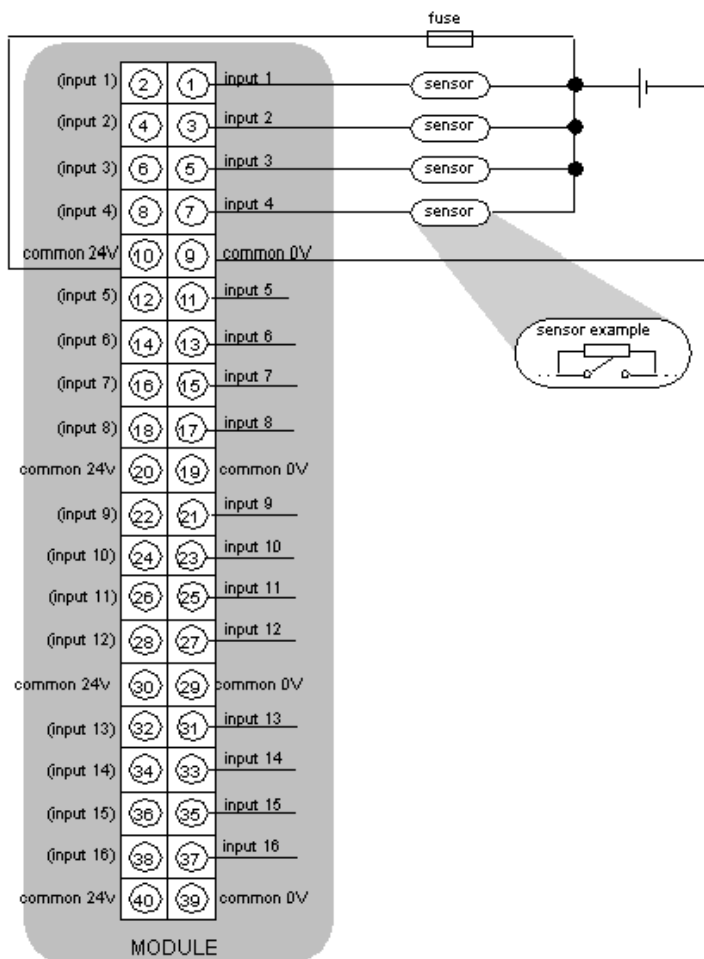

fuse: 1 A fast blow
 pull-up resistor (in sensor example): 15 kOhm

NOTE: There is only one group of 16 inputs. All common 24 V are internally connected and all common 0 V are also internally connected. The two pins of a same input (e. g. pin 1 and 2 for input 1) are internally connected too so that you can use either the right pin or the left one.