

Product datasheet

Specifications



Unity processor - 2 racks (12 slots)/ 4 racks (4/6/8 slots) - 930 mA 5 V DC

TSXP57154MC

⚠ Discontinued on: 31 Dec 2017

⚠ To be end-of-service on: 31 Dec 2026

⚠ Discontinued - Service only

Main

Range of product	Modicon Premium Automation platform
Product or component type	Unity processor
Software designation	Unity Pro

Complementary

Number of racks	2 12 slots 4 4/6/8 slots
Number of slots	24 16 32
Discrete I/O processor capacity	512 I/O
Analogue I/O processor capacity	24 I/O
Number of application specific channel	8
Integrated connection type	Non isolated serial link 2 female mini DIN connector (RS485) (19.2 kbit/s) Fipio manager (63 agents) SUB-D 9 connector
Communication module processor capacity	2 1
Memory description	Internal RAM (with PCMCIA card) 224 kB program Internal RAM (with PCMCIA card) 96 kB data Internal RAM (without PCMCIA card) 96 kB program and data PCMCIA card 256 kB additional data storage
Maximum size of object areas	32 kB (elementary and derived data) unlocated internal data 4096 %Mi located internal bits 64 %KWi constant words located internal data 64 %MWi internal words located internal data 64 kB (DFB and EFB function blocks) unlocated internal data
Application structure	32 event tasks 1 fast task 1 master task
Execution time per instruction	0.19 µs Boolean without PCMCIA card 0.25 µs Boolean with PCMCIA card 0.25 µs word or fixed-point arithmetic without PCMCIA card 0.5 µs word or fixed-point arithmetic with PCMCIA card 1.75...2.6 µs floating points with PCMCIA card 1.75...2.6 µs floating points without PCMCIA card
Number of instructions per ms	2.1 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 3.1 Kinst/ms 100 % Boolean with PCMCIA card 3.71 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 4.76 Kinst/ms 100 % Boolean without PCMCIA card
System overhead	0.3 ms for fast task 1 ms for master task

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Marking	CE
Local signalling	1 LED (green) for processor running (RUN) 1 LED (red) for activity on Fipio bus (FIP) 1 LED (red) for I/O module or configuration fault (I/O) 1 LED (red) for processor or system fault (ERR) 1 LED (yellow) for activity on TER or AUX terminal port (TER)
Current consumption	930 mA at 5 V DC
Module format	Standard
Net weight	0.42 kg

Environment

Standards	73/23/EEC CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group C CSA C22.2 No 142 CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 213 Class I Division 2 Group D UL 508 IEC 61131-2 93/68/EEC 92/31/EEC 89/336/EEC
Product certifications	GL RMRS BV DNV RINA LR ABS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	Conformal coating Humiseal 1A33 TC
IP degree of protection	IP20
Pollution degree	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	592.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	2
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	1.61 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

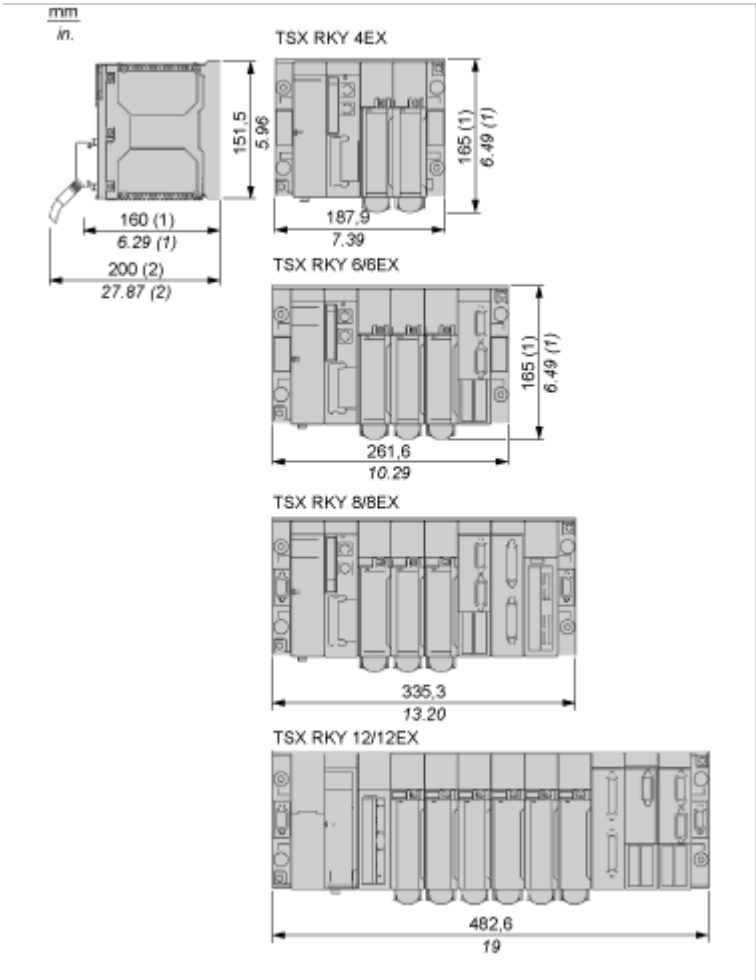

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.