


# Product data sheet

Specifications

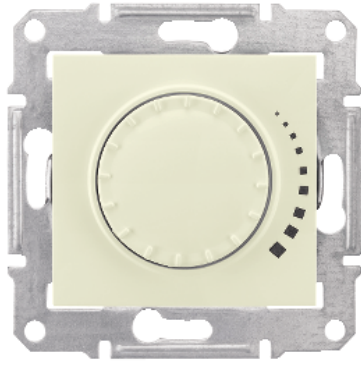

## Dimmer, Sedna, two way, rotary, 500VA, beige

SDN2200547

⚠ To be discontinued on: 30 December 2023

⚠ To be discontinued

### Main

|                           |                             |
|---------------------------|-----------------------------|
| Range of product          | Sedna                       |
| Product or component type | Dimmer                      |
| Device presentation       | Mechanism with fixing frame |
| Device application        | Light control               |
| Colour tint               | Beige                       |
| Kind of terminals         | Pillar terminals            |

### Complementary

|                       |   |
|-----------------------|---|
| Device mounting       | Flush   |
| Dimmer control        | Rotary push type  |
| Switch function       | 2-way   |
| Load type             | 230 V AC halogen lamp: 60...500 W<br>Low voltage halogen lamp with ferromagnetic transformer: 60...500 VA<br>230 V AC incandescent lamp: 60...500 W |
| Rated voltage         | 230 V AC  |
| Protection type       | Fuse protection   |
| Fuse type             | F2.5AH 250 V  |
| Main colour tint      | Beige   |
| Material              | Thermoplastic ABS-UV stabilised   |
| Surface finish        | Glossy  |
| Terminal capacity     | 1 cable(s) 2.5 mm <sup>2</sup>  |
| Wire structure        | Flexible<br>Rigid   |
| Wire stripping length | 7 mm  |
| Fixing mode           | Claws, span of claws working range: 51...80 mm<br>Screws  |
| Height                | 71 mm   |
| Width                 | 71 mm   |
| Depth                 | 47.5 mm   |
| Depth of visual part  | 20 mm   |

|                |                                 |
|----------------|---------------------------------|
| Product weight | 0.13574 kg                      |
| Market segment | Residential<br>Small commercial |

## Environment

|                         |              |
|-------------------------|--------------|
| Standards               | EN 60669-2-1 |
| Conformity mark         | CE           |
| Product certifications  | GOST-R       |
| IP degree of protection | IP20         |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 6.000 cm  |
| Package 1 Width              | 8.500 cm  |
| Package 1 Length             | 8.500 cm  |
| Package 1 Weight             | 156.000 g |
| Unit Type of Package 2       | BB1       |
| Number of Units in Package 2 | 8         |
| Package 2 Height             | 9.500 cm  |
| Package 2 Width              | 18.500 cm |
| Package 2 Length             | 27.500 cm |
| Package 2 Weight             | 1.330 kg  |
| Unit Type of Package 3       | S04       |
| Number of Units in Package 3 | 96        |
| Package 3 Height             | 30.000 cm |
| Package 3 Width              | 40.000 cm |
| Package 3 Length             | 60.000 cm |
| Package 3 Weight             | 16.618 kg |

## Offer Sustainability

|                            |   |
|----------------------------|---|
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive          | Compliant<br><a href="#">EU RoHS Declaration</a>  |
| Mercury free               | Yes   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a><br>Product out of China RoHS scope. Substance declaration for your information       |
| RoHS exemption information | Yes   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Recommended replacement(s)