

1

Design		"Classic" format		EN 50041 format	Industrial EN50041 format
		Metal, 3 cable entries	Metal, 1 cable entry	Plastic, 1 cable entry	Metal, 1 cable entry or connector
					
Enclosure		Metal		Plastic, double insulated	Metal
Modularity		Head, body and operator modularity			
Conformity/Certifications		UL, CSA, CCC (XCKM), GOST		GENELEC EN 50041 UL, CSA, CCC, GOST	
Body dimensions (w x h x d) in mm		63 x 64 x 30	52 x 72 x 30	40 x 72.5 x 36	40 x 77 x 44 42.5 x 84 x 36
Head		Linear movement (plunger) Rotary movement (lever) Rotary movement, multidirectional			
Contact blocks					
2 electrically separate contacts	snap action with positive opening operation	•	•	•	•
	slow break with positive opening operation	•	•	•	•
2 same polarity contacts	snap action	–	–	–	•
	slow break	–	–	–	–
3 electrically separate contacts	snap action with positive opening operation	•	•	•	•
	slow break with positive opening operation	•	•	•	•
4 electrically separate contacts	snap action with positive opening operation	–	–	–	–
	slow break with positive opening operation	–	–	–	–
4 contacts (2 x 2 same polarity contacts)	snap action	–	–	•	•
Degree of protection IP/IK		IP 66, IK 06		IP 65, IK 03	IP 66, IK 07
Operating temperature		- 25°C... + 70°C			- 25°C... + 70°C - 40°C or + 120°C depending on model
Connection	Screw terminals (entry for cable gland)	3 entries for ISO M20 or Pg 11 cable gland or 1/2" NPT	1 entry incorporating cable gland or tapped 1/2" NPT	1 entry for ISO M20 or Pg 13.5 cable gland	1 entry for ISO M20 or Pg 13.5 cable gland or 1/2" NPT
	Connector	–			Integral M12 or 7/8"-16UN
Type reference		XCKM	XCKL	XCKS	XCKJ
Pages		1/74	1/74	1/90	1/102

Limit switches


OsiSense XC

Variable composition: simplicity through innovation

Principle (continued)

Cable entries


- The cable entries for Compact design XCKD and XCKP switches enable:
 - simple cabling due to unrestricted access to contacts,



- simple adaptation to the various worldwide markets:
 - 6 models are available:




- ISO M16 x 1.5
- Pg 11



- ISO M20 x 1.5
- Pg 13.5
- 1/2" NPT
- PF 1/2 (G 1/2)

Each model is available in metal or plastic, respectively suited to Compact design XCKD and XCKP.

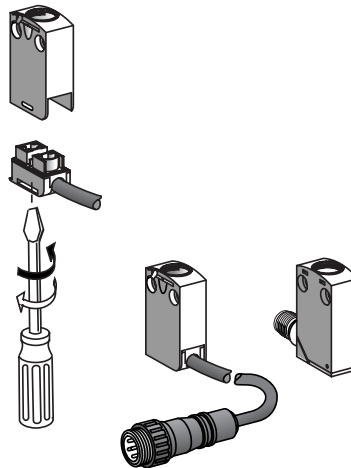
Connection components



- The miniature XCMD range allows interchanging of these pre-cabled connection components:
 - a 1/4 of a turn is all that is required for removing the connection component on XCMD bodies with 2 and 3 contacts,
 - 6 alternative cable lengths are available as standard.

- The miniature XCMD range also includes an integral or remote connector solution.

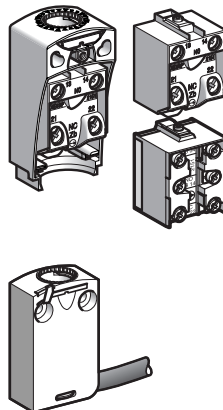Contact block or bodies with contact



- 2 and 3 snap action and slow break contact blocks, with positive opening operation, are interchangeable between the Compact design XCKD and XCKP and Classic XCKJ, XCKS, XCKM and XCKL ranges.

- For the miniature design XCMD range, the contacts are an integral part of the body:
 - 2 and 3 snap action and slow break contacts, with positive opening operation, and interchangeable connection component,
 - 4 snap action contacts, with positive opening operation, with monolithic body and connection components.

Limit switches

OsiSense XC Standard
Industrial format EN 50041

Metal, type XCK J


Conforming to CENELEC EN 50041

1

■ XCKJ


fixed body with 1 cable entry

□ With head for linear movement (plunger)



Page 1/104

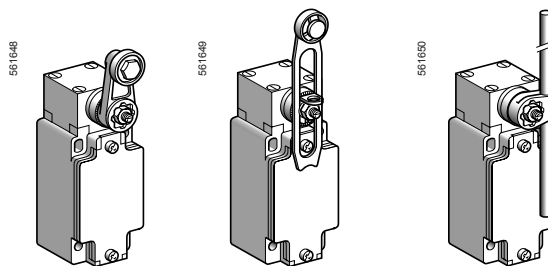□ With head for rotary movement (lever)




Page 1/104

■ XCKJ


plug-in body with 1 cable entry

□ With head for linear movement (plunger)



Page 1/106

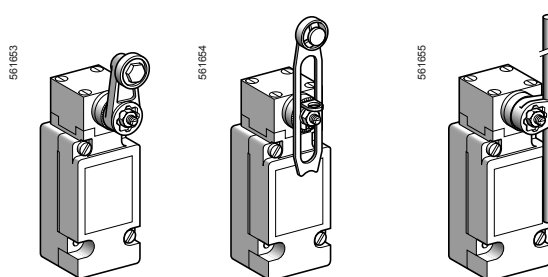□ With head for rotary movement (lever)



Page 1/106

Environment characteristics

Conformity to standards	Products	IEC 60947-5-1, EN 60947-5-1, UL 508, CSA C22-2 n° 14
	Machine assemblies	IEC 60204-1, EN 60204-1
Product certifications		UL, CSA, CCC, BV, GOST
Protective treatment	Version	Standard: "TC", special: "TH"
Ambient air temperature	For operation	- 25...+ 70°C, special sub-assemblies for use at - 40°C or + 120°C
	For storage	- 40...+ 70°C
Vibration resistance	Conforming to IEC 60068-2-6	25 gn (10...500 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn (11 ms)
Electric shock protection		Class I conforming to IEC 61140 and NF C 20-030
Degree of protection		IP 66 conforming to IEC 60529; IK 07 conforming to EN 50102
Repeat accuracy		0.01 mm on the tripping points, with 1 million operating cycles for head with end plunger
Cable entry or connector	Depending on model	Tapped entry for Pg 13.5 cable gland, tapped ISO M20 x 1.5 or tapped 1/2" NPT, or M12 connector
Materials		Bodies and heads in Zamak



Contact block characteristics


Rated operational characteristics	XE2●P	~ AC-15; A300 (Ue = 240 V, Ie = 3 A); Ithe = 10 A --- DC-13; Q300 (Ue = 250 V, Ie = 0.27 A), conforming to IEC 60947-5-1 Appendix A, EN 60947-5-1
	XE3●P	~ AC-15; B300 (Ue = 240 V, Ie = 1.5 A); Ithe = 6 A --- DC-13; R300 (Ue = 250 V, Ie = 0.1 A), conforming to IEC 60947-5-1 Appendix A, EN 60947-5-1
Rated insulation voltage	XE2●P	Ui = 500 V degree of pollution 3 conforming to IEC 60947-1 Ui = 300 V conforming to UL 508, CSA C22-2 n° 14
	XE3●P	Ui = 400 V degree of pollution 3 conforming to IEC 60947-1 Ui = 300 V conforming to UL 508, CSA C22-2 n° 14
Rated impulse withstand voltage	XE2●P	U imp = 6 kV conforming to IEC 60947-1, IEC 60664
	XE3●P	U imp = 4 kV conforming to IEC 60947-1, IEC 60664
Positive operation (depending on model)		NC contacts with positive opening operation conforming to IEC 60947-5-1 Appendix K, EN 60947-5-1
Resistance across terminals		≤ 25 mΩ conforming to IEC 60255-7 category 3
Short-circuit protection	XE2●P	10 A cartridge fuse type gG (gl)
	XE3●P	6 A cartridge fuse type gG (gl)
Connection (screw clamp terminals)	XE2SP21●1	Clamping capacity, min: 1 x 0.34 mm ² , max: 2 x 1.5 mm ²
	XE2NP21●1	Clamping capacity, min: 1 x 0.5 mm ² , max: 2 x 2.5 mm ²
	XCKJ plug-in and XESP20●1	Clamping capacity, min: 1 x 0.75 mm ² , max: 2 x 1.5 mm ²
	XE3NP and XE3SP	Clamping capacity, min: 1 x 0.34 mm ² , max: 1 x 1 mm ² or 2 x 0.75 mm ²
Minimum actuation speed		XE2SP21●1 and XE3SP : 0.01 m/minute XE2NP21●1 and XE3NP : 6 m/minute

Electrical durability


- Conforming to IEC 60947-5-1 Appendix C
- Utilisation categories AC-15 and DC-13
- Maximum operating rate: 3600 operating cycles/hour
- Load factor: 0.5

XE2SP21●1, XE2SP2141


AC supply
50/60 Hz ~
mm inductive circuit



XE2NP21●1



XCK J plug-in, XES P20●1

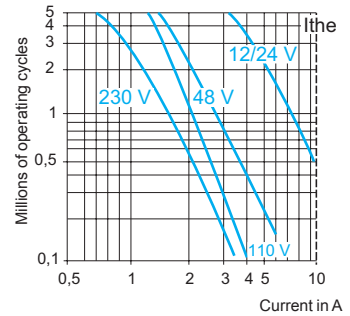

DC supply ---

Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	10	7	4

Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	13	9	7


Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	10	7	4


For XE2S P●151 on ~ or ---, NC and NO contacts simultaneously loaded to the values shown with reverse polarity.

XE3SP●●●●

AC supply
50/60 Hz ~
mm inductive circuit



XE3NP●●●●



DC supply ---

Power broken in W for 5 million operating cycles.







Voltage V	24	48	120
mm W	3	2	1










Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	4	3	2

Limit switches





OsiSense XC Standard, industrial format EN 50041
Metal, conforming to CENELEC EN 50041, type XCKJ
Complete switches, plug-in body
With 1 cable entry

Type of head	Plunger (fixing by the body)		Rotary (fixing by the body) (switches supplied for actuation from left AND right)			
	Form B (1)	Form C (1)	Form A (1)		Form D (1)	
						
Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever (2)	Steel roller lever (2)	Variable length thermoplastic roller lever (2)	Round thermoplastic rod lever, Ø 6 mm (2) (4)

References of complete switches with 1 ISO M20 x 1.5 cable entry (3)						
Single-pole CO snap action	XCKJ1161H29	XCKJ1167H29	XCKJ110511H29	XCKJ110513H29	XCKJ110541H29	XCKJ110559H29
						
Weight (kg)	0.430	0.455	0.480	0.490	0.485	0.485
Contact operation	 closed  open		(A) = cam displacement			

References of complete switches with 1 Pg 13.5 cable entry (3)
For complete switches with entry for Pg 13.5 cable gland, delete **H29** from the end of the reference.
Example: **XCKJ1161H29** becomes **XCKJ1161**.

References of complete switches with 1 entry for 1/2" NPT conduit (3)
For complete switches with entry for 1/2" NPT (USAS B2-1) conduit, replace **H29** at the end of the reference by **H7**.
Example: **XCKJ1161H29** becomes **XCKJ1161H7**.

Characteristics				
Switch actuation	On end	By 30° cam		By any moving part
Type of actuation				
Maximum actuation speed	0.5 m/s	1 m/s	1.5 m/s	
Mechanical durability (in millions of operating cycles)	30	25	30	
Minimum tripping force or torque	20 N	16 N	0.25 N.m	
Cable entry	1 entry tapped M20 x 1.5 for ISO cable gland Clamping capacity 7 to 13 mm			

(1) Form conforming to EN 50041, see page 1/137.
(2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.
(3) Switches with gold contacts: please consult our Customer Care Centre.
(4) Value taken with actuation by moving part at 100 mm from the fixing.