

Product datasheet

Specifications



PowerPact-circuit breaker-110A 2P AC 35kA at 480/440V(UL/IEC)TMD- compression lug

BGF26110

⚠ End-of-service on: 12 May 2021

⚠ Discontinued

EAN Code: 3606481193278

Main

Range	PowerPact
Product name	PowerPact B
Device short name	BG 110
Product or component type	Circuit breaker
Device application	Distribution

Complementary

[In] rated current	110 A
Number of Poles	2P
Protected poles description	2t
Control type	Toggle
Breaking capacity code	G
Breaking capacity	65 kA at 208Y/120 V AC 50/60 Hz conforming to UL 489 65 kA at 240 V AC 50/60 Hz conforming to UL 489 35 kA at 480/277 V AC 50/60 Hz conforming to UL 489 35 kA at 480 V AC 50/60 Hz conforming to UL 489 20 kA at 250 V DC conforming to UL 489 18 kA at 600Y/347 V AC 50/60 Hz conforming to UL 489
[Ue] rated operational voltage	525 V AC 50/60 Hz conforming to UL 489
Network frequency	50/60 Hz
[Ics] rated service breaking capacity	65 kA at 220...240 V AC 50/60 Hz conforming to IEC 60947-2 18 kA at 500...525 V AC 50/60 Hz conforming to IEC 60947-2 35 kA at 380...415 V AC 50/60 Hz conforming to IEC 60947-2 35 kA at 440 V AC 50/60 Hz conforming to IEC 60947-2
[Uimp] rated impulse withstand voltage	8 kV conforming to IEC 60947-2
Trip unit technology	Thermal-magneticTM-D,
Continuous current rating	80 %
[Ui] rated insulation voltage	800 V conforming to IEC 60947-2
Trip unit name	TM-D
Suitability for isolation	Yes conforming to IEC 60947-2
Utilisation category	Category A
Mechanical durability	15000 cycles conforming to IEC 947-1 Annex K ed 5.2
Electrical durability	10000 cycles conforming to IEC 947-1 Annex K ed 5.2 at 440 V In
Connection pitch	27 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

AWG gauge	AWG 14...AWG 8 aluminium/copper AWG 6...AWG 3/0 aluminium/copper
Local signalling	Presence of auxiliary contacts: flag (green)
Mounting mode	Clip-on (35 mm symmetrical DIN rail) By screws (plate)
Electrical connection	Terminal nut, ON and OFF end
Tightening torque	5 N.m for 2.5...16 mm² (AWG 14...AWG 4) 9 N.m for 25...95 mm² (AWG 3...AWG 3/0)
Number of slots	1 slot(s) for auxiliary switch OF (plug-in) 1 slot(s) for voltage release MN or MX (plug-in)
Power wire stripping length	20 mm
Color	Grey (RAL 7016)
9 mm pitches	6
Height	137 mm
Width	54 mm
Depth	80 mm
Net weight	0.669 kg
Quantity per set	Set of 1
Circuit breaker application	HACR rated

Environment

Quality labels	CE
Standards	GB 14048.2 UL 489 NEMA AB1 CSA C22.2 No 5 EN/IEC 60947-2 EN/IEC 60947-5-1 NMX J-266
Product certifications	UL IEC CCC EAC CSA NOM
IP degree of protection	Front cover: IP40 conforming to IEC 60529
IK degree of protection	IK07 conforming to IEC 62262
Pollution degree	3 conforming to IEC 60947-1
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-50...85 °C
Operating altitude	2000 m without derating 5000 m with derating

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.096 cm
Package 1 Width	11.938 cm
Package 1 Length	20.574 cm

Package 1 Weight	680.389 g
------------------	-----------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	157 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	152 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	1 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	42816a74-6c29-4456-9183-8c3fa59a5a4c
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
Halogen-free status	Halogen free product
PVC free	Yes

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	55
End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Dimensions

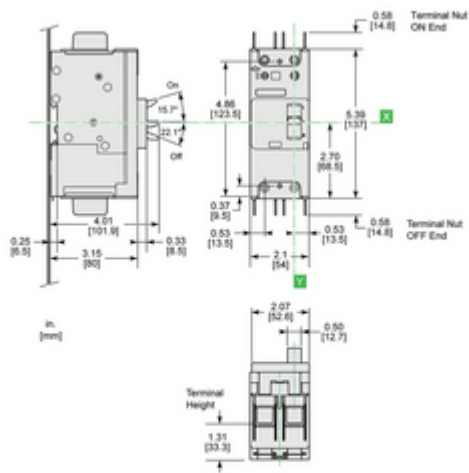

(9) TERMINATION OPTION - Terminal Nut (ON end) / Terminal Nut (OFF end)
ALL DIMENSIONS ARE APPROXIMATE
ALSO REFER TO CAD, TECHNICAL DRAWINGS, AND DOCUMENTATION