

Product datasheet

Specifications



End feed unit, Canalis KSA250, aluminium, 160/250A, right or left mounting, without line protection, 3L+N+PE, RAL9001

KSA250AB4

Main

Range of product	Canalis
Product name	KS
Device short name	KSA
Product compatibility	Canalis KSA busbar trunking 100...250 A
Offer type	Classic Rising main
Product or component type	Feed unit
Conductors material	Aluminium
[Ie] rated operational current	250 A
[Ue] rated operational voltage	230...690 V
Number of circuits	1
Busbar trunking polarity	3L + N + PE
Protection type	Without protection
Control type	Without
Colour	White (RAL 9001)

Complementary

Provided equipment	End cover
Mounting location	Right Left
Mounting mode	By screws
Mounting support	Busbar
Body material	Metal
Connections - terminals	Lug for 240 mm² flexible Lug for 240 mm² rigid
Width	501 mm
Depth	173.5 mm
Height	308 mm
Net weight	8 kg
Standards	IEC 61439-1 IEC 61439-6

Environment

IP degree of protection	IP55 conforming to IEC 60529
-------------------------	------------------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

IK degree of protection	IK08 conforming to IEC 62262
-------------------------	------------------------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	25.400 cm
Package 1 Width	42.200 cm
Package 1 Length	44.400 cm
Package 1 Weight	9.718 kg
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	60.000 cm
Package 2 Width	80.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	67.900 kg

Logistical informations

Country of origin	FR
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
Halogen-free status	Halogen free product
PVC free	Yes
Silicone-free	Yes

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

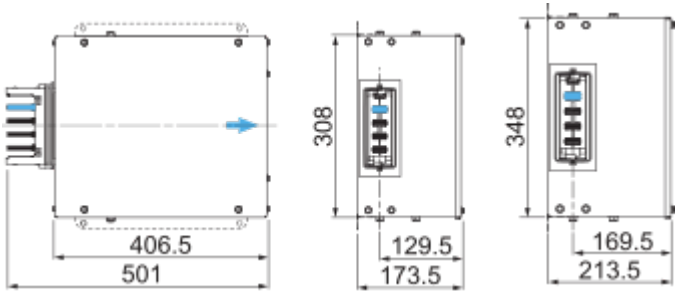

Technical Illustration

Assembly's dimensions

