

Product data sheet

Specifications



15.0 Industrial FPM, Harmony FP6,
XGA, 16M colors, Analog Multi
Touch (2 points), Front USB A/
micro-B, DVI, USB Type B, 24V DC

HMIFP6700TMD

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Harmony FP6
Product or Component Type	Touch panel screen

Complementary

Display size	15 inch
Aspect ratio	4:3
Display Resolution	1024 x 768 pixels XGA
Display colour	16 million colours
Pixel resolution	1024 x 768
Backlight lifespan	50000 hours at 77 °F (25 °C)
[Us] rated supply voltage	24 V DC
Integrated connection type	DVI-D video port USB type B USB 2.0 USB type A USB 2.0 - 1.5 Mbit/s
Inrush current	30 A
Power consumption in W	22.4 W
Type of cooling	Natural
Device mounting	Panel mounting Direct mounting VESA
Display type	LED
Touch panel	Multi touch analogue resistive
Cut-out dimensions	383.5 (+ 1/- 0) x 282.5 (+ 1/- 0) mm
Width	15.6 in (397 mm)
Depth	2.7 in (67.5 mm)
Height	11.7 in (296 mm)
Net Weight	10.8 lb(US) (4.9 kg)

Environment

IP degree of protection	IP66f IP67f Type 1 Type 4X Type 12 Type 13
Ambient air temperature for operation	32...131 °F (0...55 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Pollution degree	2
Vibration resistance	1 gn 5...9 Hz) - single amplitude - IEC 61131-2 1 gn 9...150 Hz) - fixed amplitude - IEC 61131-2 1 gn - X, Y, Z directions for 10 cycles (approx. 100 min) - IEC 61131-2
Standards	CE FCC part 15 UL 61010-2-201 CSA C22.2 No 61010-2-201
Product certifications	RCM KC UKCA DNV (except 22" wide display) ATEX zone 2 ATEX zone 22 dust CULus Class 1 Division 2 IECEX zone 2 (DC model, front USB cover must be locked with screw) IECEX zone 22
Ambient air temperature for storage	-4...140 °F (-20...60 °C)
Operating altitude	6561.68 ft (2000 m)
Shock resistance	147 m/s ² IEC 61131-2 147 m/s ² 3 shocks in each direction X, Y and Z
Electromagnetic compatibility	Electrostatic discharge immunity test 6 kV contact discharge IEC 61000-4-2 level 3 Electrostatic discharge immunity test 8 kV air discharge IEC 61000-4-2 level 3 Electrical fast transient/burst immunity test 2 kV power ports IEC 61000-4-4 Electrical fast transient/burst immunity test 1 kV signal ports IEC 61000-4-4

Ordering and shipping details

Category	US10MC322575
Discount Schedule	0MC3
GTIN	3606481808219
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	18.307 in (46.500 cm)
Package 1 Width	5.709 in (14.500 cm)
Package 1 Length	19.094 in (48.500 cm)
Package weight(Lbs)	12.258 lb(US) (5.560 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	5
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	31.496 in (80.000 cm)
Package 2 Length	25.197 in (64.000 cm)
Package 2 Weight	83.335 lb(US) (37.800 kg)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	1 284 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	297 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.7 kg CO2 eq.
Carbon footprint of the installation phase [A5]	1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	980 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	5 kg CO2 eq.

Use Better



Materials and Substances

F-gas usage performance	K izolaci a zhášení je využíváno pouze vzduchové a vakuové médium; bez obsahu F-plynů včetně SF6.
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	3e485f57-089b-461f-87ef-eb75768c4245
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Product contains halogen above thresholds
PVC free	No
Silicon free	No

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	55
-------------------------------	----

Take-back

No


WEEE Label

 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

External Dimensions

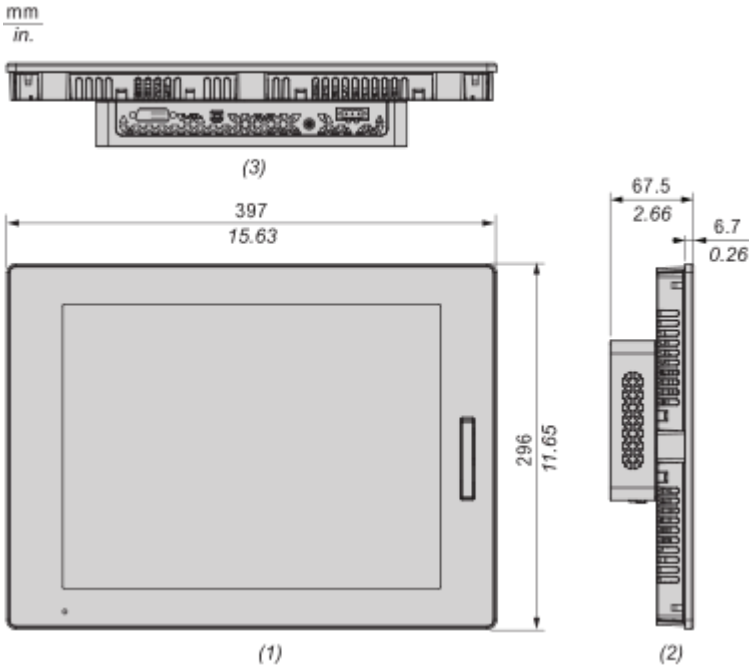


- (1): Front
- (2): Left
- (3): Bottom

Connections and Schema


Mounting

Panel Cut Dimension

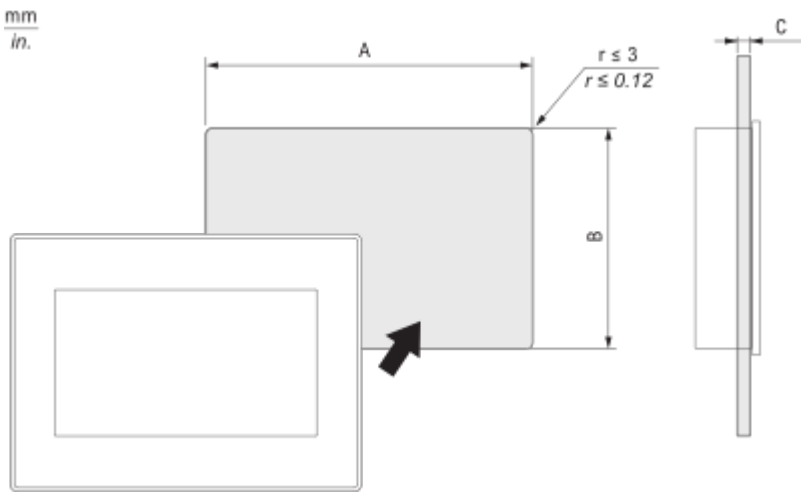

A		B		C	
mm	in.	mm	in.	mm	in.
383.5 (+1/-0)	15.10 (+0.04/-0)	282.5 (+1/-0)	11.12 (+0.04/-0)	1.6...5	0.06...0.2


Mounting Orientation

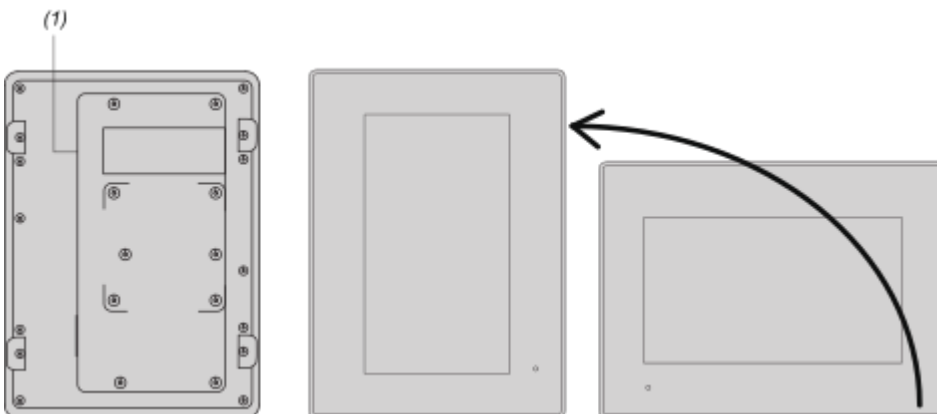


(1): Power connector

Note: For portrait orientation mounting, make sure the screen editing software supports the function.

Mounting Angle

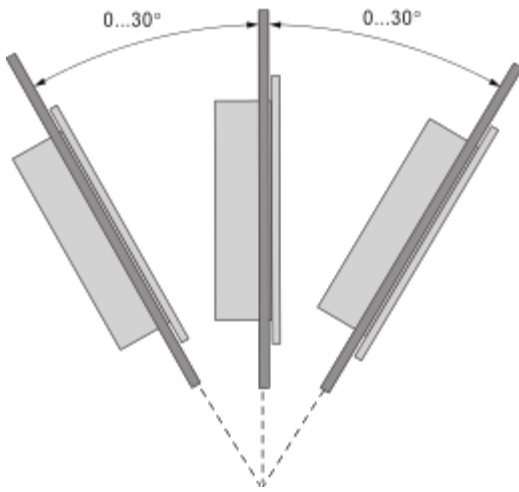

Clearance

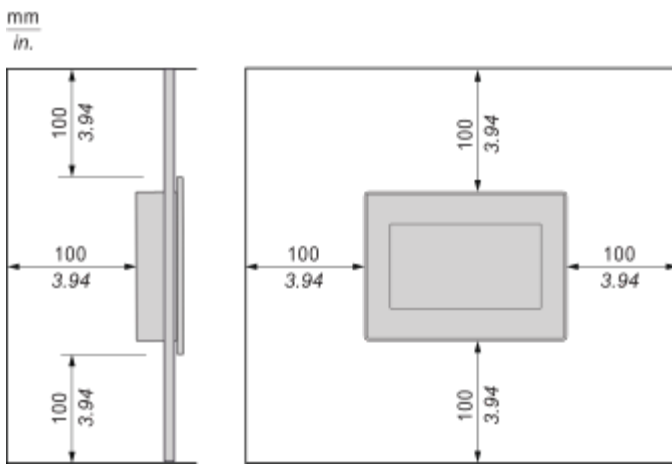

Technical Illustration

Dimensions

mm
in.

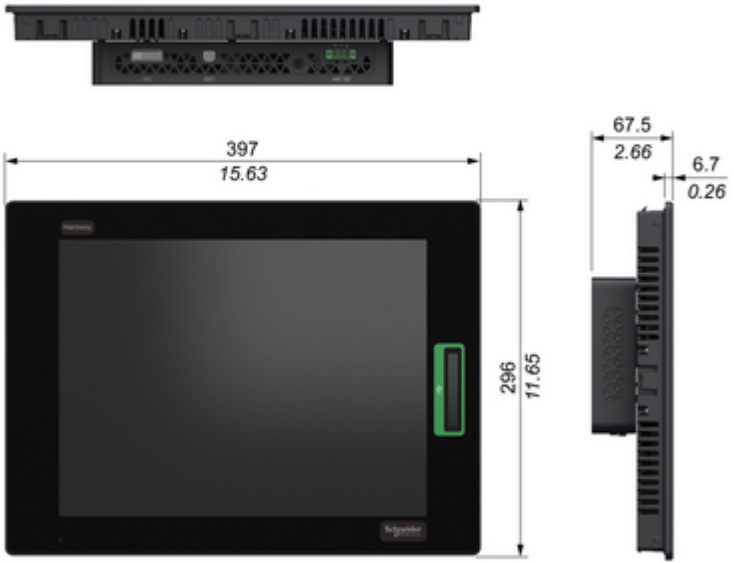


Image of product / Alternate images

Alternative



