

Siemens  
EcoTech



SIRIUS soft starter S2 45 A, 30 kW/500 V, 40 °C 400-600 V AC, 24 V AC/DC  
spring-type terminals



### General technical data

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Soft starter
<b>product feature</b>	
• integrated bypass contact system	Yes
• thyristors	Yes
<b>product function</b>	
• intrinsic device protection	Yes
• motor overload protection	Yes
• evaluation of thermistor motor protection	No
• external reset	Yes
• adjustable current limitation	Yes
• inside-delta circuit	No
<b>product component motor brake output</b>	No
<b>insulation voltage rated value</b>	600 V
<b>degree of pollution</b>	3, acc. to IEC 60947-4-2
<b>blocking voltage of the thyristor maximum</b>	1 600 V
<b>reference code according to EN 61346-2</b>	Q
<b>reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750</b>	G

### Power Electronics

<b>operational current</b>	
• at 40 °C rated value	45 A
• at 50 °C rated value	42 A
• at 60 °C rated value	39 A
<b>yielded mechanical performance for 3-phase motors</b>	
• at 400 V	
— at standard circuit at 40 °C rated value	22 kW
• at 500 V	
— at standard circuit at 40 °C rated value	30 kW
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>relative negative tolerance of the operating frequency</b>	-10 %
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>operating voltage at standard circuit rated value</b>	400 ... 600 V
<b>relative negative tolerance of the operating voltage at standard circuit</b>	-15 %
<b>relative positive tolerance of the operating voltage at</b>	10 %

<b>standard circuit</b>	
<b>minimum load [%]</b>	20 %
<b>adjustable motor current for motor overload protection minimum rated value</b>	23 A
<b>continuous operating current [% of I<sub>e</sub>] at 40 °C</b>	115 %
<b>power loss [W] at operational current at 40 °C during operation typical</b>	6 W
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC/DC
<b>control supply voltage frequency 1 rated value</b>	50 Hz
<b>control supply voltage frequency 2 rated value</b>	60 Hz
<b>relative negative tolerance of the control supply voltage frequency</b>	-10 %
<b>relative positive tolerance of the control supply voltage frequency</b>	10 %
<b>control supply voltage 1 at AC</b>	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
<b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>	-20 %
<b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>	20 %
<b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>	-20 %
<b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>	20 %
<b>control supply voltage 1 at DC rated value</b>	24 V
<b>relative negative tolerance of the control supply voltage at DC</b>	-20 %
<b>relative positive tolerance of the control supply voltage at DC</b>	20 %
<b>display version for fault signal</b>	red
<b>Mechanical data</b>	
<b>size of engine control device</b>	S2
<b>width</b>	55 mm
<b>height</b>	160 mm
<b>depth</b>	170 mm
<b>fastening method</b>	screw and snap-on mounting
<b>mounting position</b>	With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
<b>required spacing with side-by-side mounting</b>	
• upwards	60 mm
• at the side	30 mm
• downwards	40 mm
<b>wire length maximum</b>	300 m
<b>number of poles for main current circuit</b>	3
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	spring-loaded terminals
<b>number of NC contacts for auxiliary contacts</b>	0
<b>number of NO contacts for auxiliary contacts</b>	2
<b>number of CO contacts for auxiliary contacts</b>	1
<b>type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point</b>	
• solid	2x (1.5 ... 16 mm <sup>2</sup> )
• finely stranded with core end processing	0.75 ... 25 mm <sup>2</sup>
• stranded	0.75 ... 35 mm <sup>2</sup>
<b>type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point</b>	
• solid	2x (1.5 ... 16 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> <li>stranded</li> </ul>	<p>1.5 ... 25 mm<sup>2</sup></p> <p>1.5 ... 35 mm<sup>2</sup></p>
<b>type of connectable conductor cross-sections for main contacts for box terminal using both clamping points</b> <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>stranded</li> </ul>	<p>2x (1.5 ... 16 mm<sup>2</sup>)</p> <p>2x (1.5 ... 16 mm<sup>2</sup>)</p> <p>2x (1.5 ... 25 mm<sup>2</sup>)</p>
<b>type of connectable conductor cross-sections for AWG cables for main contacts for box terminal</b> <ul style="list-style-type: none"> <li>using the back clamping point</li> <li>using the front clamping point</li> <li>using both clamping points</li> </ul>	<p>16 ... 2</p> <p>18 ... 2</p> <p>2x (16 ... 2)</p>
<b>type of connectable conductor cross-sections for auxiliary contacts</b> <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> </ul>	<p>2x (0.25 ... 2.5 mm<sup>2</sup>)</p> <p>2x (0.25 ... 1.5 mm<sup>2</sup>)</p>
<b>type of connectable conductor cross-sections for AWG cables</b> <ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	<p>2x (24 ... 14)</p>

<b>Ambient conditions</b>	
<b>installation altitude at height above sea level</b>	5 000 m
<b>environmental category</b> <ul style="list-style-type: none"> <li>during transport according to IEC 60721</li> <li>during storage according to IEC 60721</li> <li>during operation according to IEC 60721</li> </ul>	<p>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)</p> <p>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4</p> <p>3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p>
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul>	<p>-25 ... +60 °C</p> <p>-40 ... +80 °C</p>
<b>derating temperature</b>	40 °C
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front

<b>UL/CSA ratings</b>	
<b>yielded mechanical performance [hp] for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>at 460/480 V <ul style="list-style-type: none"> <li>at standard circuit at 50 °C rated value</li> </ul> </li> <li>at 575/600 V <ul style="list-style-type: none"> <li>at standard circuit at 50 °C rated value</li> </ul> </li> </ul>	<p>30 hp</p> <p>40 hp</p>
<b>contact rating of auxiliary contacts according to UL</b>	B300 / R300

<b>Approvals Certificates</b>	
Environmental Product Declaration	
<ul style="list-style-type: none"> <li>global warming potential [CO<sub>2</sub> eq] / during manufacturing</li> <li>global warming potential [CO<sub>2</sub> eq] / during sales</li> <li>global warming potential [CO<sub>2</sub> eq] / during operation</li> <li>global warming potential [CO<sub>2</sub> eq] / after end of life</li> <li>global warming potential [CO<sub>2</sub> eq] / total</li> </ul>	<p>26.9 kg</p> <p>0.324 kg</p> <p>158 kg</p> <p>-4.56 kg</p> <p>181 kg</p>

<b>Environment</b>	<b>General Product Approval</b>
--------------------	---------------------------------

[Environmental Con-  
firmations](#)



Siemens  
EcoTech



<b>General Product Approval</b>	<b>EMV</b>	<b>For use in hazardous locations</b>
---------------------------------	------------	---------------------------------------



Test Certificates	Maritime application	other
-------------------	----------------------	-------

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



[Confirmation](#)

other	Railway
-------	---------

[Confirmation](#)



[Special Test Certificate](#)

[Confirmation](#)

**Further information**

**Simulation Tool for Soft Starters (STS)**

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4036-2BB05>

**Cax online generator**


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4036-2BB05>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4036-2BB05>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW4036-2BB05&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4036-2BB05&lang=en)

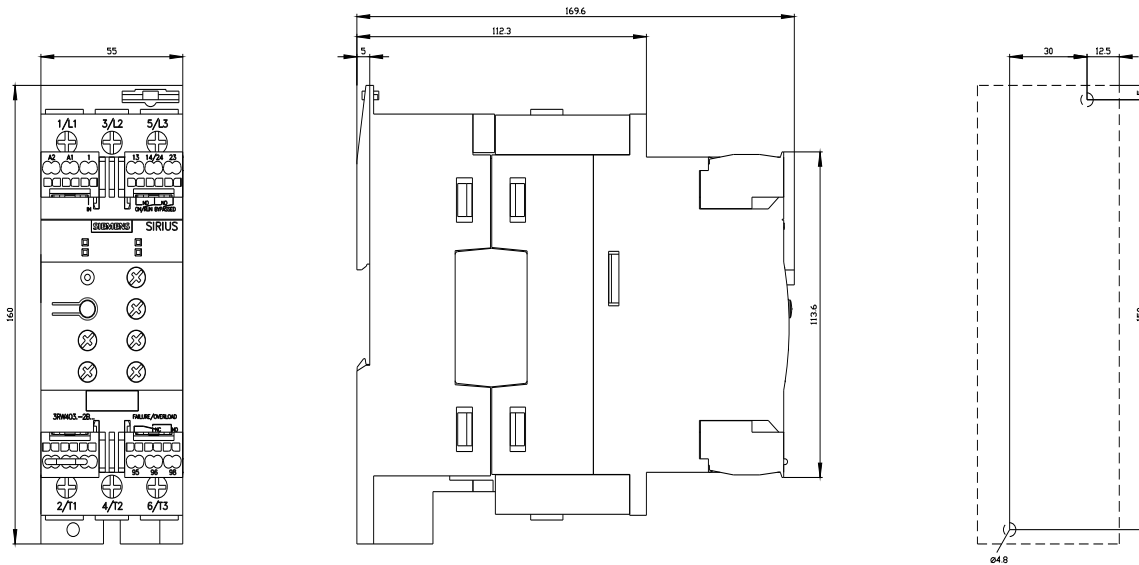



last modified:

2/12/2026 