




AS-i data coupler K60 digital 4 DI/4 DQ, virtual, IP67 module occupies 2 addresses
Mounting plate 3RK1901-0CA00 must be ordered separately

General technical data		
design of the product	AS-Interface data coupler	
design of the device type	standard slave	
Inputs		
number of digital inputs	4	
Outputs		
number of digital outputs	4	
Ambient conditions		
ambient temperature		
• during operation	-25 ... +85 °C	
• during storage	-40 ... +85 °C	
protection class IP	IP67	
Mechanical data		
width	60 mm	
height	152 mm	
depth	29 mm	
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module	
shock resistance	15 g / 11 ms	
Certificates/ approvals		
General Product Approval	EMV	Maritime application

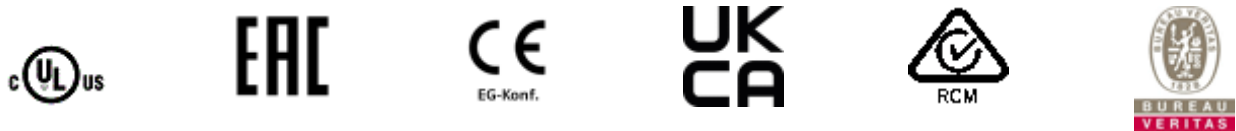

Maritime application	other	Environment
		Confirmation Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1408-8SQ00-0AA3>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1408-8SQ00-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1408-8SQ00-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1408-8SQ00-0AA3&lang=en

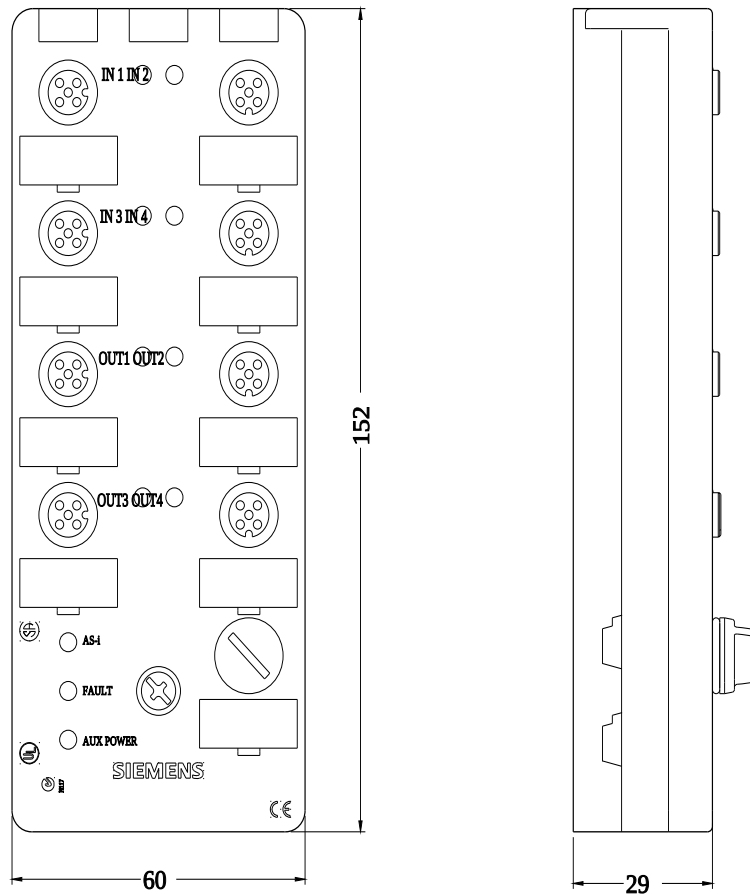

last modified:

4/4/2026