

Product datasheet

Specifications



Communication module, Modicon M580, performance, Ethernet IP/Modbus TCP

BMENOC0302

Main

Range of product	Modicon M580
Product or component type	Communication module
Device application	Process and control communication module

Complementary

Product compatibility	Modicon M580 standalone CPU (BMEP58.....) Modicon M580 Redundant CPU (BMEH58.....)
Mounting location	Main rack
Backplane slot location	Ethernet + X-bus Slot
Maximum number of modules per rack	6
Supply	Internal power supply via rack
Integrated connection type	2 Ethernet, connector type: RJ45, transmission rate: 10/100/1000 Mbit/s, transmission mode: double shielded twisted pair 1 Ethernet, connector type: RJ45, transmission rate: 10/100 Mbit/s, transmission mode: double shielded twisted pair
Exchange mode	Half duplex and full duplex
Transmission support medium	Ethernet backplane
Communication service	Bandwidth management FDR server SNMP network administrator Modbus TCP I/O Scanner and Messaging Ethernet/IP I/O Scanner and Messaging RSTP support Port mirroring Embedded multiport switch
Cybersecurity	Secure communication (HTTPS) Certificate based authentication System hardening Role-based access control Syslog protocol support IPSec (initiator and responder role) Achilles level 2 tested SNMP logging
Function available	Hot swappable module Advanced diagnostic information (DDT, web pages, Modbus TCP and EIP Objects) SCADA connection through Modbus TCP
Web server	Advanced
Current consumption	155 mA at 24 V DC
Local signalling	1 LED (green) for processor running (RUN) 1 LED (red) for processor or system fault (ERR) 1 LED (green/red) for ETH MS (Ethernet port configuration status) 1 LED (green/red) for Eth NS (Ethernet network status)
Width	32 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Height	131 mm
Length	86.05 mm
Net weight	0.4 kg

Environment

IP degree of protection	IP20
Protective treatment	Standard version
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	5...95 % without condensation
Operating altitude	0...2000 m 2000 m...5000 m with derating factor
vibration resistance	3 gn
Shock resistance	30 gn
Marking	CE
Product certifications	CE RCM CULus UKCA
Standards	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IEC 61000-6-5, interface type 1 and type 2 IEC 61850-3, location G EN 50121-3-2 EN 50121-4 EN 50121-5 EN 50155
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2011/65/EU - RoHS

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	18.000 cm
Package 1 Length	26.000 cm
Package 1 Weight	554.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.901 kg



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	61 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	37 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	24 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.9 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
SCIP Number	A84ac67c-5954-4bcf-a15f-250214b62db5
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	0
End of life manual availability	End of Life Information
Take-back	No

Dimensions Drawings

Dimensions

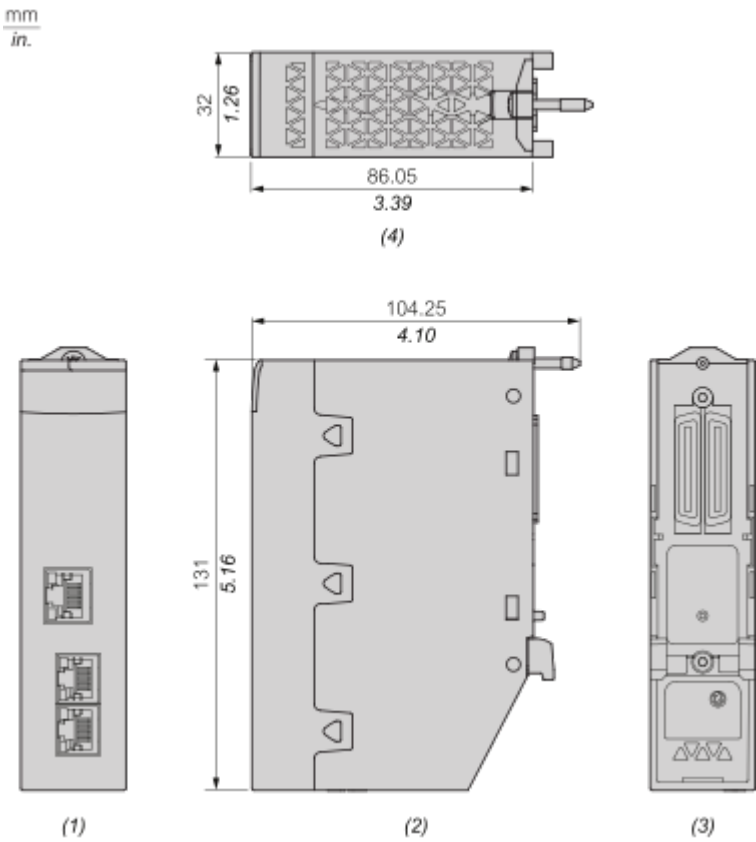

- (1) : Front View
- (2) : Side View
- (3) : Back View
- (4) : Top View

Image of product / Alternate images

Alternative





