








Contactora AC 110 V 50 HZ AC3 30 kW 400 V 3-pole, size S3 screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT5
General technical data	
size of contactor	S3
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state per pole	4.6 W
• without load current share typical	5.46 W
type of calculation of power loss current-dependent	quadratic
insulation voltage rated value	1 000 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	6.8 g / 5 ms, 4 g / 10 ms
shock resistance with sine pulse	
• at AC	10.6 g / 5 ms, 6.2 g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Substance Prohibition (day/month/year)	03/01/2017
Net Weight	1.8 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
• at AC-3 rated value maximum	1 000 V
• at AC-3e rated value maximum	1 000 V
operational current	
• at AC-1 up to 690 V	
— at ambient temperature 40 °C rated value	100 A


<ul style="list-style-type: none"> — at ambient temperature 60 °C rated value 	90 A
<ul style="list-style-type: none"> ● at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 690 V rated value 	65 A 47 A
<ul style="list-style-type: none"> ● at AC-3e <ul style="list-style-type: none"> — at 400 V rated value — at 690 V rated value — at 1000 V rated value 	65 A 47 A 25 A
connectable conductor cross-section in main circuit at AC-1	
<ul style="list-style-type: none"> ● at 60 °C minimum permissible ● at 40 °C minimum permissible 	35 mm ² 35 mm ²
operational current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> ● at 400 V rated value ● at 690 V rated value 	28 A 20 A
operating power	
<ul style="list-style-type: none"> ● at AC-1 <ul style="list-style-type: none"> — at 230 V at 60 °C rated value — at 400 V at 60 °C rated value — at 690 V at 60 °C rated value ● at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value ● at AC-3e <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value 	34 kW 59 kW 102 kW 18.5 kW 30 kW 37 kW 45 kW 18.5 kW 30 kW 37 kW 45 kW 30 kW
operating power for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> ● at 400 V rated value ● at 690 V rated value 	15.1 kW 18.6 kW
no-load switching frequency	
<ul style="list-style-type: none"> ● at AC 	5 000 1/h
operating frequency	
<ul style="list-style-type: none"> ● at AC-1 maximum ● at AC-3 maximum ● at AC-3e maximum ● at AC-4 maximum 	1 000 1/h 1 000 1/h 1 000 1/h 300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
<ul style="list-style-type: none"> ● at 50 Hz rated value 	110 V
operating range factor control supply voltage rated value of magnet coil at AC	
<ul style="list-style-type: none"> ● at 50 Hz 	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	
<ul style="list-style-type: none"> ● at 50 Hz 	218 VA
inductive power factor with closing power of the coil	
<ul style="list-style-type: none"> ● at 50 Hz 	0.61
apparent holding power of magnet coil at AC	
<ul style="list-style-type: none"> ● at 50 Hz 	21 VA
inductive power factor with the holding power of the coil	
<ul style="list-style-type: none"> ● at 50 Hz 	0.26
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	0

contact				
number of NO contacts for auxiliary contacts instantaneous contact	0			
operational current at AC-12 maximum	10 A			
operational current at AC-15				
• at 230 V rated value	6 A			
• at 400 V rated value	3 A			
operational current at DC-12				
• at 110 V rated value	3 A			
• at 220 V rated value	1 A			
operational current at DC-13				
• at 24 V rated value	6 A			
• at 110 V rated value	1 A			
• at 220 V rated value	0.3 A			
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)			
UL/CSA ratings				
yielded mechanical performance [hp] for 3-phase AC motor at 460/480 V rated value	50 hp			
Short-circuit protection				
design of the fuse link				
• for short-circuit protection of the main circuit				
— with type of coordination 1 required	fuse gL/gG: 250 A			
— with type of coordination 2 required	fuse gL/gG: 125 A			
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface			
fastening method side-by-side mounting	Yes			
fastening method	screw and snap-on mounting onto 35 mm and 75 mm DIN rail			
height	146 mm			
width	70 mm			
depth	139 mm			
Connections/ Terminals				
type of electrical connection				
• for main current circuit	screw-type terminals			
• for auxiliary and control circuit	screw-type terminals			
type of connectable conductor cross-sections for main contacts				
• solid or stranded	2x (2.5 ... 16 mm ²)			
• finely stranded with core end processing	2x (2.5 ... 35 mm ²)			
• finely stranded without core end processing	2x (10 ... 35 mm ²)			
type of connectable conductor cross-sections				
• for auxiliary contacts				
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)			
• for AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12			
Safety related data				
product function mirror contact according to IEC 60947-4-1	Yes			
Electrical Safety				
protection class IP on the front according to IEC 60529	IP20			
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front			
Approvals Certificates				
General Product Approval	EMV			
 Confirmation				
Maritime application	other	Environment		



Further information

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/products?pnid=16027&lc=en-CN>

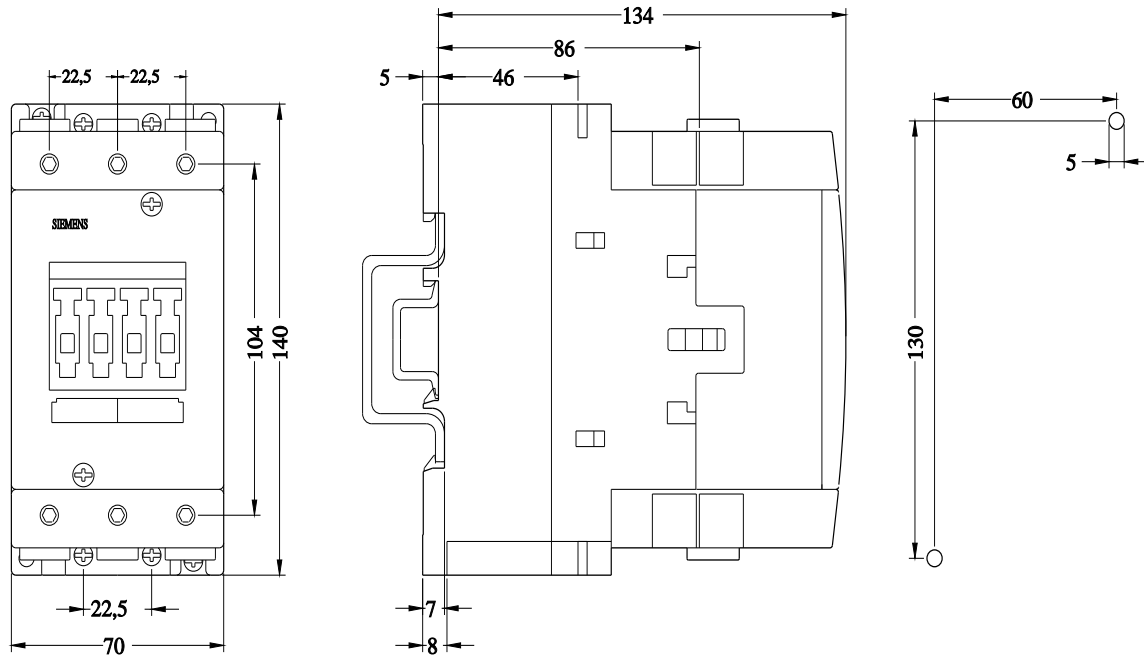



last modified:

4/4/2026 