

Product data sheet

Specifications



Connector module, Lexium 32i,
connection for industrial connectors,
CANopen, 2 DI sink, STO

VW3M9203

⚠ Discontinued on: Jan 23, 2021

⚠ Discontinued

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Lexium 32i
Product or Component Type	Connector module
Accessory / separate part category	Connection accessories
Electrical Connection	Industrial connector

Complementary

Product compatibility	Drive control unit LXM32i CANopen
Accessory / separate part destination	Motor BMI with drive control unit Lexium 32i
Range Compatibility	Lexium 32i
Communication interface	CANmotion CANopen DS402
Input/output type	2 discrete inputs
Discrete input logic	Sink
Safety Function	STO (safe torque off)
Product Weight	0.481 lb(US) (0.218 kg)

Ordering and shipping details

Category	US1PC5618289
Discount Schedule	PC56
GTIN	3606480610905
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.2 in (8.2 cm)
Package 1 Width	4.5 in (11.5 cm)
Package 1 Length	6.7 in (17 cm)
Package weight(Lbs)	7.7 oz (218 g)

Contractual warranty

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

Use Better



Materials and Substances

EU RoHS Directive

[Compliant By Exemption](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again




Repack and remanufacture

Circularity Profile

[End of Life Information](#)

Connections and Schema

Connection of I/O Module for CANopen with Industrial Connectors

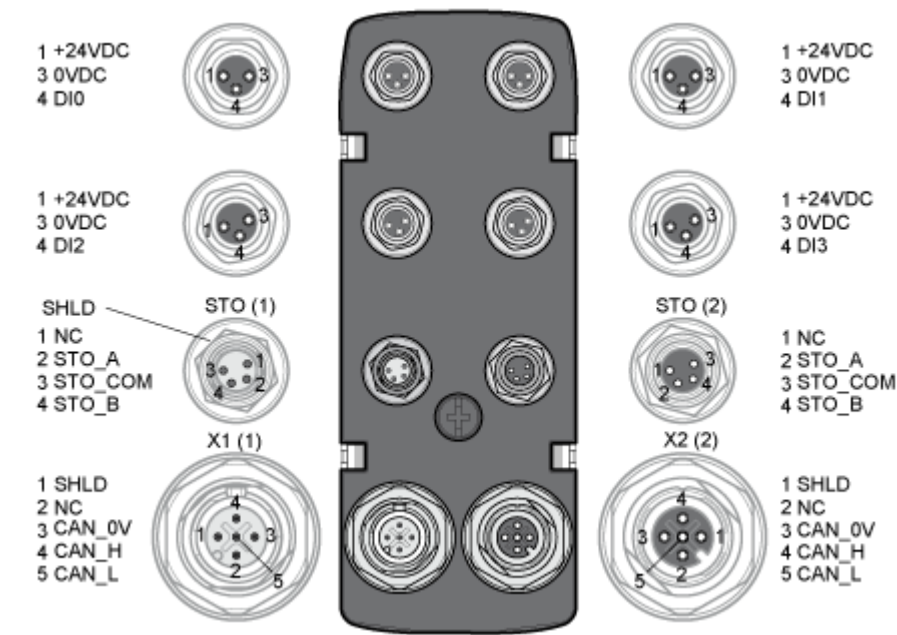

- (1) IN
(2) OUT

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
STO_A	Safety function STO
STO_COM	Reference potential for safety function STO
STO_B	Safety function STO
SHLD	Shield (grounded internally)
CAN_0V	Reference potential for CAN
CAN_H	CAN interface
CAN_L	CAN interface

Signal	Meaning
NC	Not connected