

Product datasheet

Specifications



double-format PL7 processor - Transparent Ready - 1360 mA

TSXP573623AMC

⚠ Discontinued on: Dec 31, 2017 AD

⚠ End-of-service on: Dec 31, 2025 AD

⚠ Discontinued - Service only

Main

Range of product	Modicon Premium Automation platform
Product or component type	Double-format PL7 processor
Software designation	PL7 Junior/Pro

Complementary

Concept	Transparent Ready
Number of racks	16 4/6/8 slots 8 12 slots
Number of slots	96 128 64
Discrete I/O processor capacity	1024 I/O
Analogue I/O processor capacity	128 I/O
Number of application specific channel	32
Number of process control channel	15 up to 45 simple loops
Integrated connection type	Ethernet TCP/IP RJ45 connector (10/100 Mbit/s) Non isolated serial link 2 female mini DIN connector (19.2/115 kbit/s)
Communication module processor capacity	2 fieldbus modules (1 if CANopen used) 8 AS-Interface bus modules 1 CANopen 2 network module
Memory description	Internal RAM (with PCMCIA card) 80 Kwords data Internal RAM (without PCMCIA card) 64 Kwords program and data PCMCIA card 2688 Kwords additional data storage PCMCIA card 384 Kwords program
Maximum size of object areas	16384 %Mi located internal bits 30.5 %MWi internal words located internal data 32 %KWi constant words located internal data
Application structure	1 fast task 1 master task 64 event tasks
Execution time per instruction	2.6 µs floating points with PCMCIA card 0.12 µs Boolean without PCMCIA card 0.17 µs Boolean with PCMCIA card 0.17 µs word or fixed-point arithmetic without PCMCIA card 0.33 µs word or fixed-point arithmetic with PCMCIA card 2.5 µs floating points without PCMCIA card
Number of instructions per ms	3.08 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 4.49 Kinst/ms 100 % Boolean with PCMCIA card 4.7 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 6.57 Kinst/ms 100 % Boolean without PCMCIA card

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

System overhead	0.29 ms for fast task 1.15 ms for master task
Marking	CE
Local signalling	1 LED (green) for Ethernet TCP/IP port ready (RUN) 1 LED (green) for processor running (RUN) 1 LED (red) for collision detection (COL) 1 LED (red) for Ethernet TCP/IP port fault (ERR) 1 LED (red) for I/O module or configuration fault (I/O) 1 LED (red) for processor or system fault (ERR) 1 LED (yellow) for activity on the terminal port (TER) 1 LED (yellow) for Ethernet link diagnostics (STS) 1 LED (yellow) for reception activity (RX) 1 LED (yellow) for transmission activity (TX)
Current consumption	1360 mA at 5 V DC
Module format	Double

Environment

Standards	92/31/EEC 73/23/EEC 93/68/EEC CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group D CSA C22.2 No 142 CSA C22.2 No 213 Class I Division 2 Group C IEC 61131-2 UL 508 89/336/EEC
Product certifications	LR RINA ABS BV RMRS GL DNV
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	Conformal coating Humiseal 1A33 TC
IP degree of protection	IP20
Pollution degree	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.5 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	618.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	4
Package 2 Height	30 cm

Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	2.987 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

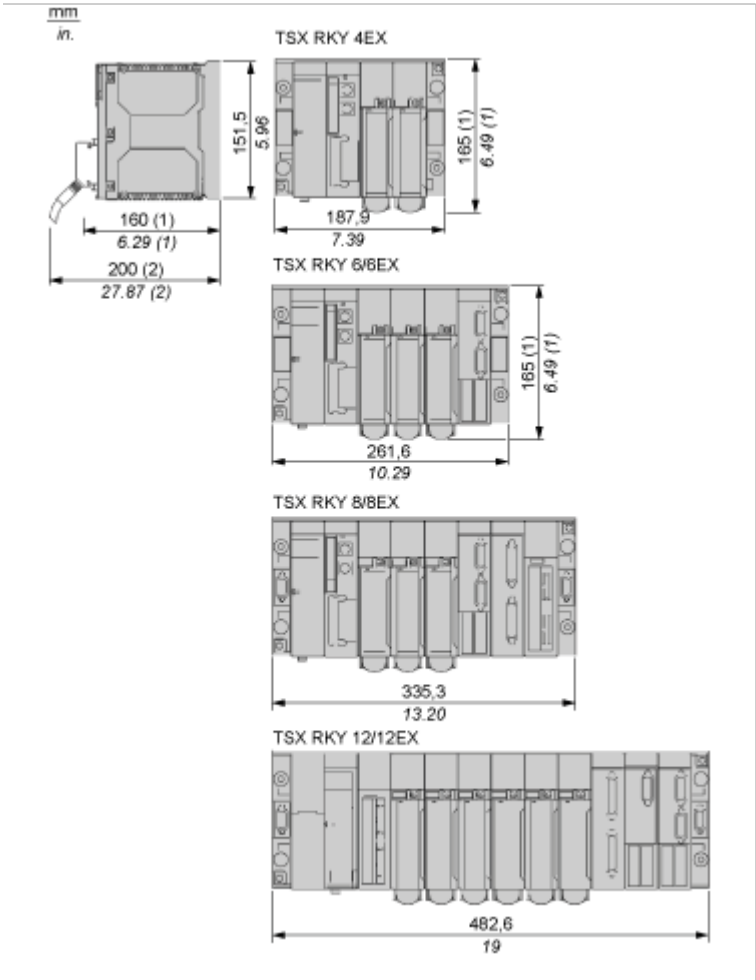

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.