



circuit breaker 3VA2 IEC Frame 1000 breaking capacity class H Icu=85 kA @ 415 V 4-pole, line protection ETU330, LIG, In=1000 A overload protection Ir=400 A...1000 A short-circuit protection Ii=1.5...10 x In neutral conductor protection adjustable (OFF, 50%, 100%) ground-fault protection Ig=0.2...1 x In= tg=0.1/0.3s nut keeper kit

| Model | |
|---|---|
| product brand name | SENTRON |
| product designation | Molded case circuit breaker |
| design of the product | Line protection |
| design of the overcurrent release | ETU330 |
| protection function of the overcurrent release | LIG |
| number of poles | 4 |
| General technical data | |
| insulation voltage / rated value | 800 V |
| operating voltage / at AC / rated value | 690 V |
| power loss [W] / maximum | 330 W |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole | 110 W |
| mechanical service life (operating cycles) / typical | 10 000 |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V | 4 900 |
| electrical endurance (operating cycles) / at AC-1 / at 690 V | 3 400 |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | No |
| ground-fault monitoring version | Summation current formation L + N conductor |
| product function | |
| • communication function | No |
| • other measurement function | No |
| Net Weight | 16.78 kg |
| Current | |
| operational current | |
| • at 40 °C | 1 000 A |
| • at 45 °C | 1 000 A |
| • at 50 °C | 1 000 A |
| • at 55 °C | 1 000 A |
| • at 60 °C | 955 A |
| • at 65 °C | 885 A |
| • at 70 °C | 815 A |
| Switching capacity according to IEC 60947 | |
| switching capacity class of the circuit breaker | H |
| maximum short-circuit current breaking capacity (Icu) | |
| • at 240 V | 110 kA |
| • at 415 V | 85 kA |
| • at 440 V | 85 kA |
| • at 500 V | 55 kA |

| | |
|--|---|
| <ul style="list-style-type: none"> • at 690 V | 35 kA |
| operating short-circuit current breaking capacity (Ics) | |
| <ul style="list-style-type: none"> • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V | 110 kA 85 kA 70 kA 55 kA 19 kA |
| short-circuit current making capacity (Icm) | |
| <ul style="list-style-type: none"> • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V | 242 kA 187 kA 187 kA 121 kA 73.5 kA |
| Adjustable parameters | |
| product feature / for L-tripping / can be switched on/off | No |
| adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic | |
| <ul style="list-style-type: none"> • minimum • maximum | 400 A 1 000 A |
| adjustable response value delay time (tr) / for L-tripping / with I2t characteristic | |
| <ul style="list-style-type: none"> • minimum • maximum | 0.5 s 17 s |
| adjustable response value setting current (Ii) / for I-tripping | |
| <ul style="list-style-type: none"> • minimum • maximum | 1 500 A 10 000 A |
| adjustable current response value current / for G-tripping / with standard characteristic | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 200 A 1 000 A |
| adjustable response value delay time (tg) / for G-tripping / with I0t characteristic | |
| <ul style="list-style-type: none"> • minimum • maximum | 0.1 s 0.3 s |
| adjustable setting current (InN) / for N-tripping | |
| <ul style="list-style-type: none"> • minimum • maximum | 200 A 1 000 A |
| design of the N-conductor protection | adjustable OFF; 50%; 100% |
| product function / grounding protection | Yes |
| Mechanical Design | |
| product component | |
| <ul style="list-style-type: none"> • undervoltage release • voltage trigger • trip indicator | No No No |
| height [in] | 12.6 in |
| height | 320 mm |
| width [in] | 11.02 in |
| width | 280 mm |
| depth [in] | 4.72 in |
| depth | 120 mm |
| Connections | |
| arrangement of electrical connectors / for main current circuit | Front terminal |
| type of electrical connection / for main current circuit | on both sides nut keeper kit |
| type of connectable conductor cross-sections / for flat-bar terminal connection / minimum | 20 x 4 mm |
| type of connectable conductor cross-sections / for flat-bar terminal connection / maximum | 50 x 28 mm |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) | silver |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) | silver |

| Auxiliary circuit | |
|--|--------|
| number of CO contacts / for auxiliary contacts | 0 |
| Accessories | |
| product extension / optional / motor drive | No |
| Environmental conditions | |
| protection class IP / on the front | IP40 |
| ambient temperature | |
| • during operation / minimum | -25 °C |
| • during operation / maximum | 70 °C |
| • during storage / minimum | -40 °C |
| • during storage / maximum | 80 °C |
| reference code / according to IEC 81346-2 | Q |

Approvals / Certificates

General Product Approval



[Miscellaneous](#)



[Confirmation](#)



| EMV | Test Certificates | Maritime application | | | |
|-----|-------------------|----------------------|--|--|--|
|-----|-------------------|----------------------|--|--|--|



[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

[Special Test Certificate](#)



| Maritime application | other | | | | |
|----------------------|-------|--|--|--|--|
|----------------------|-------|--|--|--|--|



[CCS \(China Classification Society\)](#)

[Miscellaneous](#)

[Miscellaneous](#)

| other | Dangerous goods | Environment | | |
|-------|-----------------|-------------|--|--|
|-------|-----------------|-------------|--|--|

[Confirmation](#)




[Transport Information](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2510-6HM42-0AA0>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VA2510-6HM42-0AA0>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2510-6HM42-0AA0
- CAx-Online-Generator
<https://www.siemens.com/cax>
- Tender specifications
<https://www.siemens.com/specifications>
- Characteristic curves
[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

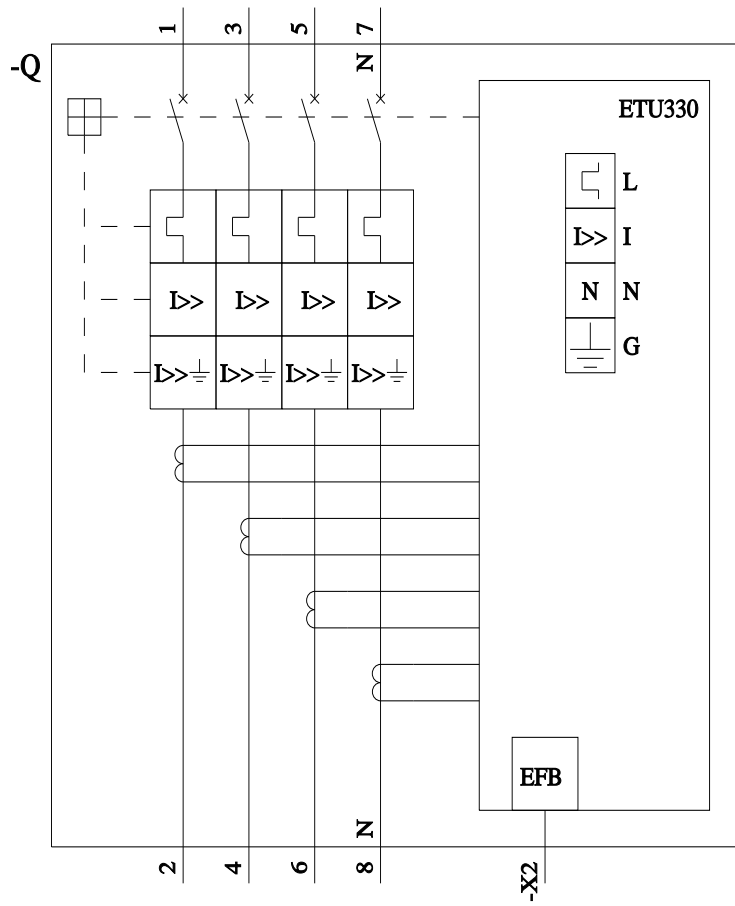

last modified:

4/3/2025

