

3-phase busbar with infeed left for 2 circuit breakers Size S00 and S0

product brand name	SIRIUS
product category	Infeed systems
product designation	3-phase busbar
design of the product	for 2 switches with infeed on the left
product type designation	3RV29
suitability for use	circuit-breakers 3RV2
<b>General technical data</b>	
certificate of suitability	CE / UL / CSA / CCC
size of the circuit-breaker	S00, S0
power loss [W] for rated value of the current at AC in hot operating state per pole	4.52 W
type of calculation of power loss current-dependent	quadratic
surge voltage resistance rated value	6 kV
protection class IP on the front according to IEC 60529	IP00
thermal current	63 A
Substance Prohibitance (day/month/year)	10/01/2009
Net Weight	427 g
number of poles for main current circuit	3
operating voltage at AC rated value	500 V
operational current rated value	63 A
<b>UL/CSA ratings</b>	
operating voltage at AC according to UL rated value	600 V
<b>Ambient conditions</b>	
ambient temperature during operation	-20 ... +60 °C
<b>Electrical Safety</b>	
protection class IP on the front according to IEC 60529	IP00; IP20 when using finely stranded conductor cross-section 6 mm <sup>2</sup> with end sleeve (with plastic collar) or conductor cross-section ≥ 10 mm <sup>2</sup> at the infeed terminal
touch protection on the front according to IEC 60529	finger-safe when using finely stranded conductor cross-section 6 mm <sup>2</sup> and end sleeve (with plastic collar) or conductor cross-section ≥ 10 mm <sup>2</sup> at the supply terminal
<b>Short-circuit protection</b>	
short-circuit rating	see table in the operating instructions
<b>Installation/ mounting/ dimensions</b>	
mounting position	any
fastening method	snap-on fastening on 35 mm DIN rail
height	129 mm
width	110 mm
depth	87 mm
required spacing	

- with side-by-side mounting
  - backwards 0 mm
  - upwards 10 mm
  - at the side 0 mm
- for grounded parts
  - backwards 0 mm
  - upwards 10 mm
  - at the side 0 mm
- for live parts
  - backwards 0 mm
  - upwards 10 mm
  - at the side 0 mm

#### Connections/ Terminals

type of electrical connection for main current circuit      spring-loaded terminals

#### Approvals Certificates

##### Environmental Product Declaration

- global warming potential [CO2 eq] / during manufacturing 2.47 kg
- global warming potential [CO2 eq] / during operation 68.6 kg
- global warming potential [CO2 eq] / after end of life -0.129 kg
- global warming potential [CO2 eq] / total 70.9 kg

##### Environment

##### General Product Approval

[Environmental Con-  
firmations](#)



##### Test Certificates

##### Maritime application

[Special Test Certific-  
ate](#)

[Type Test Certific-  
ates/Test Report](#)



##### Maritime application

##### other



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



##### Railway

[Special Test Certific-  
ate](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2917-1A>


##### Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-1A>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-1A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

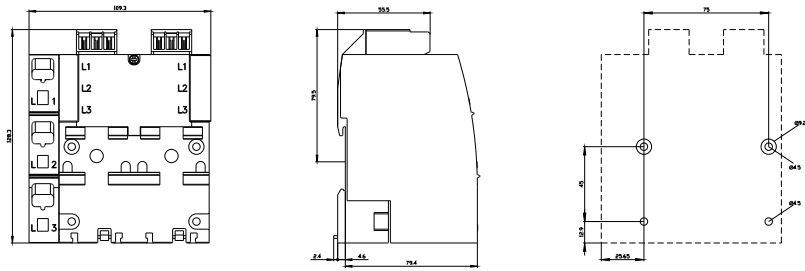

last modified:

6/30/2025 